


Features

- ◆ Ultracompact DIP 16 package
- ◆ I/O isolation 3000 VACrms rated for 300 Vrms working voltage
- ◆ Medical safety to UL 60601-1 and IEC/EN 60601-1 3rd edition, 2 x MOOP
- ◆ Industrial safety to IEC/EN/UL 60950-1
- ◆ Operating temp. range -40°C to $+71^{\circ}\text{C}$
- ◆ 3-years product warranty

CB
Scheme
IEC 60950-1
IEC 60601-1

CSA
c
us
UL 60950-1
UL 60601-1



The THI 2M series is a new range of ultra-compact 2W DC/DC-converters providing a high I/O-isolation voltage of 3000 VAC. With a reinforced I/O-isolation system this product is an economical solution for many applications in instrumentation, industrial controls, medical equipment and everywhere where supplementary- or reinforced insulation is required to meet requested safety standards. Full SMD-design with exclusive use of ceramic capacitors ensure a very high reliability and a long product lifetime.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THI 2-0511M	5.0 VDC \pm 10% (nominal 5 VDC)	5 VDC	400 mA	66 %
THI 2-0512M		12 VDC	165 mA	66 %
THI 2-0513M		15 VDC	133 mA	66 %
THI 2-0522M		\pm 12 VDC	\pm 83 mA	72 %
THI 2-0523M		\pm 15 VDC	\pm 66 mA	73 %
THI 2-1211M	12.0 VDC \pm 10% (nominal 12 VDC)	5 VDC	400 mA	66 %
THI 2-1212M		12 VDC	165 mA	66 %
THI 2-1213M		15 VDC	133 mA	66 %
THI 2-1222M		\pm 12 VDC	\pm 83 mA	74 %
THI 2-1223M		\pm 15 VDC	\pm 66 mA	75 %
THI 2-2411M	24 VDC \pm 10% (nominal 24 VDC)	5 VDC	400 mA	66 %
THI 2-2412M		12 VDC	165 mA	66 %
THI 2-2413M		15 VDC	133 mA	66 %
THI 2-2422M		\pm 12 VDC	\pm 83 mA	74 %
THI 2-2423M		\pm 15 VDC	\pm 66 mA	75 %

Input Specifications

Input current no load	5 Vin models: 60 mA 12 Vin models: 30 mA 24 Vin models: 15 mA
Recommended external input fuse (slow blow)	5 Vin models: 1.0 A 12 Vin models: 0.5 A 24 Vin models: 0.2 A
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.

Input filter

internal capacitors

Output Specifications

Voltage set accuracy	±4 %
Voltage balance (dual output models)	1 % max.
Regulation	– Input variation – Load variation 20 – 100 %
	1.2 % / 1.5 % change of Vin 10 % max. 12 % max. for 5 Vout models.
Ripple and noise (0–20 MHz Bandwidth)	150 mVpk-pk max
Temperature coefficient	±0.02 %/K
Short circuit protection	0.5 sec. max. (automatic recovery)
Minimum load	2 % of rated max. current
Capacitive load	single output models: 330 µF max. dual output models: 100 µF max. (each output)

General Specifications

Temperature ranges	– Operating – Storage – Case temperature	–40°C to +71°C –50°C to +125°C +90°C max.
Thermal impedance		22.5 K/W
Derating		2.5 %/K above 60°C
Humidity (non condensing)		95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at 25°C, ground benign)		>2.0 Mio h
Isolation voltage – Input/Output (50Hz, 60sec)	Medical applications in accordance to IEC/EN 60601-1: IT applications in accordance to IEC/EN 60950-1:	Reinforced, rated for 300 Vrms working voltage 3000 VAC, 2 x MOOP 4000 VAC
Isolation test voltage (1 sec.)		6'000 Vpk
Leakage current (at 240VAC, 60Hz)		2 µA max.
Isolation capacitance	– Input/Output	20 pF max. (at 100KHz, 1V)
Isolation resistance	– Input/Output	>10 Gohm (at 500VDC)
Switching frequency		50 – 100 kHz (PFM)
Safety standards		IEC/EN 60950-1, UL 60950-1 CSA C22.2 No. 60950-1-03 IEC/EN 60601-1 3rd edition, 2 x MOOP, UL 60601-1, CSA C22.2 No. 601.1 www.tracopower.com/overview/thi2m
Environmental compliance	– Reach – RoHS	www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


General Specifications

Casing material	non conductive plastic (UL 94V-0 rated)
Pin material	copper alloy with gold plated nickel subplate
Weight	5.1 g (0.18oz)
Altitude during operation	up to 5'000 m approved
Soldering temperature	max. 265°C / 10 sec

Supporting Documents: www.tracopower.com/overview/thi2m

- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.

Outline Dimensions

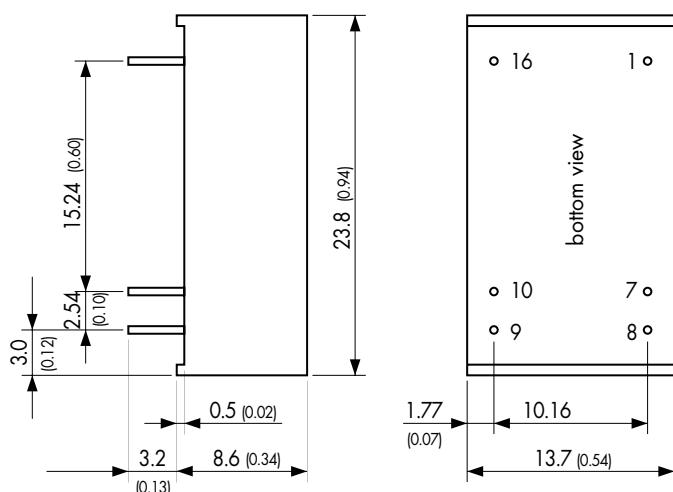

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

Dimensions in [mm], () = Inch
Pin diameter: 0.5 ±0.05 (0.02 ±0.002)
Tolerances: ±0.25 (±0.01)
Pin pitch tolerances: ±0.05 (±0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[THI 2-0511M](#) [THI 2-0513M](#) [THI 2-1213M](#) [THI 2-1211M](#) [THI 2-1212M](#) [THI 2-0512M](#) [THI 2-0523M](#) [THI 2-2423M](#)
[THI 2-1222M](#) [THI 2-1223M](#) [THI 2-2422M](#) [THI 2-2412M](#) [THI 2-2411M](#) [THI 2-0522M](#) [THI 2-2413M](#)