

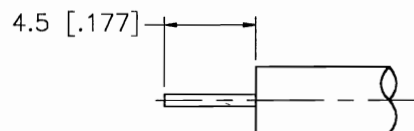



REV.	DATE	DESCRIPTION
A	11/28/99	UPDATE DESCRIPTION

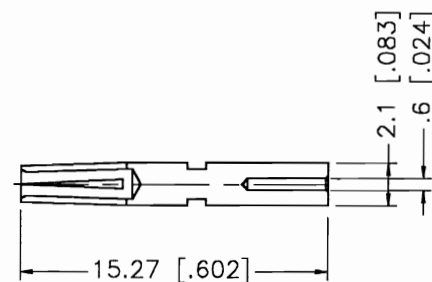

RECOMMENDED
CABLE STRIPPING DIM'S

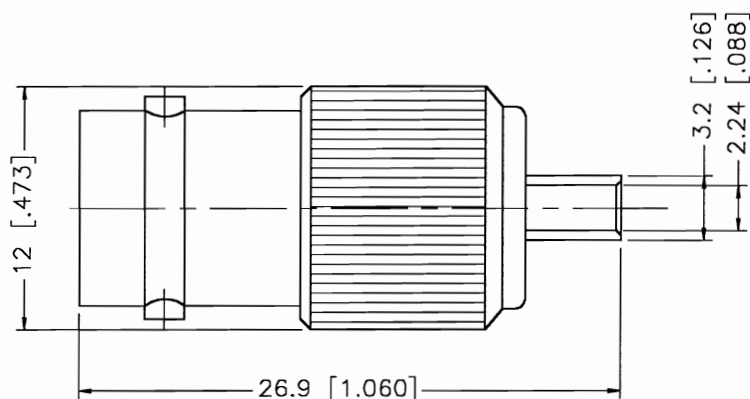

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE						
1	BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	11/28/99	TITLE BNC CRIMP JACK (FOR .085 SEMI RIGID CABLE)				
2	BARREL	BRASS	GOLD		CHECKED							
3	INSULATOR	TEFLON	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED		SIZE			FSCM NO.	DWG. NO.	REV.
4	CONTACT PIN	PHOS. BRONZE	GOLD				A	99001	112615.DWG			A
5												
6												
7												
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	112615	SHEET	1 OF 1

Connex Connector Corporation			
TITLE BNC CRIMP JACK (FOR .085 SEMI RIGID CABLE)			
SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	112615.DWG	A
SCALE	PART NO.	SHEET	
NA	112615	1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112615](#)