

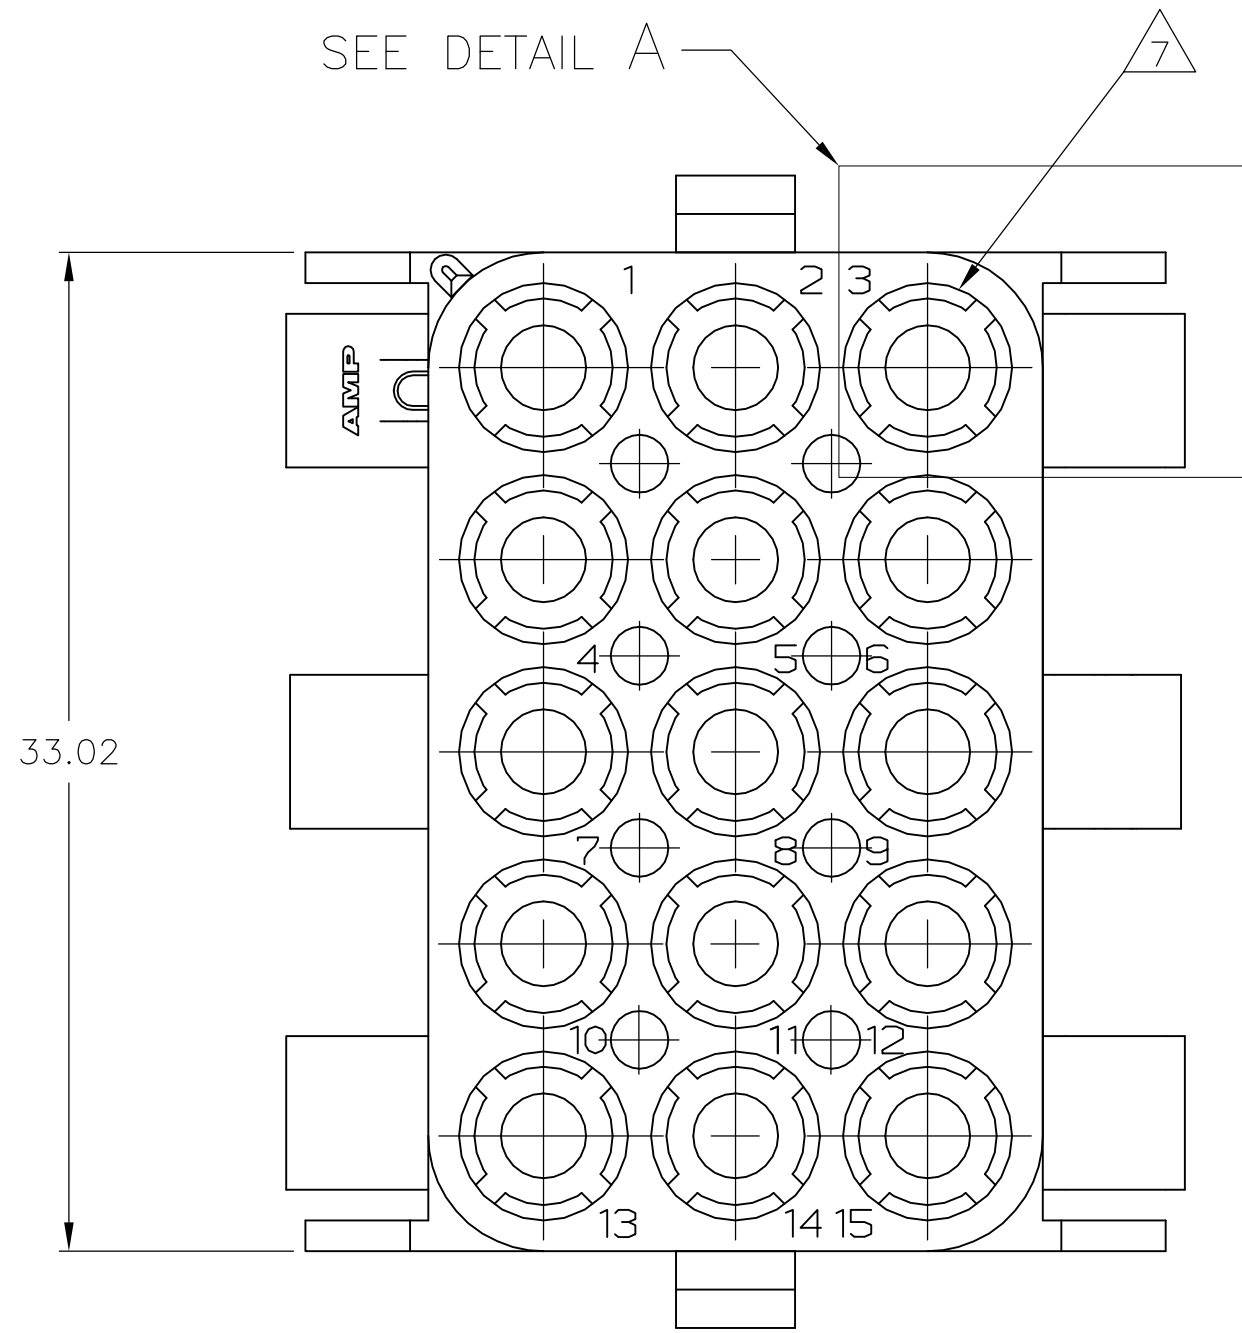
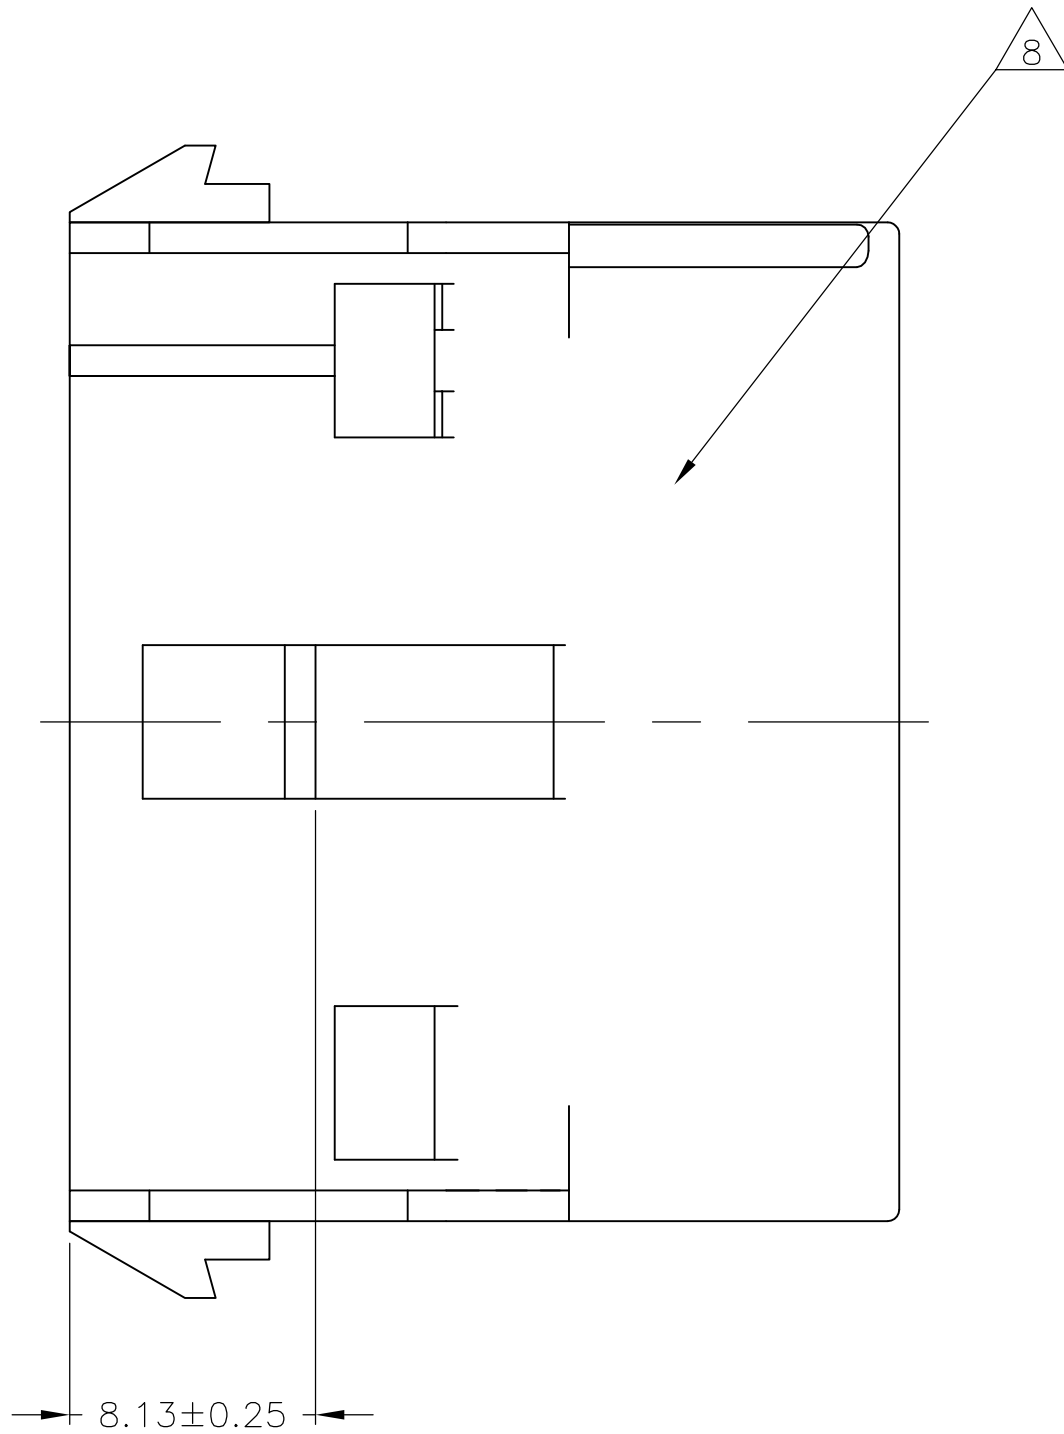
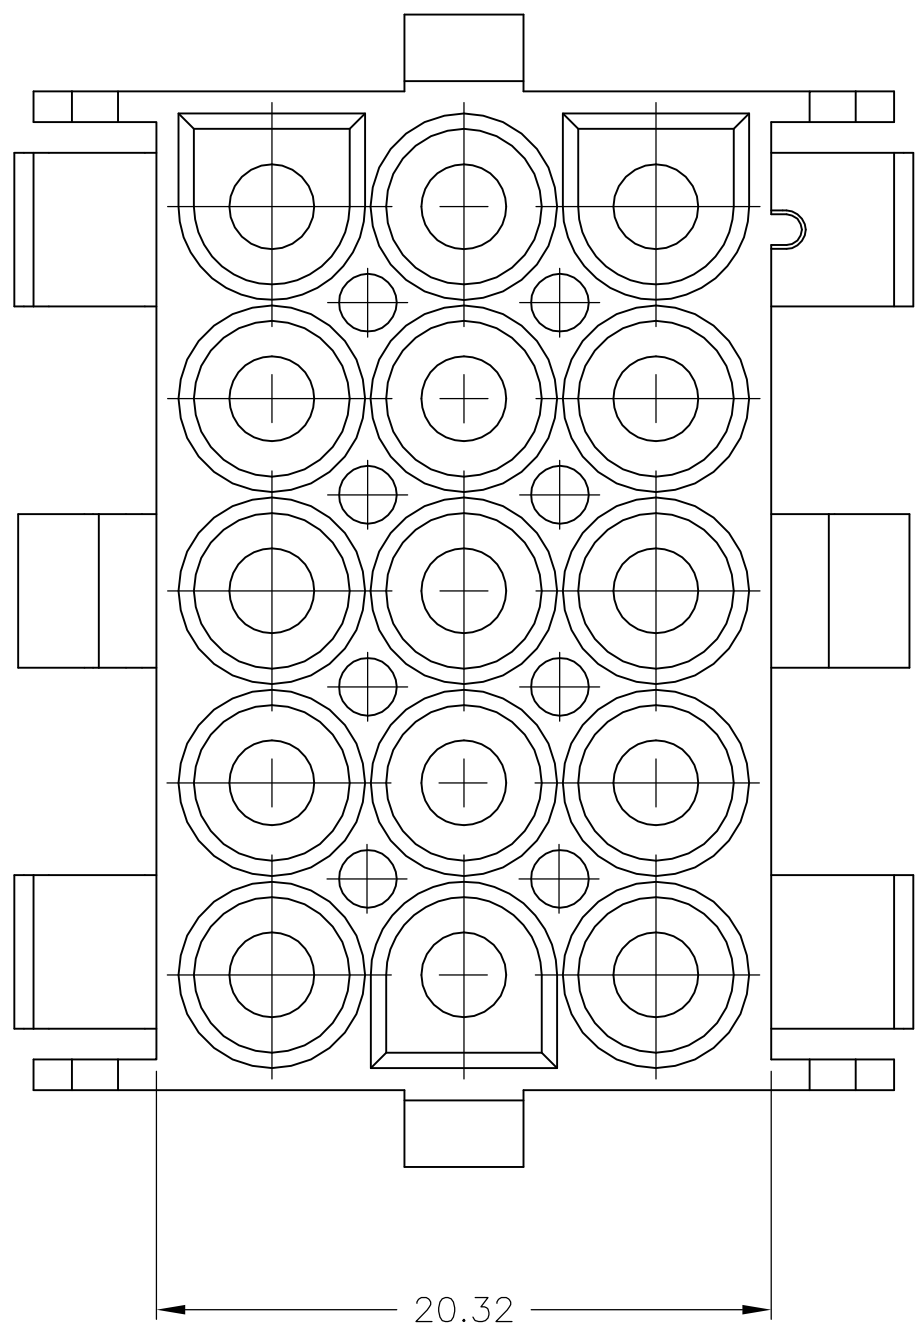
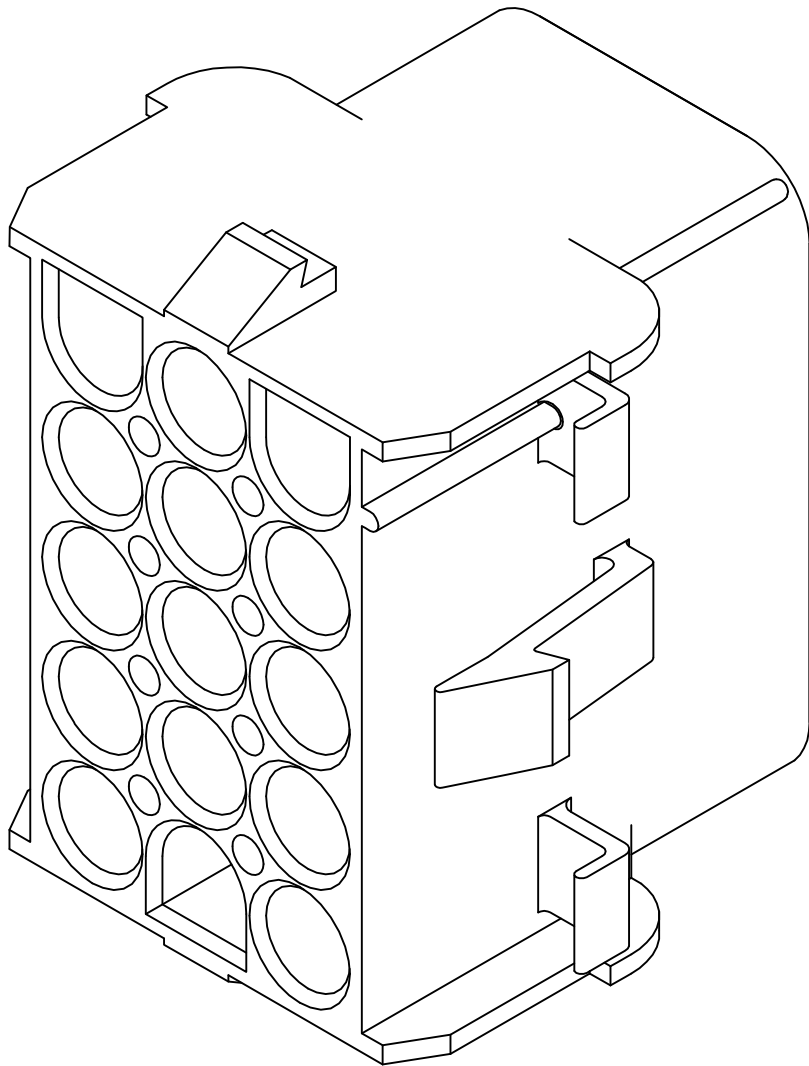
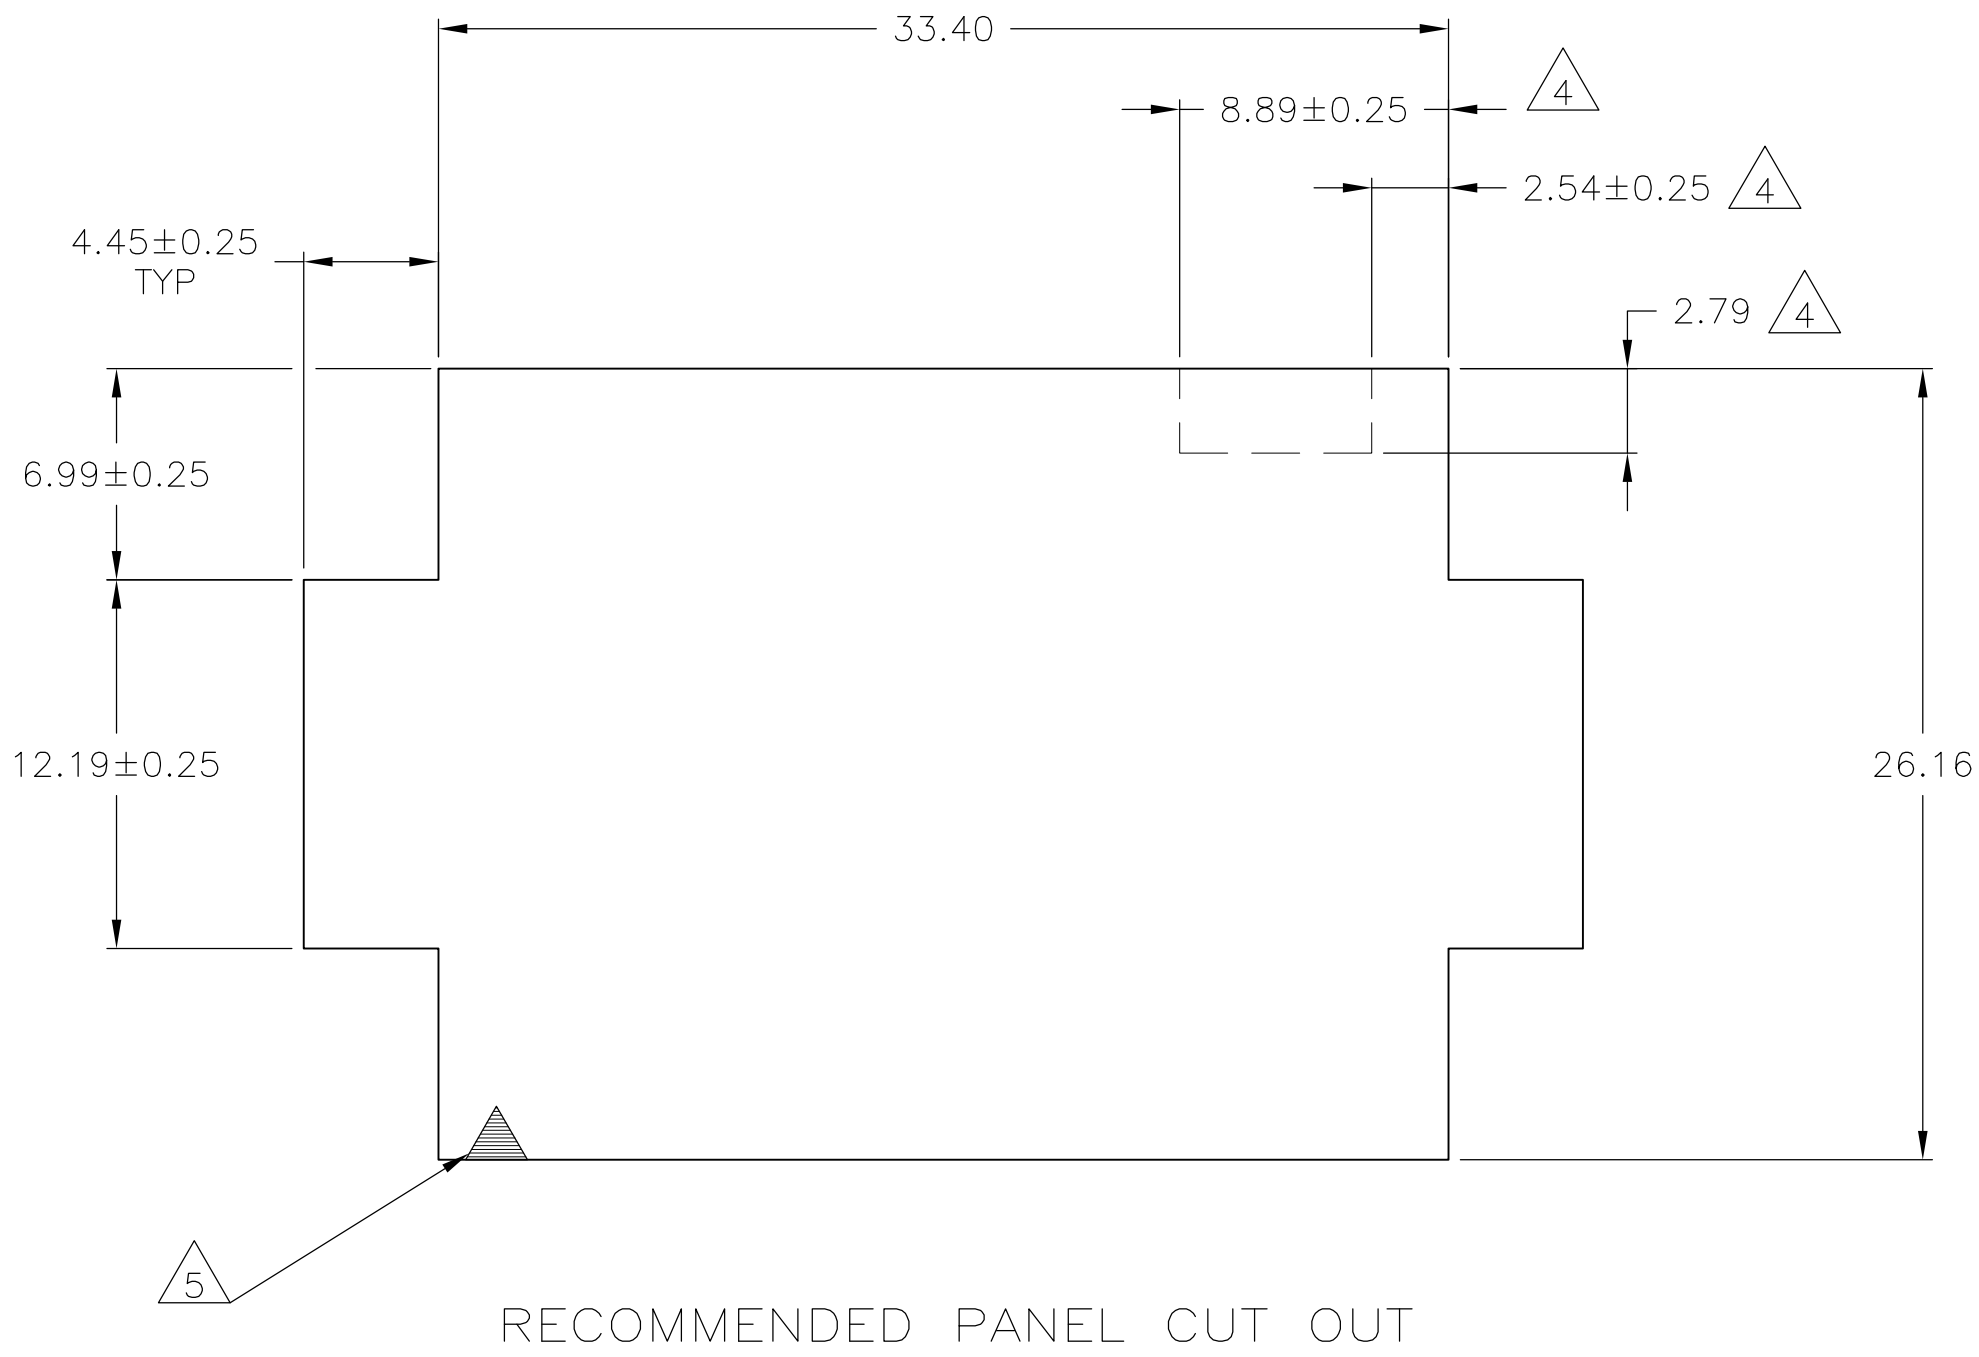


LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			AJ3	REVISED PER ECR-17-008392			26JUN2017	BW	KR

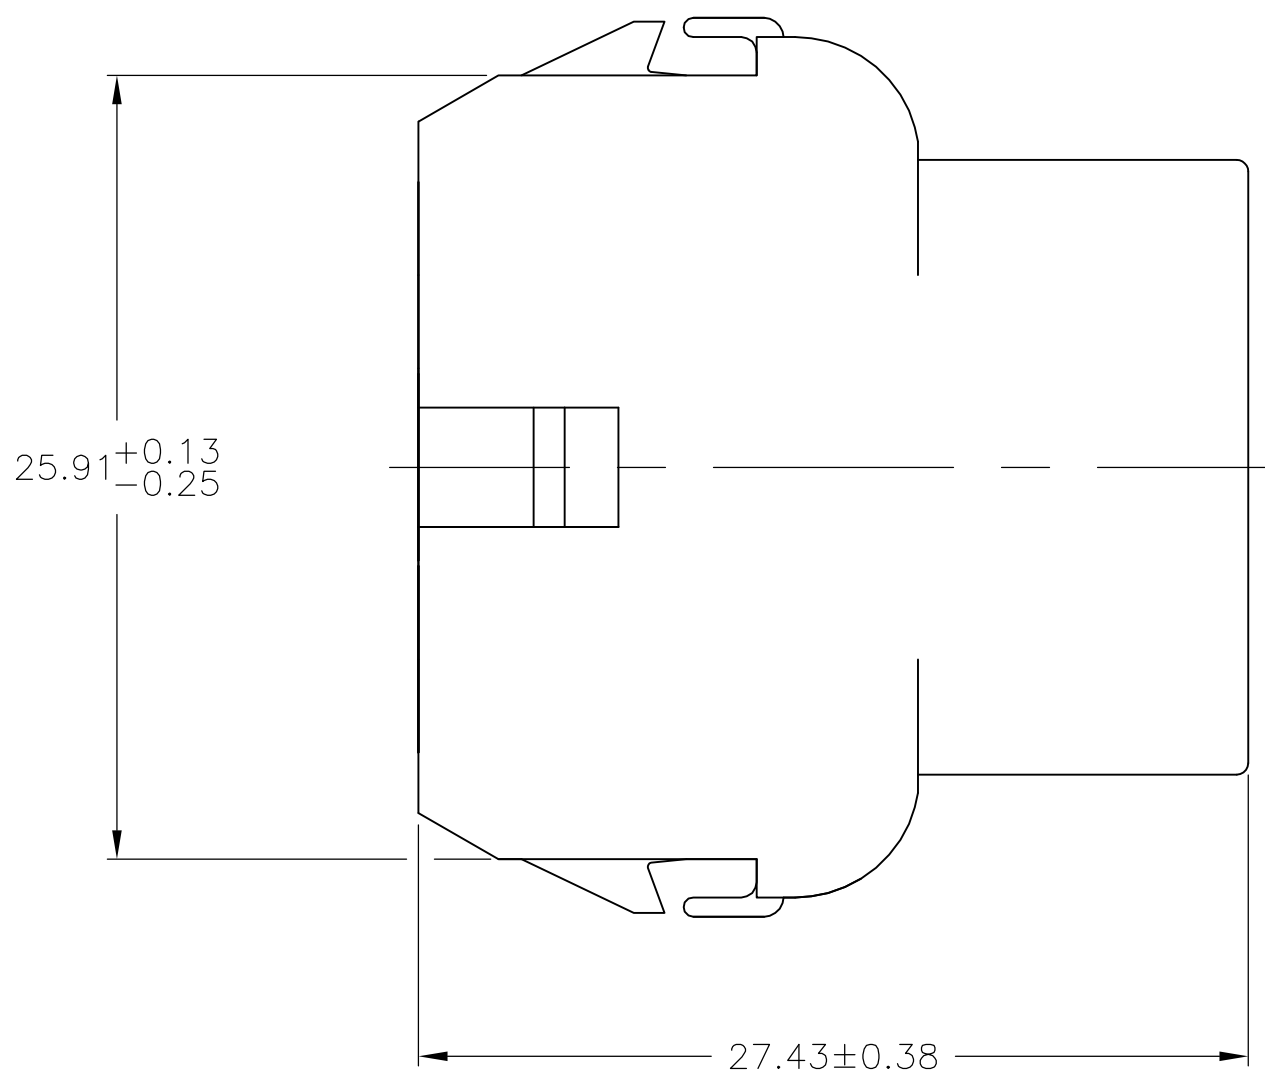

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
 2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
 3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4 OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5 CIRCUIT NUMBER 1 LOCATION.
- 6 DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- 7 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

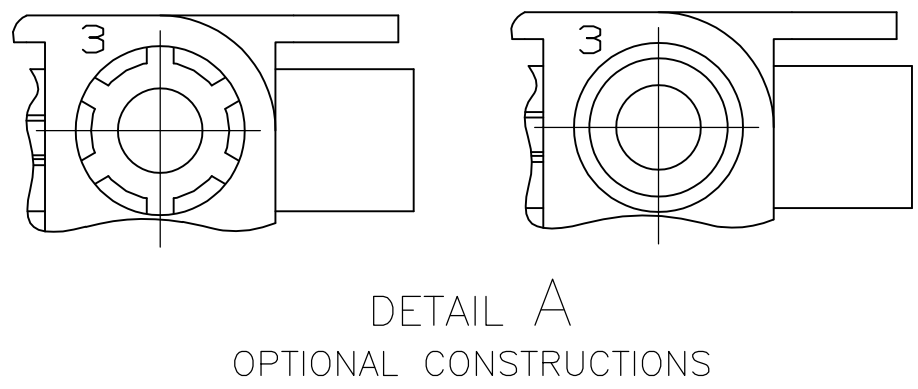

6.99	.275	33.40	1.315
4.45	.175	33.02	1.300
2.79	.110	27.43	1.080
2.54	.100	26.16	1.030
2.29	.090	25.91	1.020
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.89	.350
0.13	.005	8.13	.320
MM	IN	MM	IN






CONVERSION TABLE

9	OBSOLETE	BLACK	1-480711-9
		GRAY	1-480711-8
9	SUPERSEDED BY 1-480711-0	BLUE	1-480711-6
		GREEN	1-480711-5
9	SUPERSEDED BY 1-480711-0	YELLOW	1-480711-4
		ORANGE	1-480711-3
9	SUPERSEDED BY 1-480711-0	RED	1-480711-2
		BROWN	1-480711-1
9	SUPERSEDED BY 1-480711-0	NATURAL	1-480711-0
		COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 29JUL2004	TE Connectivity	
DIMENSIONS: mm		CHK S. RIDGILL 29JUL2004	NAME CAP, 15 CIRCUIT, UNIVERSAL MATE-N-LOK™	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 29JUL2004	PRODUCT SPEC	
0.13		APPL	APPLICATION SPEC	
MATERIAL NYLON, UL94V-2		WEIGHT	SIZE A1	
FINISH -		SCALE 4:1	SHEET 1 OF 2	
CUSTOMER DRAWING		REV AJ3	RESTRICTED TO -	

LOC		DIST		REVISONS			
CM	00	#	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

- 1 . STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

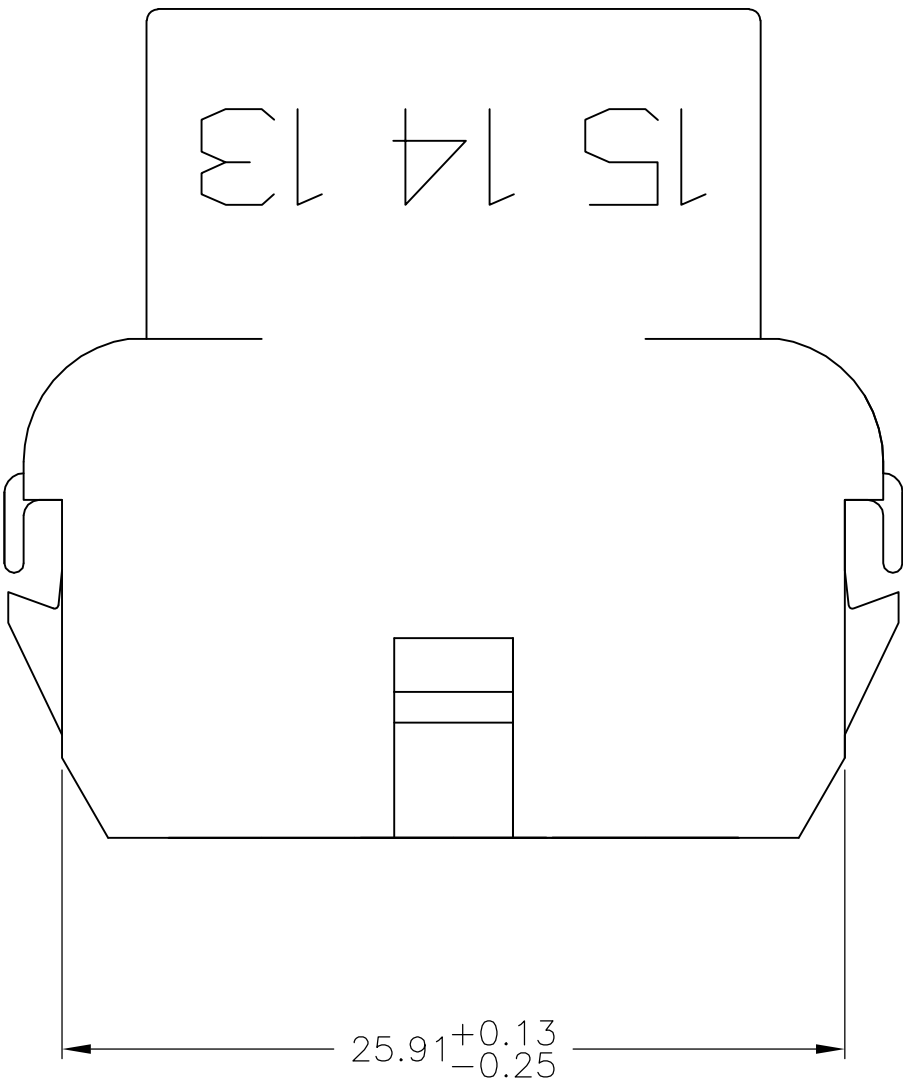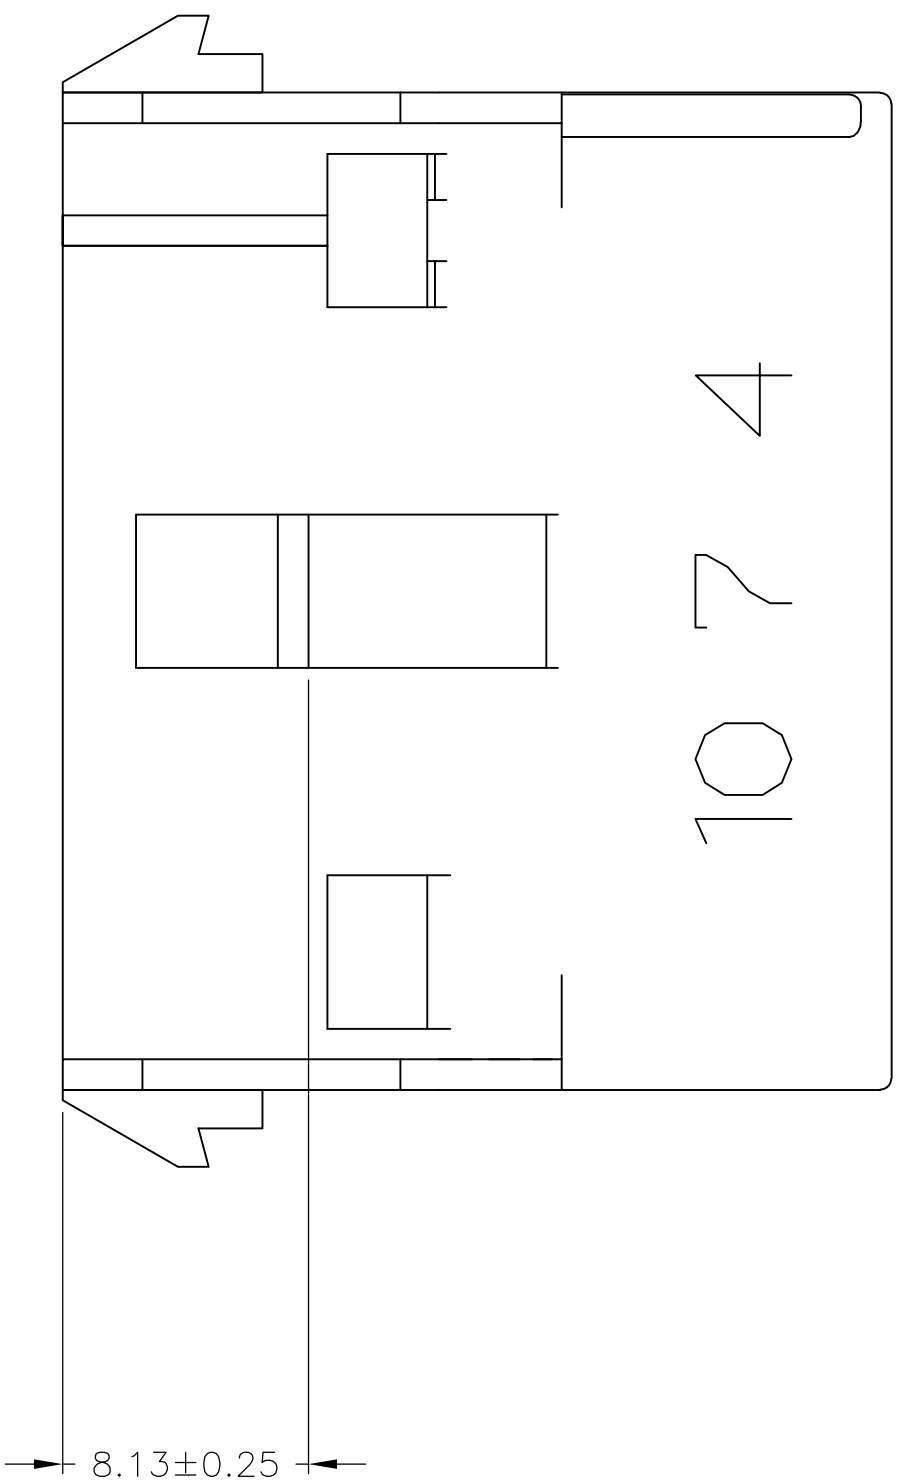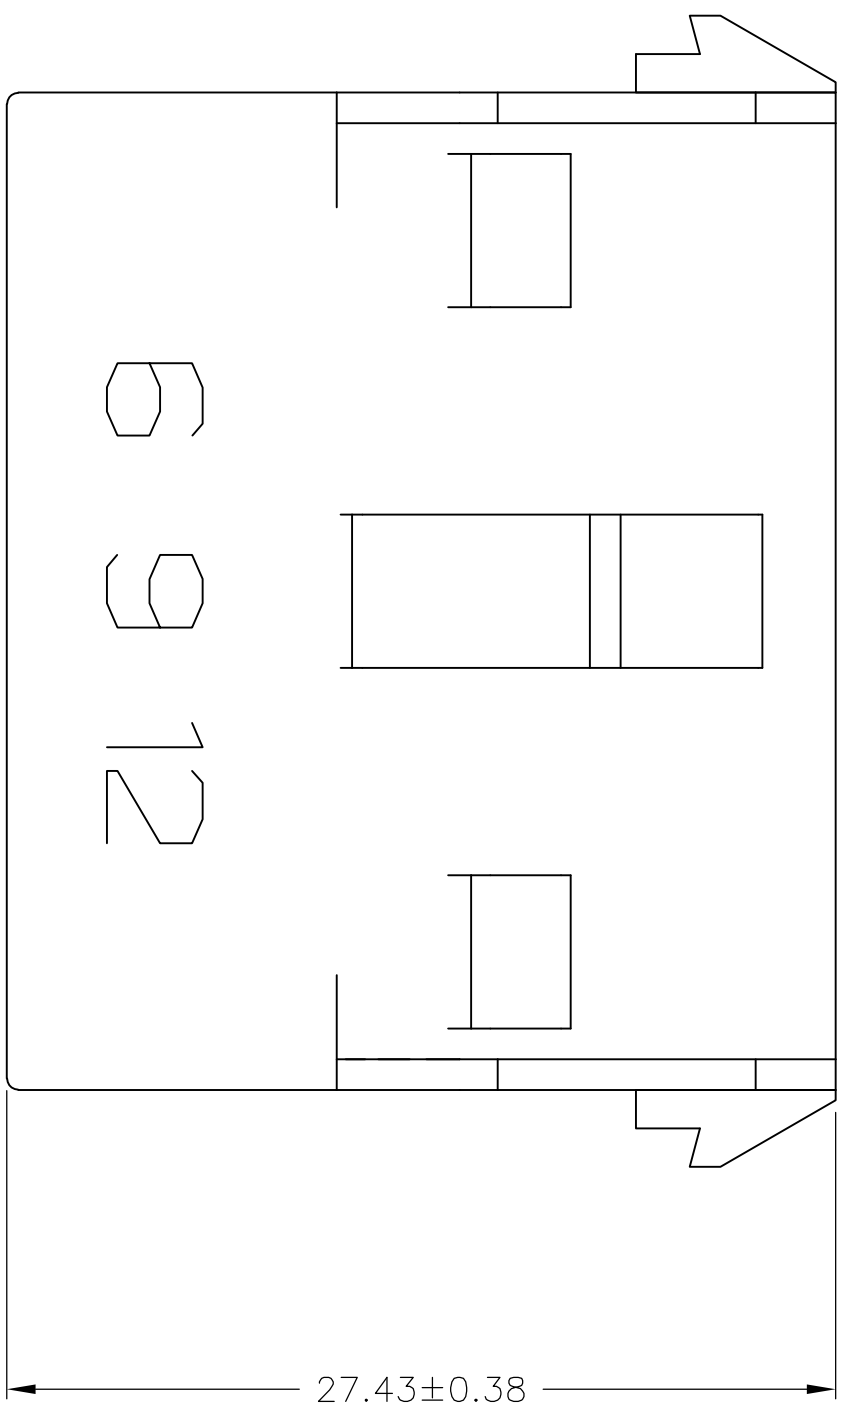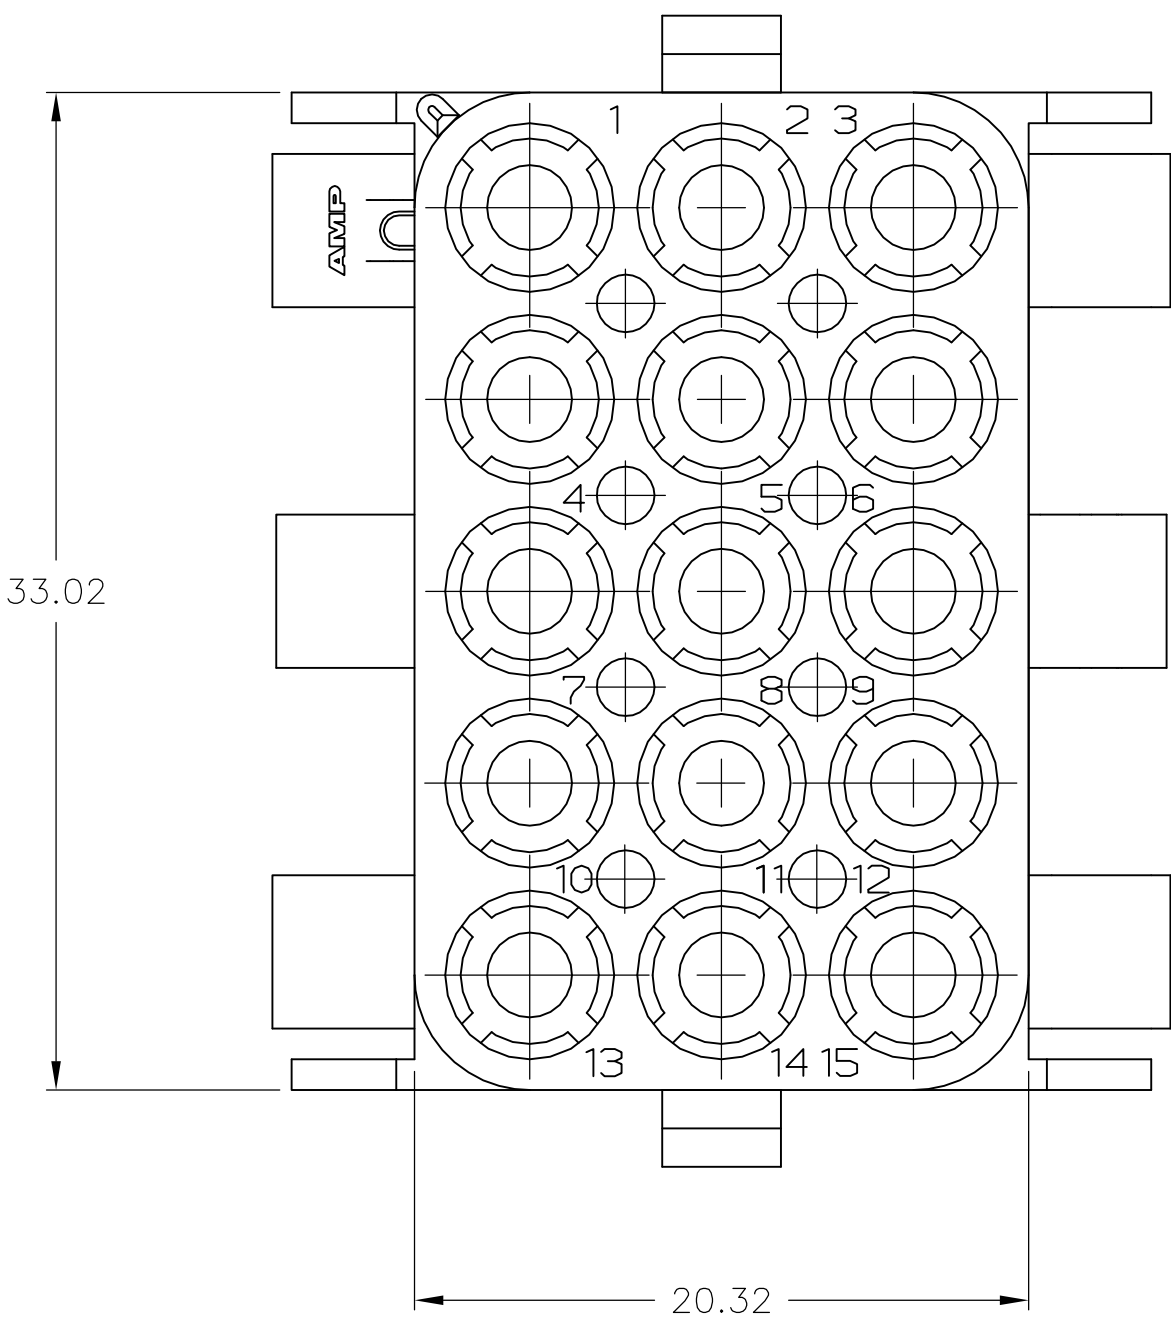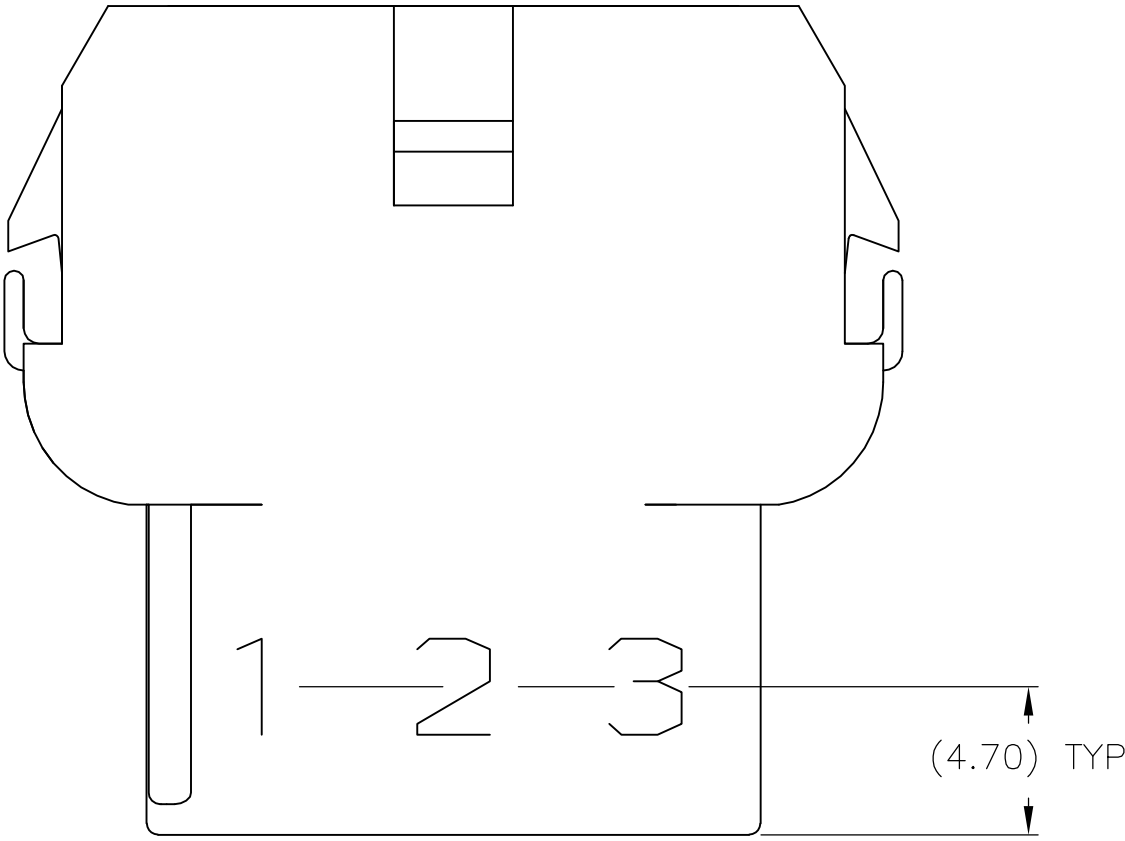

5.08	.200	-	-
4.70	.185	33.02	1.300
3.18	.125	27.43	1.080
0.38	.015	25.91	1.020
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	29JUL2004	 TE Connectivity						
		CHK S. RIDGILL	29JUL2004							
DIMENSIONS: mm		APVD S. RIDGILL	29JUL2004	NAME	CAP, 15 CIRCUIT, UNIVERSAL MATE-N-LOK TM					
		PRODUCT SPEC								
		APPLICATION SPEC								
		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO				
		MATERIAL NYLON. UL94V-2		WEIGHT		A1	-	480711		
		CUSTOMER DRAWING		SCALE		4:1	SHEET	2 OF 2	REV	A/J3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-480711-0](#)