
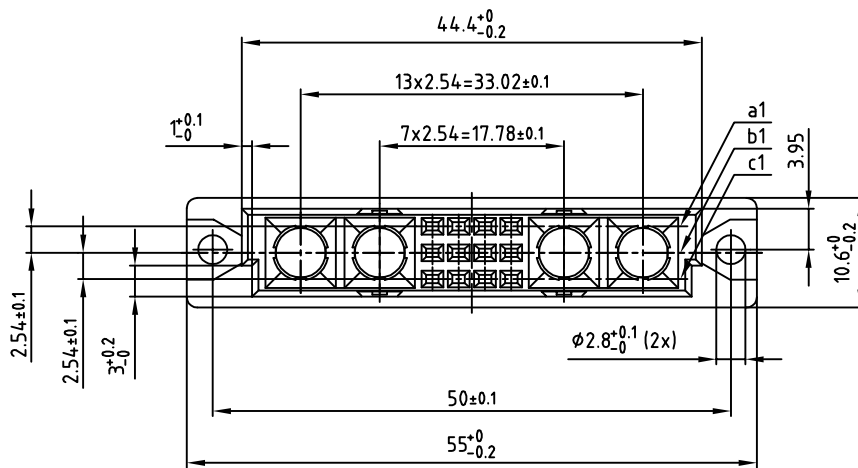
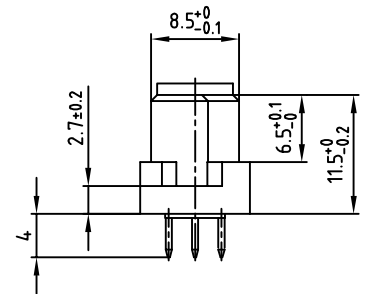


used for: DIN EN 60603 TYPE "M 1/2"

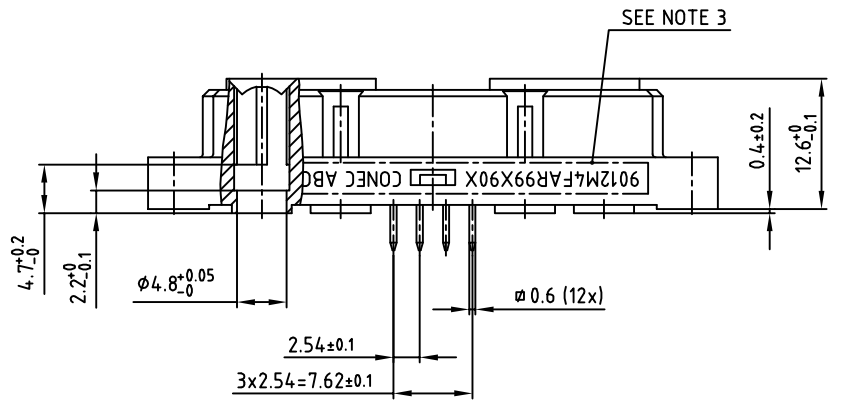


NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES

3. CONNECTOR IS PART MARKED: 9012M4FAR99X90X CONEC ABC

P.C.B. HOLE DRILLINGS

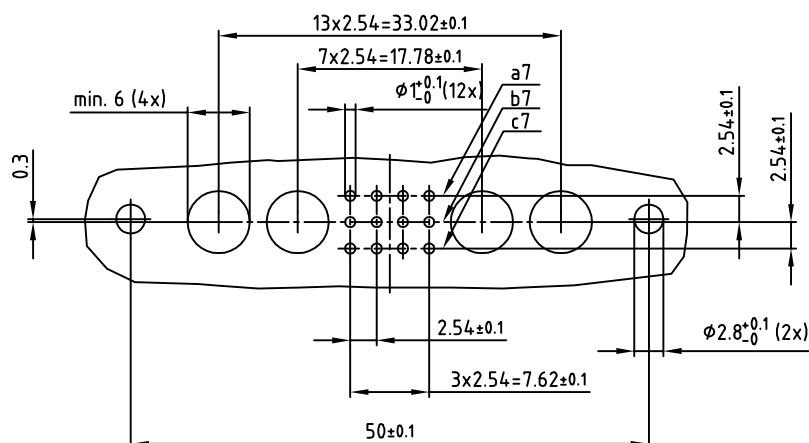

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		
dim. in mm		
2009	date	name
drawn	18.02.	Sonnenberg
appd.	18.02.	Koch
norm	DIN 60603	
d-old		



scale:	2:1
material:	SEE NOTES
title:	FEMALE CONNECTOR TYPE "M 1/2" 12+4pos. SOLDER PIN STRAIGHT
dwg no:	AutoCAD 2006
12K1A624	DIN-A
part no: 9012M4FAR99X90X	3 sh: 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CONEC:

9012M4FAR99X90X