


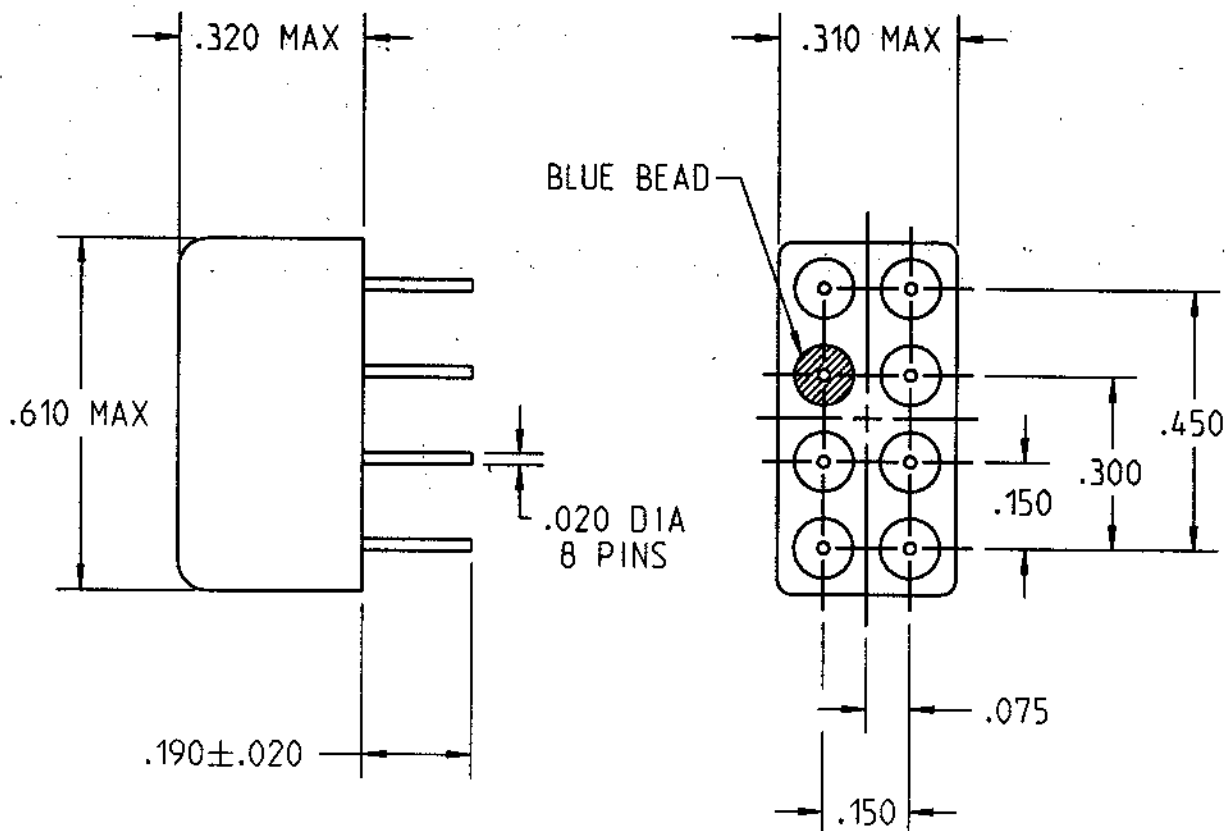

REV. 0
DCO 143675


COIL: @ 25°C
 RESISTANCE 44 OHMS ±10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.4 VDC
 MUST RELEASE 1.45 VDC MAX, 0.26 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 Hz TO 3000 Hz @ 30 g's
 SHOCK 100 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE & RELEASE 4 MS MAX.
BOUNCE 1.5 MS MAX.
DIELECTRIC 500 VAC - ALL POINTS

CUST. C.I.I. STD.
 CUST. NO. _____ REV. _____

"3SBC" RELAY

CUSTOMER DATA SHEET

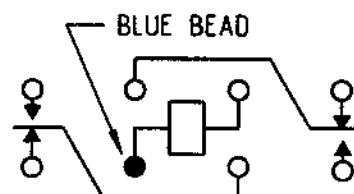

TERMINAL VIEW

CONTACT RATING: 2A 28VDC RES.
0.5A 28VDC IND. L/R .008 MAX., 0.5A
115VAC CASE UNGROUNDED, .125A 115VAC
CASE GROUNDED RES., 100,000 OPS

DR. ASB 16 OCT 02

CK.

CII Technologies
 advanced control electronic solutions

3SBC5004A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC5004A1](#)