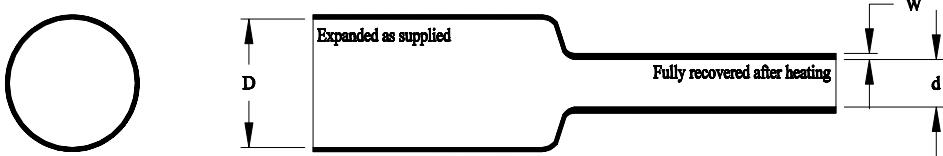


## HF Highly Flexible Heat-Shrinkable Tubing



**Table 1: Dimensions**

SIZE	As Supplied		Recovered	
	Inside Diameter Minimum (D)	Inside Diameter Maximum (d)	Wall Thickness Nominal (W)	
-04	0.400 (10)	0.150 (4)	0.070 (1.8)	
-07	0.750 (19)	0.220 (6)	0.070 (1.8)	
-11	1.100 (28)	0.380 (10)	0.105 (2.7)	
-13	1.300 (33)	0.380 (10)	0.105 (2.7)	
-15	1.500 (38)	0.500 (13)	0.12 (3.0)	
-17	1.700 (43)	0.500 (13)	0.120 (3.0)	
-20	2.000 (51)	0.750 (19)	0.140 (3.6)	
-27	2.700 (69)	0.900 (23)	0.155 (3.9)	

**Properties:**

**HI-FLEX** tubing is highly flexible and is fabricated from thermally stabilized flame retarded, cross linked modified polyolefin. The color shall be black, unless otherwise specified. **HI-FLEX** tubing meets the material requirements in RW 2023. Tests are performed on uncoated tubing.

© 2006 Tyco Electronics Corporation. All rights reserved

Specification Control Drawing

<b>tyco</b> Electronics	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	<b>Raychem</b>	Title: <b>HF</b> <b>Highly Flexible Heat-shrinkable</b> <b>Tubing</b>		
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application		Document No : <b>HF</b>			
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Jun-06	Rev.: C	Sheet: 1 of 2

If this document is printed it becomes uncontrolled. Check for the latest revision.

## ORDERING INFORMATION

HF - 17 FR X 4 / NM

“NM”  
No mark (See Note)

LENGTH  
In feet (4 & 25 standard)

“FR”  
Flame retardant

SIZE  
(See Table 1)

FAMILY

**Note:**

Standard marking is white ink for black tubing. Expanded and recovered dimensions will be printed in inches and millimeters. HF will be printed on material.

Rev. Date: 30-Jun-06	Rev.: C	Document No. HF	Sheet:: 2 of 2
-------------------------	------------	--------------------	-------------------

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[CB5091-000](#)