

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0190170050

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

InsulKrimp Quick Disconnect, Female, for 10-12 (5.00-3.30mm²) Wire, Mylar Tape, Tab 6.35 x 0.81mm

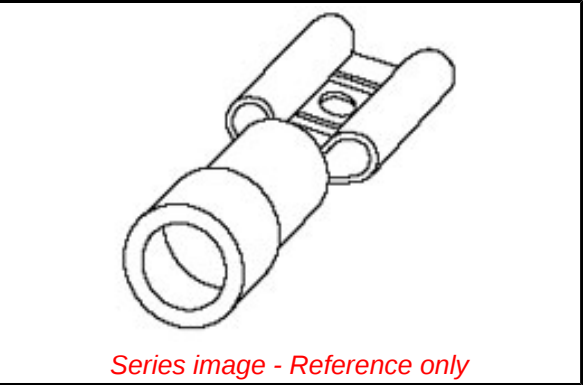

Documents:

3D Model

Drawing (PDF)

Product Specification PS-19902-011-001 (PDF)

Product Specification PS-19902-015-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR18689
UL	E79133
General	
Product Family	Quick Disconnects
Series	19017
Crimp Quality Equipment	Yes
Insulated	Partial
Overview	Standard Quick-Disconnect Terminals
Product Name	InsulKrimp
Type	Quick Disconnect
UPC	800753036390
Physical	
Barrel Type	Closed
Color - Resin	Yellow
Flammability	94V-0
Gender	Female
Glow-Wire Capable	No
Insulation	PVC
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	PVC
Net Weight	1.289/g
Orientation	Straight
Packaging Type	Adhesive Tape on Reel
Polarized to Mating Part	No
Tab Thickness	0.81mm
Tab Width	6.35mm
Temperature Range - Operating	-50° to +105°C
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	6.40mm max.
Wire Size AWG	10, 12
Electrical	
Voltage - Maximum	600V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Engineering Number	C-2143T
Reference - Drawing Numbers	

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

19017 Series

This document was generated on 11/05/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[19017-0050](#)