

## Power Relay RM 5/6/B 3mm

- 2 and 3 pole 10/16A, 2 form A (2 NO) or 3 form A (3 NO) contacts
- 3mm contact gap
- DC or AC coil
- Push-to-test button
- Plug-in version, PCB terminals, chassis or DIN rail mount

Typical applications  
Power supplies, pump control.



## Approvals




VDE Cert. No. 40003144, UL E214025 (for RMB in preparation)

Technical data of approved types on request.

Contact Data		RM5	RM6	RMB
Contact arrangement		2 form A	3 form A	3 form A
		2 NO	3 NO	3 NO
Contact gap		3mm	3mm	3mm
Rated voltage		400VAC	230VAC	230VAC
Max. switching voltage		440VAC	400VAC	400VAC
Rated current		16A	10A	16A
Limiting making current, max 20ms		30A	25A	30A
Switching power		6000VA	3800VA	6000VA
Contact material		AgCdO,		
		AgNi90/10 for RM5 (VDE for RM6 and RMB in preparation)		
Min. recommended contact load		24VDC/100mA		
Frequency of operation, with/without load		960/6000h <sup>-1</sup>		
Operate/release time max., DC coil		20/5ms		
Bounce time max., form A, DC coil		4ms		

## Contact ratings

Type	Contact	Load	Cycles
<b>IEC 61810</b>			
RM5	A (NO)	16A, 230/400VAC, cosφ=1, 35°C	100x10 <sup>3</sup>
RM5	A (NO)	10A, 48VDC, 70°C	30x10 <sup>3</sup>
RM5	A (NO)	10A, 400VAC, 70°C	30x10 <sup>3</sup>
RM60	A (NO)	10A, 230/400VAC, cosφ=1, 35°C	100x10 <sup>3</sup>
RMB0	A (NO)	16A, 400VAC same polarity, cosφ=1, 50°C	100x10 <sup>3</sup>
<b>UL 508</b>			
RM5	A (NO)	16A, 415VAC, resistive, 50°C	100x10 <sup>3</sup>
RM5	A (NO)	16A, 277VAC, general purpose, 50°C	30x10 <sup>3</sup>
RM6	A (NO)	10A, 415VAC, resistive, DC-coil, 70°C	100x10 <sup>3</sup>
RM6	A (NO)	10A, 415VAC, resistive, AC-coil, 50°C	100x10 <sup>3</sup>
RM6	A (NO)	10A, 277VAC, gen. purp., DC-coil, 70°C	30x10 <sup>3</sup>
RM6	A (NO)	10A, 277VAC, gen. purp., AC-coil, 50°C	30x10 <sup>3</sup>
RMB	A (NO)	16A, 277VAC, general purpose, 25°C	30x10 <sup>3</sup>
Mechanical endurance			
DC coil		20x10 <sup>6</sup> operations	
AC coil		20x10 <sup>6</sup> operations	

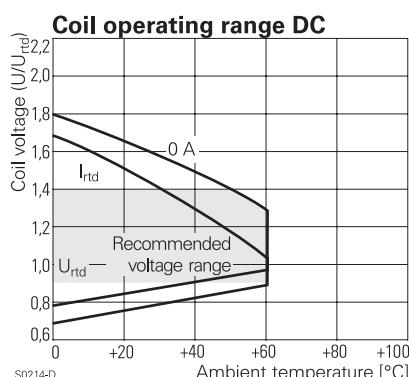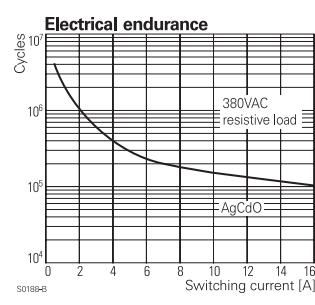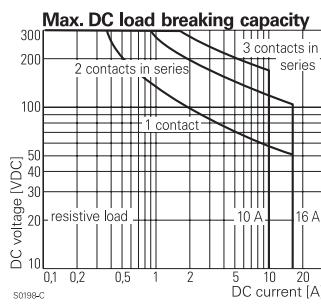

**Power Relay RM 5/6/B 3mm (Continued)**
**Coil Data (continued)**
**Coil versions, AC coil**


Coil code	Rated voltage	Operate voltage 50/60Hz	Release voltage 50/60Hz	Coil resistance $\Omega \pm 10\%$ <sup>1)</sup>	Rated coil power 50/60Hz
STD	LED	VAC	VAC		

**Coil versions, AC-coil, RM5, RM6**

506	R06	6	4.8/5.1	1.8	4.7	2.86/2.36
512	R12	12	9.6/10.2	3.6	19.5	2.71/2.27
524	R24	24	19.2/20.4	7.2	80	2.62/2.00
548	R48	48	38.4/40.8	14.4	320	2.60/2.17
560	R60	60	48.0/51.0	18.0	500	2.62/2.20
615	S15	115	92.0/97.8	34.5	1850	2.65/2.22
730	T30	230	184.0/195.5	69.0	7500	2.69/2.26
900	V00	400	320.0/340.0	120.0	23500 <sup>1)</sup>	2.61/2.20

1) Coil resistance  $\pm 15\%$ .

All figures are given for coil without pre-energization, at ambient temperature +23°C.

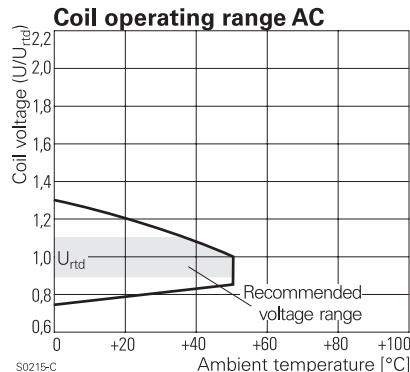
**Accessories**


For details see datasheet

**Accessories Power Relay RM**


Note: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

**PCB layout / terminal assignment**


Bottom view on pins

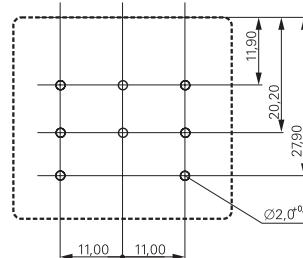

3 form A (3 NO) contacts



2 form A (2 NO) contacts




Insulation Data	RM5	RM6	RMB
Initial dielectric strength			
between open contacts	2500Vrms	2500Vrms	2500Vrms
between contact and coil	2500Vrms	2500Vrms	2500Vrms
between adjacent contacts	2500Vrms	2500Vrms	2500Vrms
Initial surge withstand voltage	4000V	4000V	4000V
between contact and coil	5000V	4000V	4000V
between adjacent contacts, RM5	6000V	-	-
Clearance/creepage			
between contact and coil	$\geq 4.0/14.9\text{mm}$		
between adjacent contacts	$\geq 6.1/7.3\text{mm}$		
Material group of insulation parts		IIIa	



Other Data	RM5	RM6	RMB
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customersupport/rohssupportcenter">www.te.com/customersupport/rohssupportcenter</a>			
Ambient temperature for mounting/handling in operation		-20 to 40°C	
DC coil	-40 to 50°C	-40 to 60°C	-40 to 50°C
AC coil	-40 to 50°C	-40 to 50°C	-
Category of environmental protection		RTI - dust protected	
IEC 61810		12 g, 30 to 150 Hz	
Vibration resistance (functional)		PCB-THT, plug-in, quick-connect (QC)	
Terminal type		100/100N	
Cover retention, pull/push force		versions with test button not to be mounted with button on top	
Mounting position			
Weight		81g	
Resistance to soldering heat THT		270°C/10s	
IEC 60068-2-20			
Packaging unit		10/25 pcs.	

**Power Relay RM 5/6/B 3mm (Continued)**
**Dimensions**





Plain cover, plug-in version

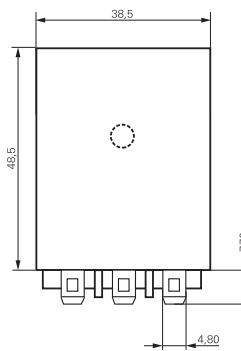

PCB version

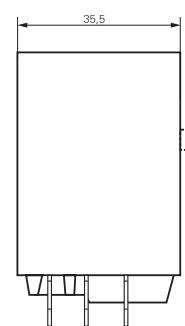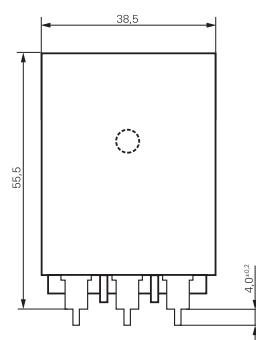

Cover with mounting brackets, 6.3mm quick connect (4.8mm available)

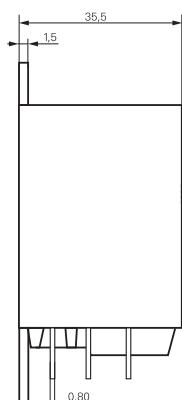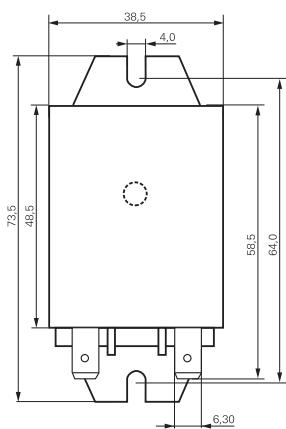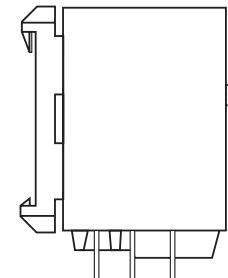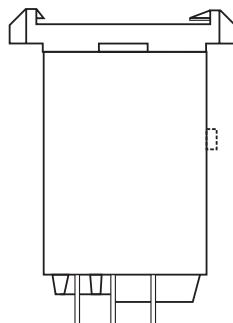
 Cover with DIN-snap-on attachment (6.3mm quick connect only)  
horizontal

**Product code structure**

 Typical product code **RM** **5** **0** **2** **524**
**Type**
**RM** Power relay RM5/6/B 3mm

**Contact arrangement**
**5** 2 form A contacts (2 NO), 16A

**6** 3 form A contacts (3 NO), 10A

**B** 3 form A contacts (3 NO), 16A

**Version**
**0** AgCdO, without test button, without mechanical indicator

**2** AgNi90/10, without test button, without mechanical indicator

**3** AgCdO, with test button, without mechanical indicator

**7** AgNi90/10, with test button, without mechanical indicator

**Enclosure**
**2** Plain cover, 4.8mm quick connect terminals

**3** Cover with mounting brackets, 4.8mm quick connect terminals

**5** Cover with mounting brackets, 6.3mm quick connect terminals

**7** PCB version

**8** Cover with DIN-snap-on attachment, horizontal, 6.3mm quick connect terminals

**9** Cover with DIN-snap-on attachment, vertical, 6.3mm quick connect terminals

**Coil**

Coil code: please refer to coil versions table

## Power Relay RM 5/6/B 3mm (Continued)

Product key	Contacts	Cont. material	Version	Enclosure	Coil	Coil	Part number
RM502024	2 form A,	AgCdO	Without	Plain cover	DC coil	24VDC	6-1393146-1
RM522012	2 NO contacts	AgNi	test button	QC 4.8mm		12VDC	2-1415546-4
RM502524	16A	AgCdO	without		AC coil	24VAC	6-1393146-2
RM502615		AgCdO	mech. indicator			115VAC	6-1393146-3
RM502730		AgCdO				230VAC	6-1393146-4
RM503024		AgCdO		Mounting brackets	DC coil	24VDC	8-1393148-0
RM503615		AgCdO	quick c. 4.8mm		AC coil	115VAC	6-1393146-5
RM505024		AgCdO		Mounting brackets	DC coil	24VDC	8-1393148-3
RM525012		AgNi	QC 6.3mm		DC coil	12VDC	5-1415544-6
RM505615		AgCdO			AC coil	115VAC	6-1393146-6
RM505730		AgCdO				230VAC	9-1393149-9
RM525730		AgNi				230VAC	2-1415546-5
RM507024		AgCdO		PCB version	DC coil	24VDC	1393844-1
RM527024		AgNi				24VDC	2-1415546-6
RM507524		AgCdO			AC coil	24VAC	5-1415008-1
RM507615		AgCdO				115VAC	6-1415015-1
RM507730		AgCdO				230VAC	1415008-1
RM528730		AgNi		DIN-snap-on horizontal		230VAC	2-1415546-7
RM535024		AgCdO	With test button	Mounting brackets	DC coil	24VDC	7-1393146-2
RM535524		AgCdO	w/o mech.indicator	QC 6.3mm	AC coil	24VAC	9-1393148-0
RM602024	3 form A,	AgCdO	Without	Plain cover	DC coil	24VDC	1393844-4
RM622024	3 NO contacts	AgNi	test button	QC 4.8mm		24VDC	2-1415546-8
RM602615	10A	AgCdO	without		AC coil	115VAC	9-1393148-7
RM605730		AgCdO	mech. indicator	Mount.br. q.c.6.3		230VAC	7-1393146-6
RM607024		AgCdO			PCB version	24VDC	1393844-6
RM627012		AgNi				12VDC	2-1415546-9
RM627730		AgNi				230VAC	3-1415546-0
RM607524		AgCdO			AC coil	24VAC	7-1393146-8
RM607615		AgCdO				115VAC	8-1415015-1
RM607730		AgCdO				230VAC	7-1393146-9
RM632024		AgCdO	With	Plain cover	DC coil	24VDC	8-1393146-0
RM632730		AgCdO	test button	QC 4.8mm	AC coil	230VAC	1393149-7
RM635024		AgCdO	without	Mount.br.QC 6.3	DC coil	24VDC	7-1393107-7
RM637024		AgCdO	mech. indicator		PCB version	24VDC	1393149-9
RMB07012	3 A (NO) cont. 16A	AgCdO	W/o test, indicator			12VDC	1-1415545-6
RMB07024		AgCdO				24VDC	2-1415543-7

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-1393146-0](#)