

AEE Series

15 Watts

Data Sheet

Total Power: 15 Watts
Input Voltage: 12 V, 24 V or 48 V
of Outputs: Single, Dual

SPECIAL FEATURES

- Encapsulated
- 4:1 input range
- 1" x 2" package
- 1500 Vdc I/O isolation
- Single and Dual output

SAFETY

- UL 60950-1
- CE Mark



Electrical Specifications

Input	
Input range:	9 to 36 VDC; 18 to 75 VDC
Efficiency ² :	84% @ 12 Vo
Output	
Voltage tolerance:	±2.0%
Line regulation:	±0.5%
Load regulation:	Single output: ±1.0% Dual output: ±TBD%
Noise/ripple:	3.3 Vo: 100 mV 5.0 Vo: 100 mV 12 Vo: 120 mV 15 Vo: 120 mV
Short circuit protection:	Auto-restart
Switching frequency:	300 KHz
Temperature coefficient:	±0.02 /°C
Isolation	
I/O isolation:	1500 VDC min.
Insulation resistance:	10 Mohm
Insulation capacitance:	1000 pF typical

Environmental Specifications

Operating ambient temperature range:	-40°C to +71°C (no derating)
Storage temperature:	-55 °C to +105 °C
Humidity:	5% to 95% (non-condensing)
MTBF:	>1 Million hours
RoHS Compliant	RoHS-6


Ordering Information

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
AEE04F18-LS	9 - 36 V	3.3 V @ 4 A		13.2 W
AEE03A18-LS	9 - 36 V	5 V @ 3 A		15 W
AEE01B18-LS	9 - 36 V	12 V @ 1.25 A		15 W
AEE01C18-LS	9 - 36 V	15 V @ 1 A		15 W
AEE01AA18-LS	9 - 36 V	5 V @ 1.5 A	-5 V @ 1.5 A	15 W
AEE00BB18-LS	9 - 36 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE00CC18-LS	9 - 36 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W
AEE04F36-LS	18 - 75 V	3.3 V @ 4 A		13.2 W
AEE03A36-LS	18 - 75 V	5 V @ 3 A		15 W
AEE01B36-LS	18 - 75 V	12 V @ 1.25 A		15 W
AEE01C36-LS	18 - 75 V	15 V @ 1 A		15 W
AEE01AA36-LS	18 - 75 V	5 V @ 1.5 A	-5 V @ 1.5 A	15 W
AEE00BB36-LS	18 - 75 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE00CC36-LS	18 - 75 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W

Please contact Artesyn Embedded Technologies for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.


Mechanical Drawings

Single Output

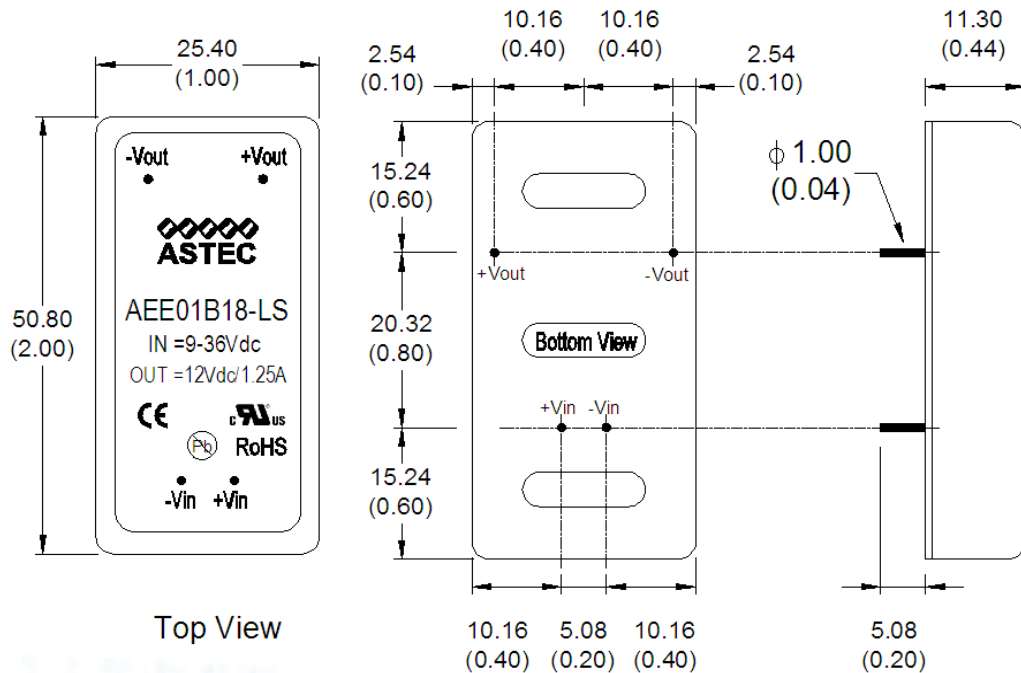

Mechanical Drawings

Dual Output

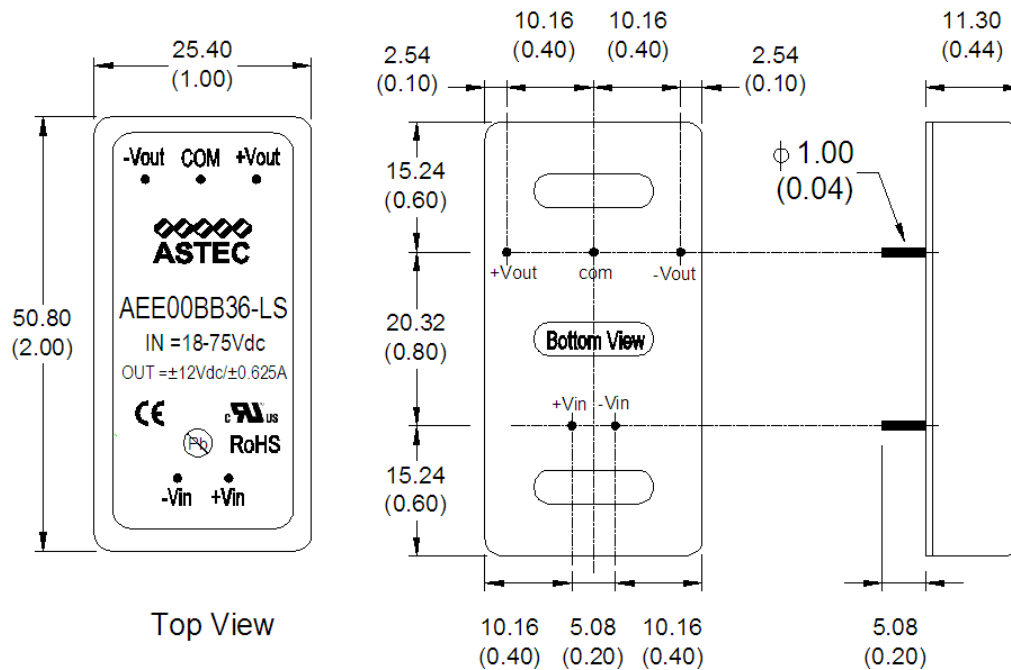

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 1 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYNTM
 EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Artesyn Embedded Technologies:

[AEE01AA18-LS](#) [AEE03A36-LS](#) [AEE03A18-LS](#) [AEE00BB18-LS](#) [AEE04F36-LS](#) [AEE01C36-LS](#) [AEE00CC18-LS](#)
[AEE01B18-LS](#) [AEE04F18-LS](#) [AEE01C18-LS](#) [AEE00BB36-LS](#) [AEE00CC36-LS](#) [AEE01B36-LS](#) [AEE01AA36-LS](#)