



MOUNTING CONFIGURATIONS

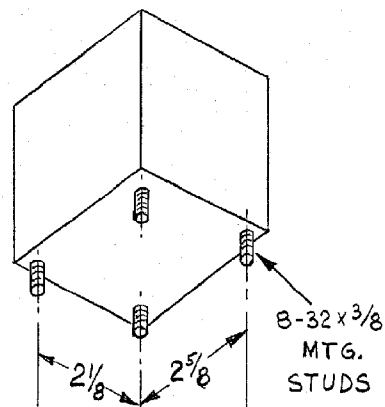

STUD MOUNTING
MODEL 710
MODELS 720 THRU 724

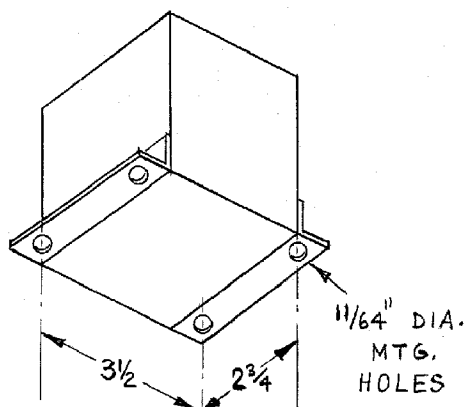


BRACKET MOUNTING (SUFFIX "X")
MODEL 710X
MODELS 720X THRU 724X

CONNECTIONS


A. MODEL 710 (OR MODEL 710X)

THIS MODEL IS DESIGNED FOR 120V, 220V OR 266V LINE TO NEUTRAL CONNECTION.

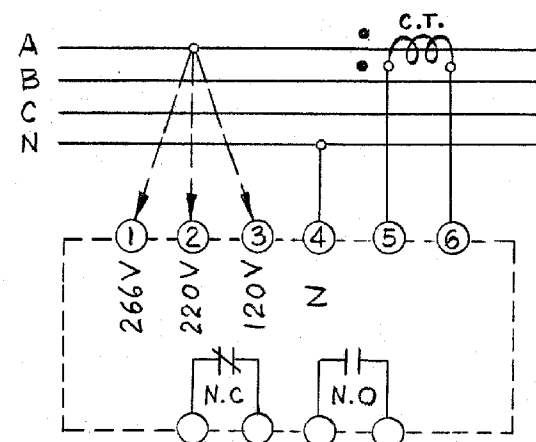

B. MODELS 720(X) THRU 724 (X)

FOR USE WITH THREE PHASE THREE WIRE SYSTEMS.

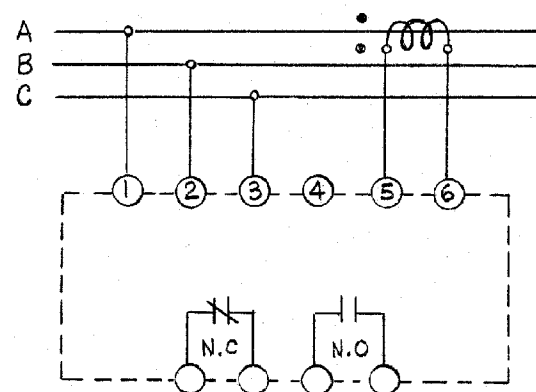

MODEL	INPUT VOLTAGE, 3 ϕ
720 (X)	120 VOLTS, L-L
721 (X)	230 VOLTS, L-L
722 (X)	380 VOLTS, L-L
723 (X)	460 VOLTS, L-L
724 (X)	575 VOLTS, L-L

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES ± 1/32 ± .010 ± 1/2° BREAK ALL SHARP EDGES .015 MAX. AND DEBURR MATERIAL:
NEXT ASSY	USED ON	
APPLICATION		

REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
		APPROVED	

SPECIFICATIONS

LINE VOLTAGE:

A. THE MODEL 710 (X) IS DESIGNED FOR 120V, 220V OR 266V LINE TO NEUTRAL SENSING.

B. THE TABLE BELOW PROVIDES A LIST OF AVAILABLE MODELS FOR THREE PHASE SENSING.

LINE FREQUENCY: 50 - 500 HZ.

CURRENT REQUIREMENTS: 0 TO 5 AMP. MAX., DIRECT OR FROM C.T.

OPERATION: THE SELF CONTAINED OUTPUT RELAY ACTUATES WHEN REVERSE POWER FLOW EXCEEDS THE PRE-SET VALUE.

TRIP ADJUSTMENT: SCREWDRIVER ADJUSTABLE 4% TO 20% (OF THE 5 AMP. RESISTIVE RATING).

OUTPUT CONTACTS: ONE SET N.C., ONE SET N.O.


CONTACT RATING: 5 AMP RESISTIVE AT 120VAC OR 28VDC. POWER CONSUMPTION:

VOLTAGE CIRCUIT: 2VA MAX.

CURRENT CIRCUIT: 4VA MAX.

CONSTRUCTION: SOLID STATE SENSOR WITH RELAY OUTPUT ENCLOSED IN A SEALED STEEL CAN.

NOTE: CLOCKWISE ROTATION OF THE PICK-UP ADJUSTMENT WILL RAISE THE REVERSE POWER TRIP POINT. REMOVE SCREW FOR ACCESS TO THE PICK-UP ADJUSTMENT.

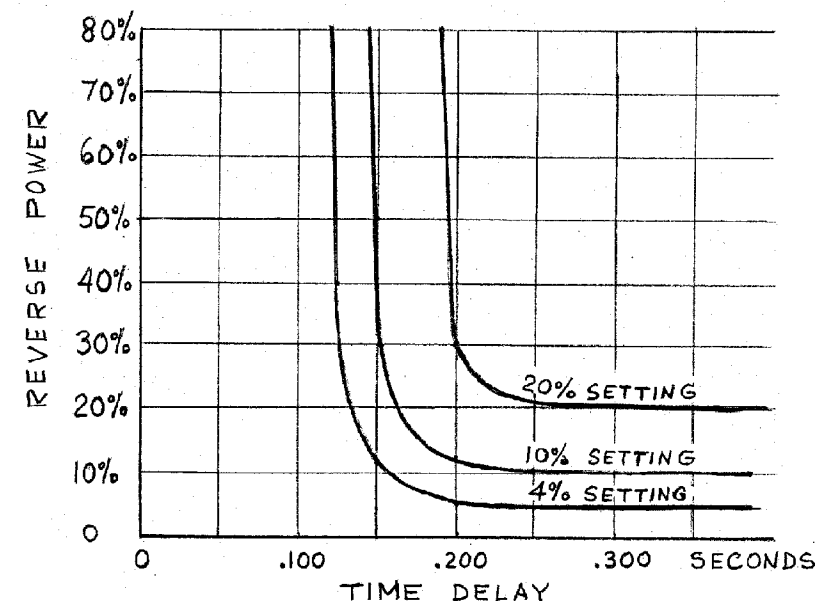

QTY REQD	SYM	DESCRIPTION	CODE IDENT NO.	PART NO.	SPEC	MATERIAL OR NOTE	ITEM NO.
LIST OF MATERIAL							
CONTRACT NO.		WILMAR WE ELECTRONICS, INC. TORRANCE, CALIFORNIA					
DRAWN		E.R.H.	10-20-76	TITLE REVERSE POWER RELAY 710 AND 720 SERIES			
CHECKED		J.C.H.	10/20/76				
DESIGN APPROVAL							
PROJECT APPROVAL			10-21-76				
DESIGN ACTIVITY APPROVAL				SIZE	CODE IDENT NO.	DWG NO.	
APPROVAL				C	25248	21-313	
				SCALE	WEIGHT	SHEET	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[724X](#)