

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- - -

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

ES

00

P

LTR

DESCRIPTION

DATE

DWN

APVD

A2


ECR-14-005789

19MAR14



T.Q

W.H


D




2 POSITION

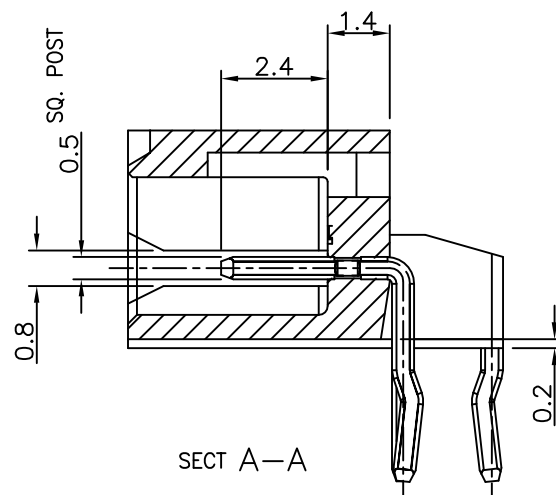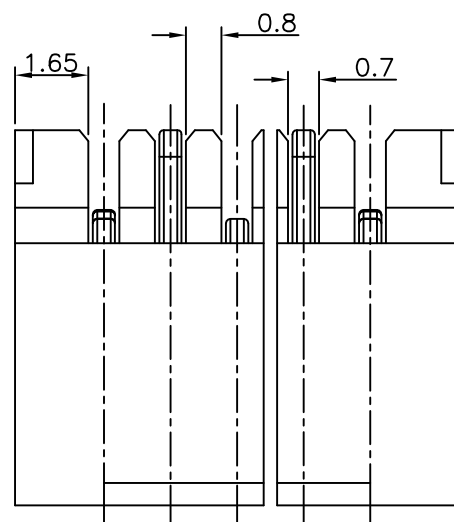


SECT A-A

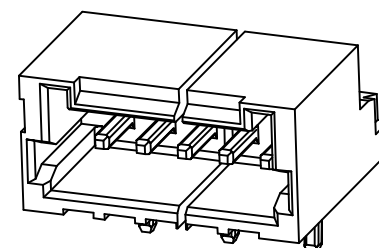


TRADE MARK

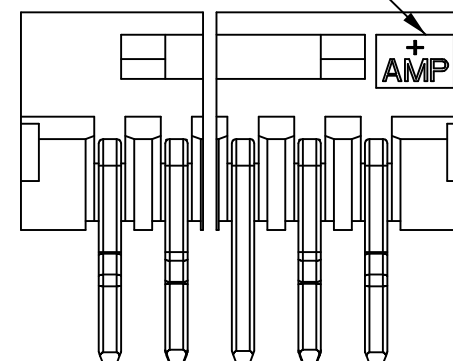

VIEW B





GATING RECESS

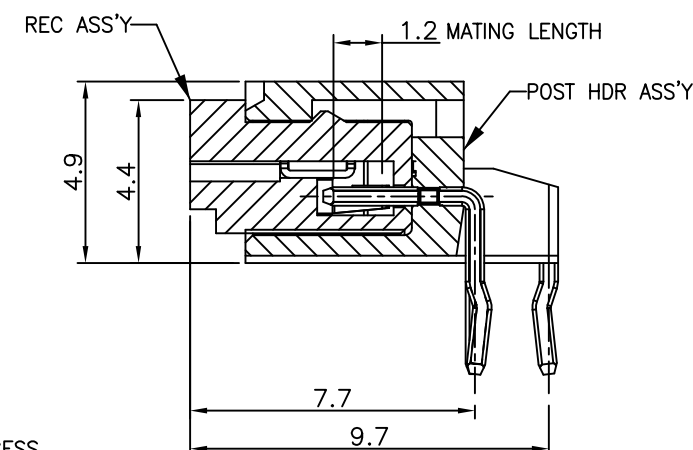


MATING SECTION

C

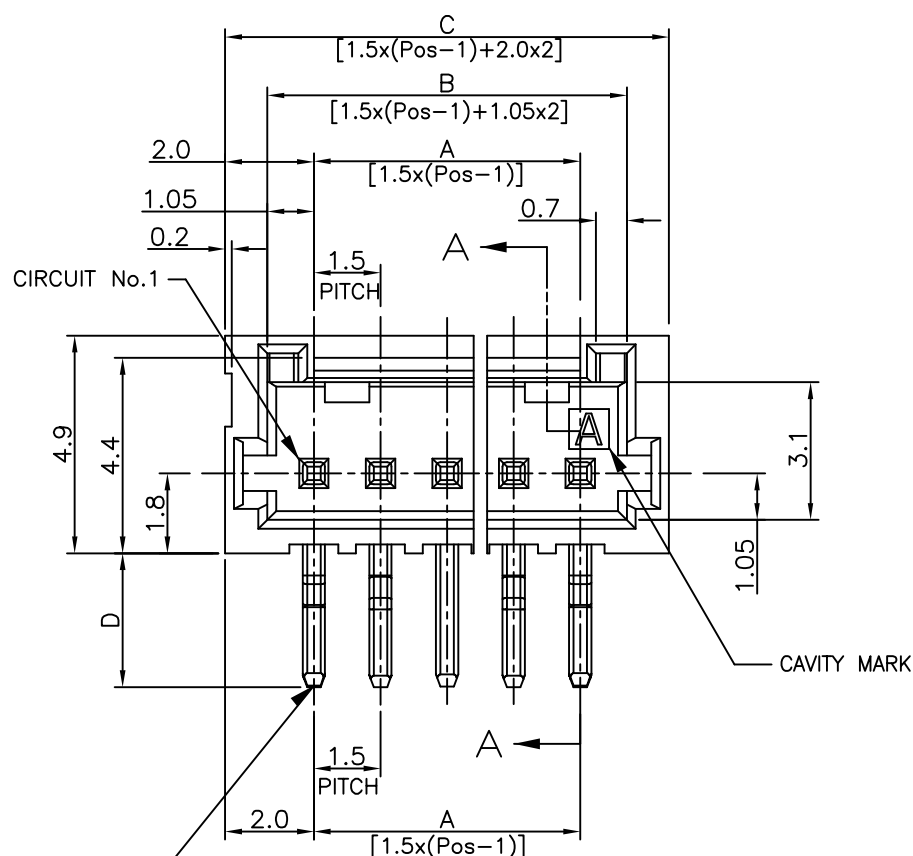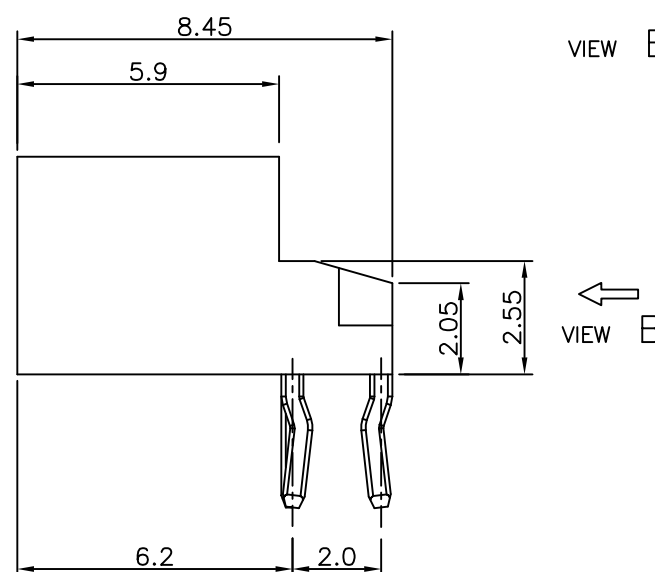KINKING FORMING
BOTH SIDE EACH 2 PLACES
TOTAL: 4 PLACES

VIEW B

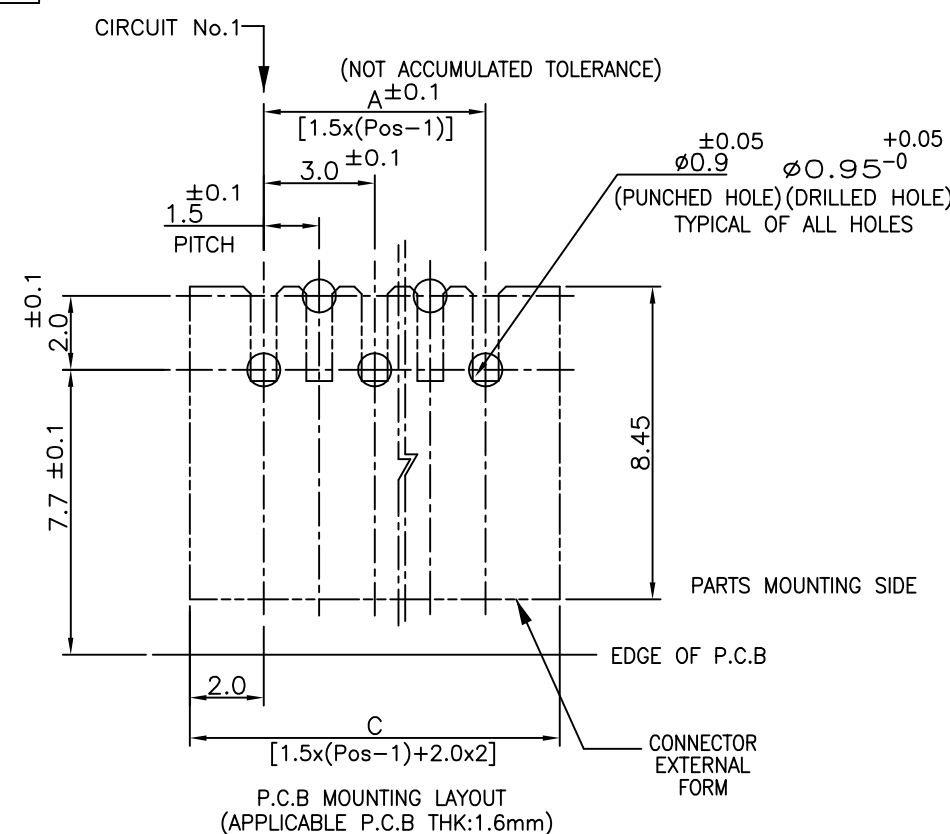

NOTES:


1.MATERIAL:

HOUSING:NYLON(G.F.) UL94V-0,COLOR:GRAY,BLUE
POST:PRE-TIN 0.5mm SQ. BRASS WIRETOLERANCES UNLESS
OTHERWISE SPECIFIED:10 > * : ±0.2
30 > * >10 : ±0.25
100 > * >30 : ±0.3
ANGLE : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM



MATERIAL

SEE NOTE 1

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH

SEE NOTE 1

DWN S.YAO 06DEC02

CHK T.SASAKI 31JAN03

APVD T. SASAKI 31JAN03

PRODUCT SPEC

108-60018

APPLICATION SPEC

114-5223

WEIGHT SEE TABLE

CUSTOMER DRAWING



TE Connectivity

NAME AMP Mini CT Connector 1.5mm Pitch

Single Row HDR Ass'y (H) DIP Staggered Type with Kink

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3 00779

C=292206

SCALE NON

SHEET 1 of 2

REV A2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

0.28	2.5	8.5	6.6	4.5	4		9-292206-4
0.23	2.5	7.0	5.1	3.0	3		9-292206-3
1.11	3.0	32.5	30.6	28.5	20	7-292206-0	2-292206-0
1.06	3.0	31.0	29.1	27.0	19	6-292206-9	1-292206-9
1.01	3.0	29.5	27.6	25.5	18	6-292206-8	1-292206-8
0.96	3.0	28.0	26.1	24.0	17	6-292206-7	1-292206-7
0.91	3.0	26.5	24.6	22.5	16	6-292206-6	1-292206-6
0.86	3.0	25.0	23.1	21.0	15	6-292206-5	1-292206-5
0.81	3.0	23.5	21.6	19.5	14	6-292206-4	1-292206-4
0.75	3.0	22.0	20.1	18.0	13	6-292206-3	1-292206-3
0.70	3.0	20.5	18.6	16.5	12	6-292206-2	1-292206-2
0.65	3.0	19.0	17.1	15.0	11	6-292206-1	1-292206-1
0.60	3.0	17.5	15.6	13.5	10	6-292206-0	1-292206-0
0.54	3.0	16.0	14.1	12.0	9	5-292206-9	292206-9
0.49	3.0	14.5	12.6	10.5	8	5-292206-8	292206-8
0.44	3.0	13.0	11.1	9.0	7	5-292206-7	292206-7
0.40	3.0	11.5	9.6	7.5	6	5-292206-6	292206-6
0.34	3.0	10.0	8.1	6.0	5	5-292206-5	292206-5
0.29	3.0	8.5	6.6	4.5	4	5-292206-4	292206-4
0.24	3.0	7.0	5.1	3.0	3	5-292206-3	292206-3
0.19	3.0	5.5	3.6	1.5	2	5-292206-2	292206-2
WEIGHT (g)	D	C	B	A	Pos.	BLUE	GRAY
	DIMENSIONS					PART NO	

DIMENSIONS: mm		DWN —	MATERIAL —	FINISH —		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± SEE SHEET 2 PLC ± 1 OF 2 3 PLC ± — 4 PLC ± — ANGLES ± —		CHK —	TE Connectivity			
		APVD —				
		PRODUCT SPEC —	NAME AMP Mini CT Connector 1.5mm Pitch Single Row Post HDR Ass'y (H) DIP Staggered Type with Kink			
		APPLICATION SPEC —				
		WEIGHT —	SIZE A4	CAGE CODE 00779	DRAWING NO C=292206	RESTRICTED TO —
		CUSTOMER DRAWING				SCALE —

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-292206-8](#)