




LOC				REVISONS			
G	14	P	P	ZONE	DESCRIPTION	DATE	APP
				E	REVISED PER 0720-0230-93	2/25/94	AMP

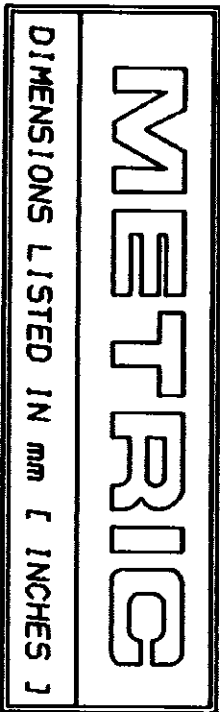

AMP WIRE RANGE		UL E13288 Listed	
22-16 AWG STRANDED		22-16 AWG STRANDED	
LR7189 Certified		MILITARY P/N AND CLASS	
NOT CERTIFIED		NOT APPLICABLE	

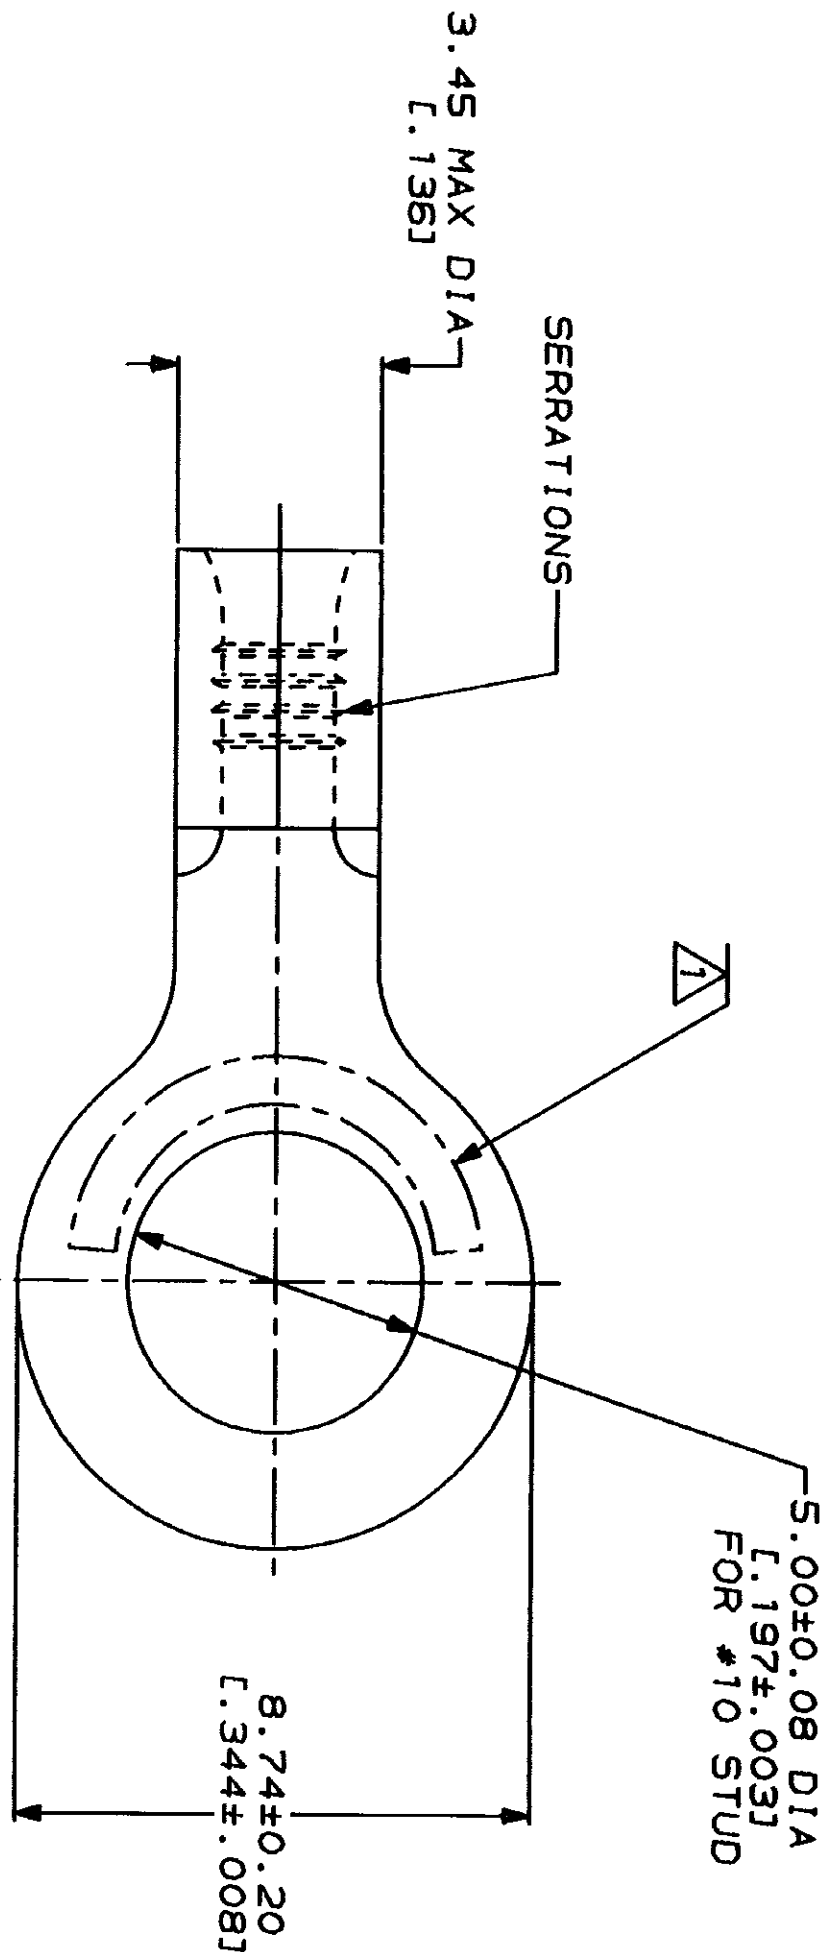

1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928; COMMERCIAL WIRE RANGE IS 22-16

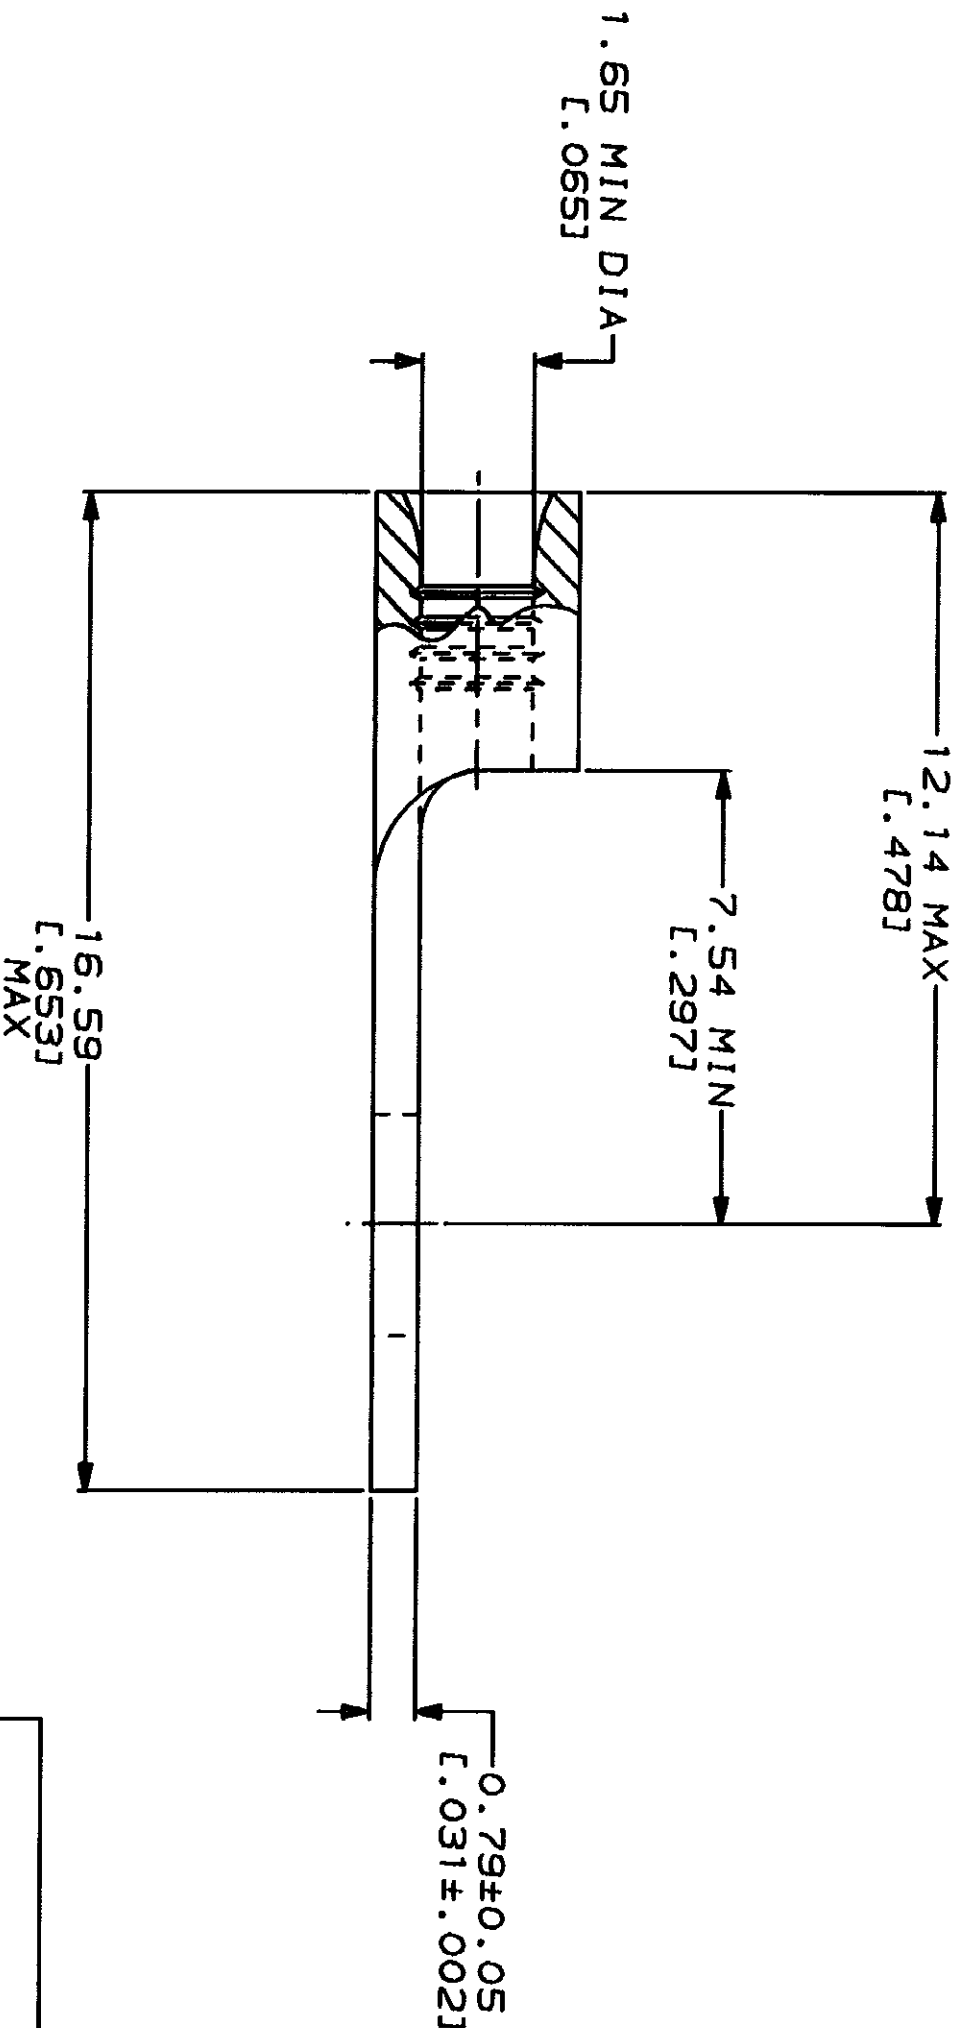

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	
FOR ORDER ENTRY	1-800-526-5142	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	MATERIAL COPPER PER ASTM B-152 ANNEALED
FINISH TIN PLATE 0.00254(.000100) MIN THK PER MIL-T-10727	

APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
-	8:1	00779	32824
WEIGHT	SCALE	SHEET	1 OF 1

32824

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[32824](#)