

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V3L-2170

CQ-X1434

CATALOG LISTING
V3L-2170
PAGE 1 OF 1

M

ISSUE
3

REPLACES

RELEASE NO. PR-4011

CHECK

CHECK

CHECK


DCS 15 MAR 96

REVISIONS

DCS	15 MAR 96
DCS	15 MAR 96

DDM/CAD

DRAWN

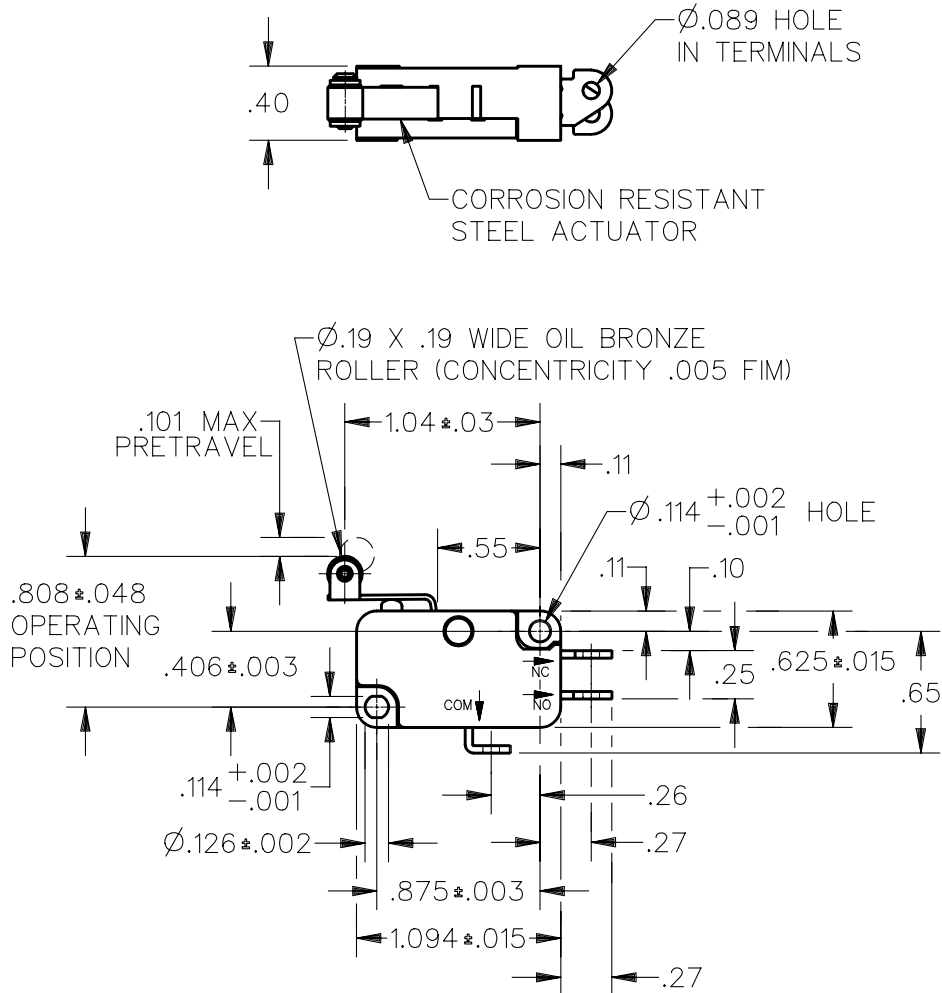


NOTE
1 - RESTRICTED LISTING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 45 GRAMS MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 4 GRAMS MIN	S P D T		
DIFFERENTIAL TRAVEL — — — .024 MAX	L131 10A 1/4HP 125 OR <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC 3A 125 VAC "L"	ONE PLACE (.0)	± .030
OVERTRAVEL — — — — — .058 MIN		TWO PLACE (.00)	± .015
RELEASE TRAVEL — — — — — .014 MIN		THREE PLACE (.000)	± .005
		ANGLES	±
	 	WEIGHT	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3L-2170](#)