
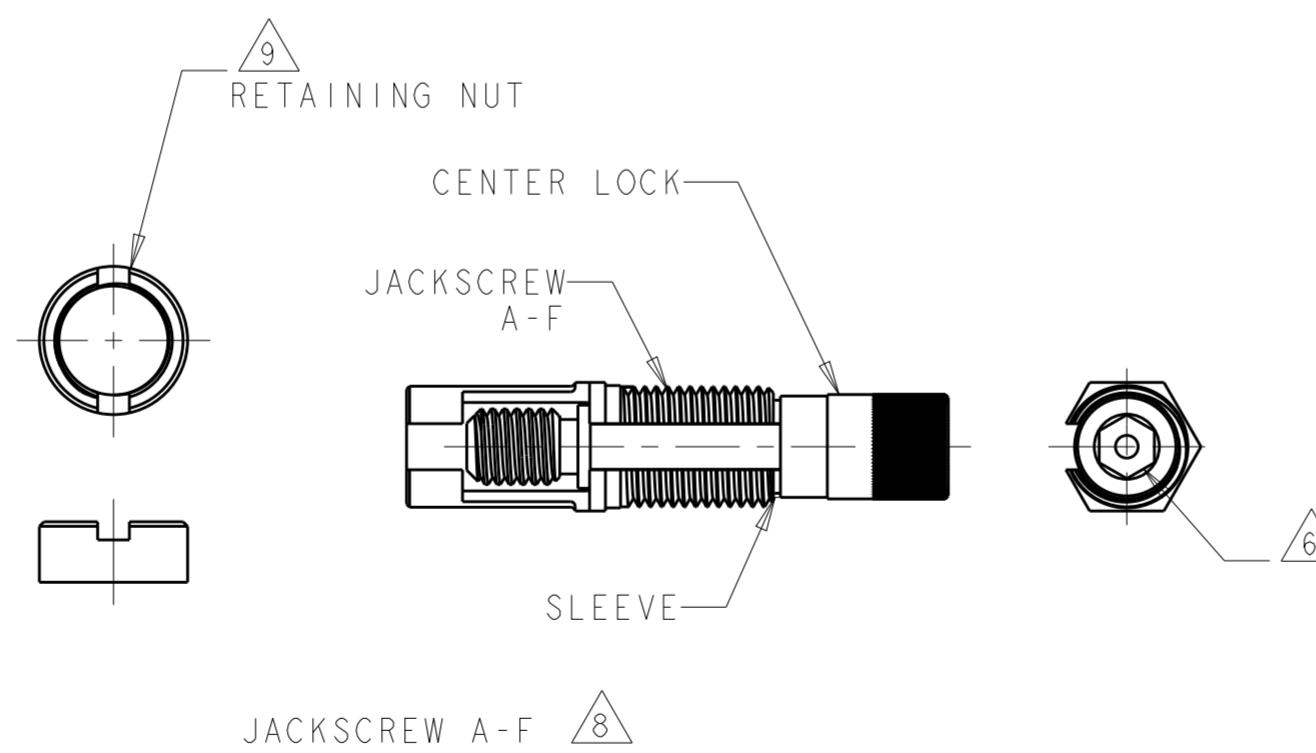
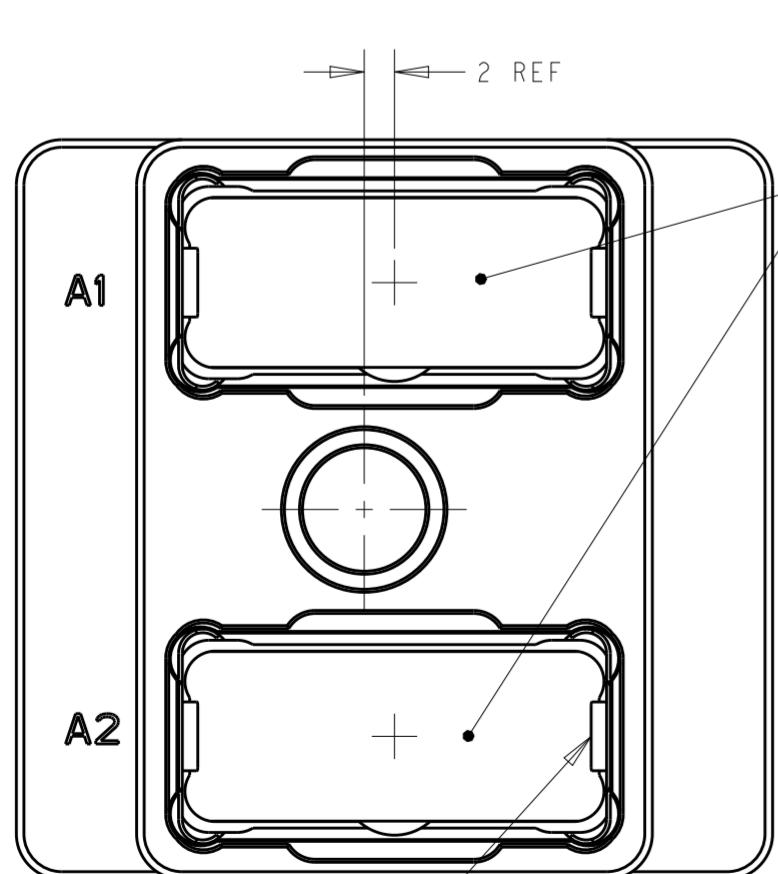
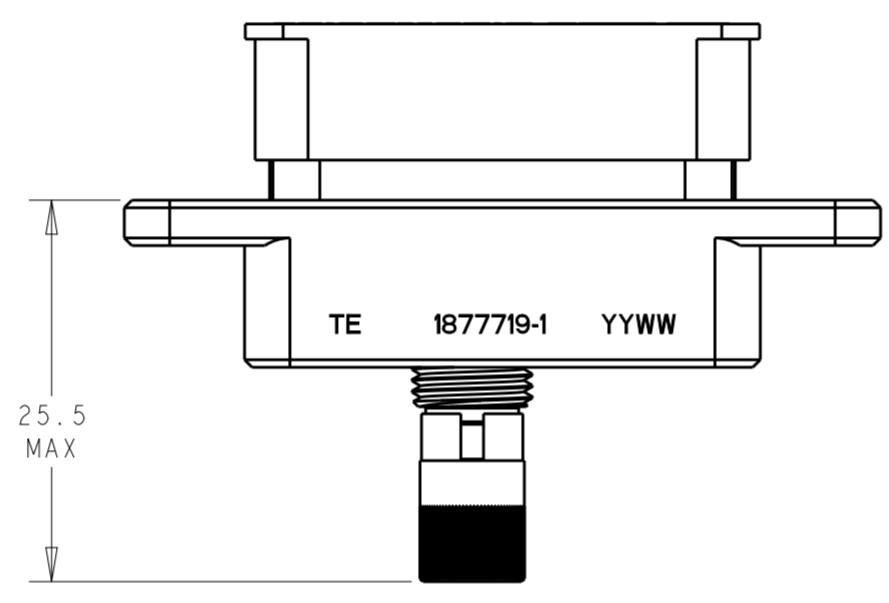
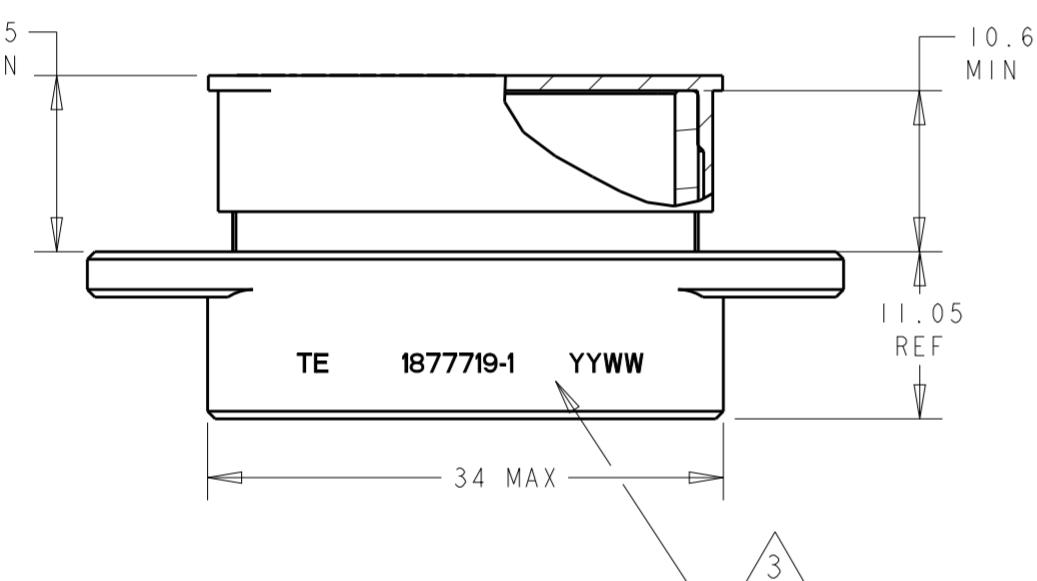
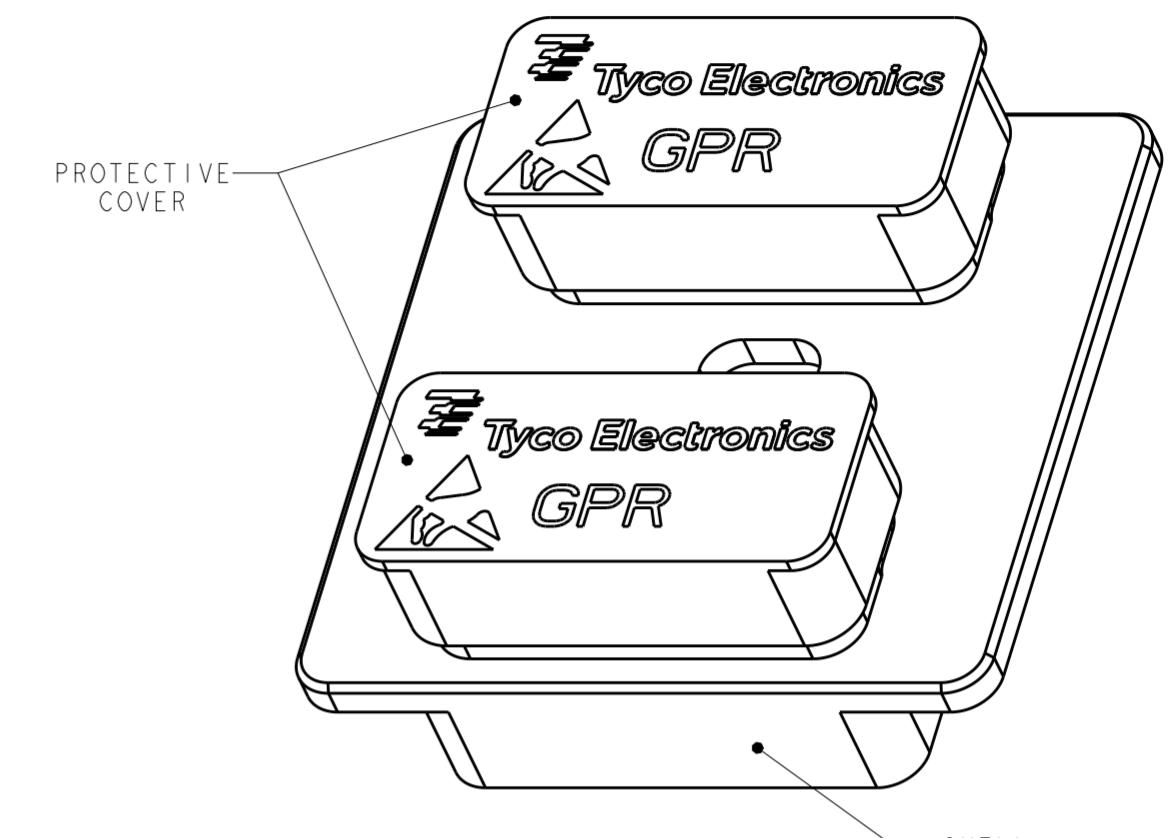
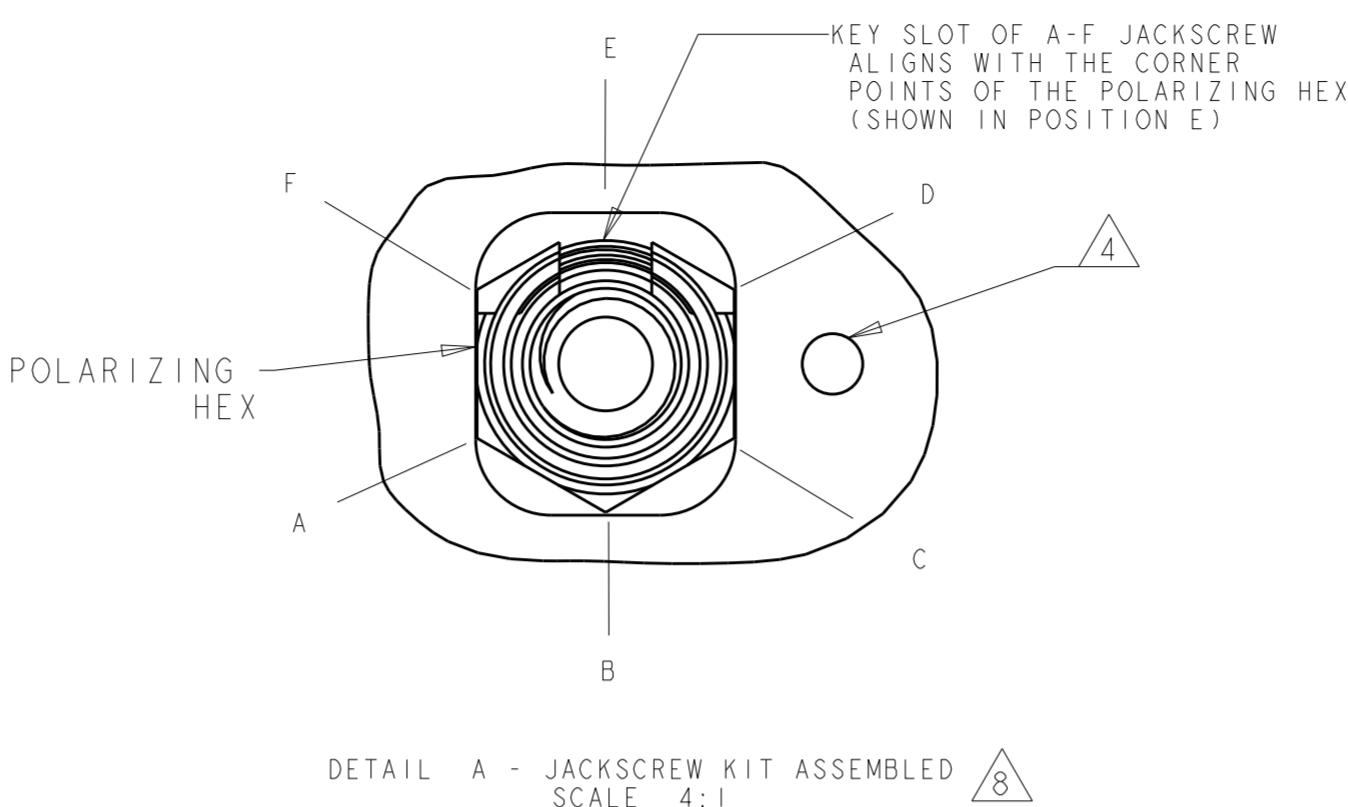


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION 20
ALL RIGHTS RESERVED.
© COPYRIGHT 20 BY -

REVISIONS			
P	LTR	DESCRIPTION	DATE
C		REV PER ECO 16-004978	25APR2016
			CT EO

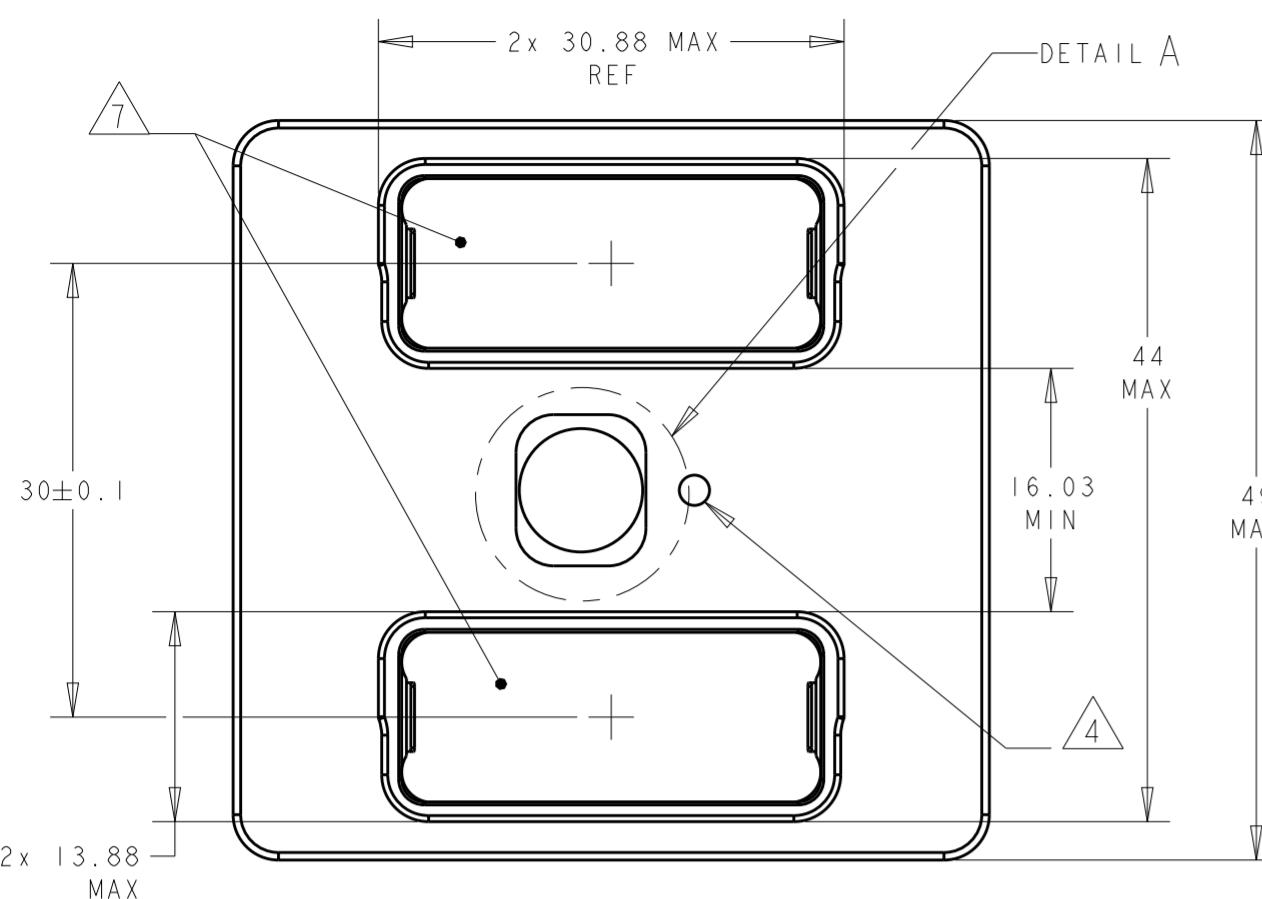

INSERT RETENTION CLIP

1 SHELL: ALUMINUM ALLOY 6061 T651
2 INSERT RETENTION CLIP & JACKSCREW SLEEVE: COPPER ALLOY PER ASTM B194
3 JACKSCREW KEY, CENTER LOCK, & RETAINING NUT: STAINLESS STEEL PER AISI 316
4 PROTECTIVE COVER: ANTI-STATIC THERMOPLASTIC ELASTOMER PER ASTM D5593,
COLOR: BLACK

5 SHELL: ELECTROLESS NICKEL PER SAE AMS-C-26074, CLASS I

6 TE, TE PART NO. AND DATE CODE - YEAR & WEEK (YY WW)

7 INDEXING POINT FOR POLARIZATION

8 SHELL CAVITIES FOR GPRB SERIES INSERTS WITH KEYING CODE A

9 HEX KEY SLOT FOR 9/64 ALLEN WRENCH

10 THE PROTECTIVE COVERS ARE NOT SHOWN FOR CLARITY.

11 THE JACKNUT AND RETAINING NUT ARE SHIPPED UNASSEMBLED. THE CUSTOMER SHALL
APPLY LOCTITE® PRODUCT 272 THREAD LOCKING ADHESIVE WHEN INSTALLING THESE
ON THE SHELL ASSEMBLY. LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.

12 A SPANNER WRENCH TOOL, TYCO ELECTRONICS P/N 1738220-1 (WITH 1/4-IN ADAPTER) OR
1738221-1 (WITH T-HANDLE), IS USED TO LOCK THE RETAINING NUT.
RECOMMENDED TORQUE: 1.5 N·m (13 in-lb).

13 THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER LICENSE FROM RADIALL SA.

1877719-1

PART
NUMBER

TE

TE Connectivity

PLUG SHELL KIT, VERTICAL,
WITH A-F JACKSCREW,
GPRB2

SIZE CAGE CODE DRAWING NO
A200779 C=1877719

RESTRICTED TO

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN BW	31JAN06
	CHK JPM	31JAN06
	APVD JPM	31JAN06
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	±0.2	
1 PLC	±0.2	
2 PLC	±0.2	
3 PLC	±-	
4 PLC	±-	
ANGLES	±-	
MATERIAL	FINISH	
material_2	finish_spec_2	
CUSTOMER DRAWING		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1877719-1](#)