
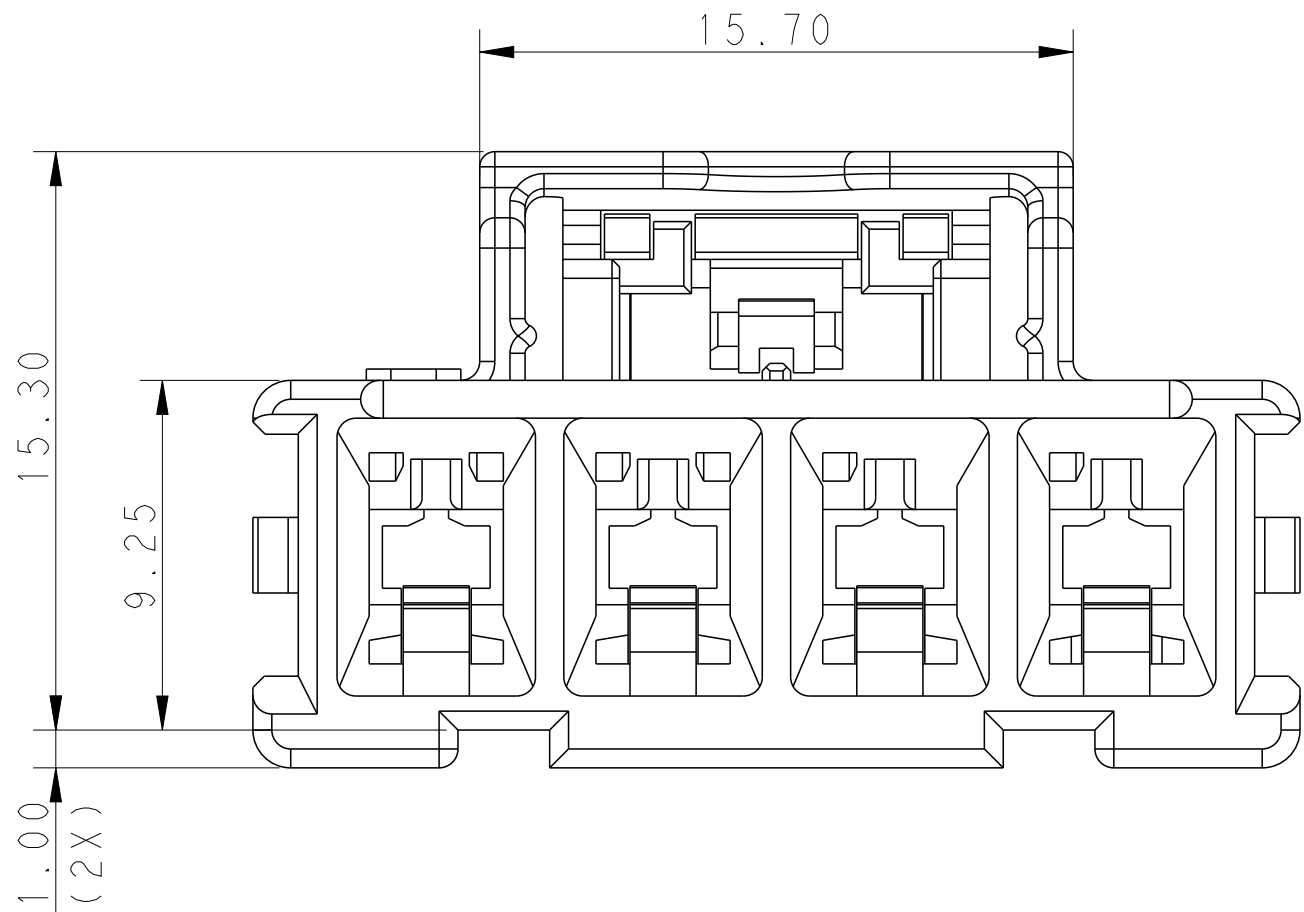
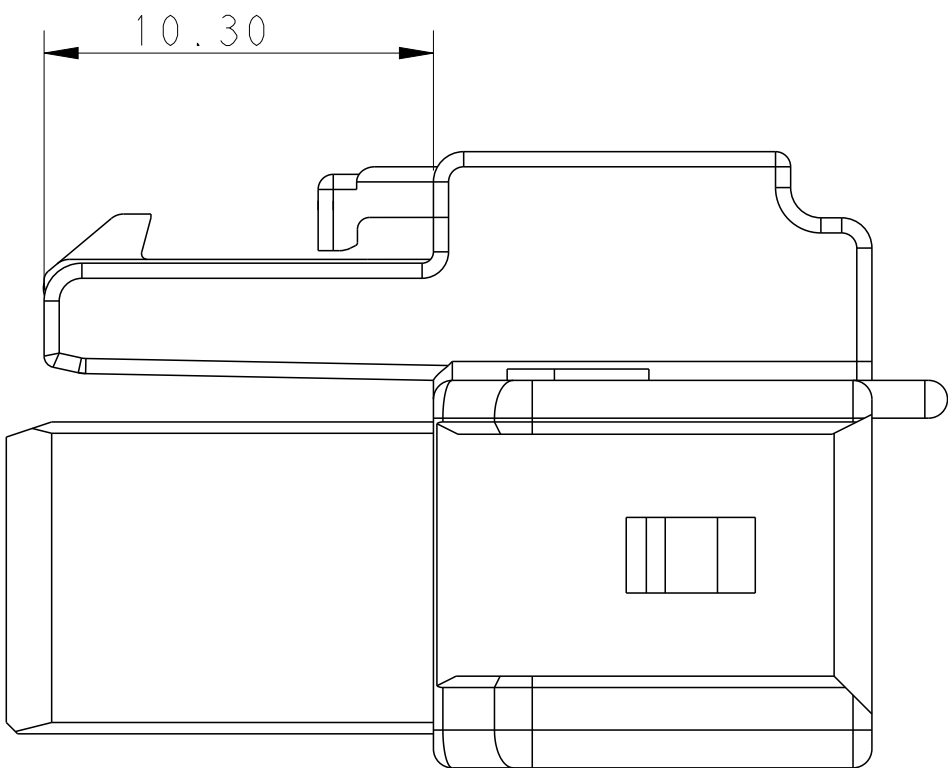
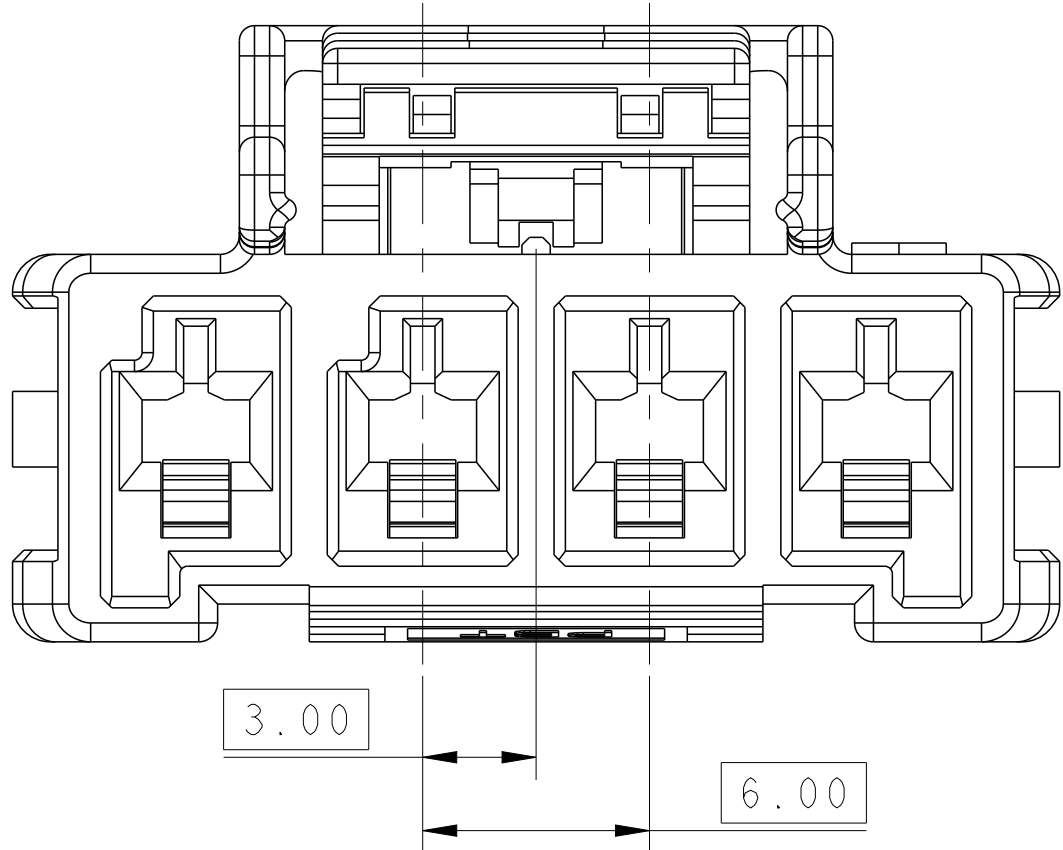


LOC		DIST	REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD
		C			03JUN2016	BW	GJ

POS.	DIM.A	DIM.B
1*5	33.70	28.00
1*4	27.70	22.00
1*3	21.70	16.00
1*2	15.70	10.00

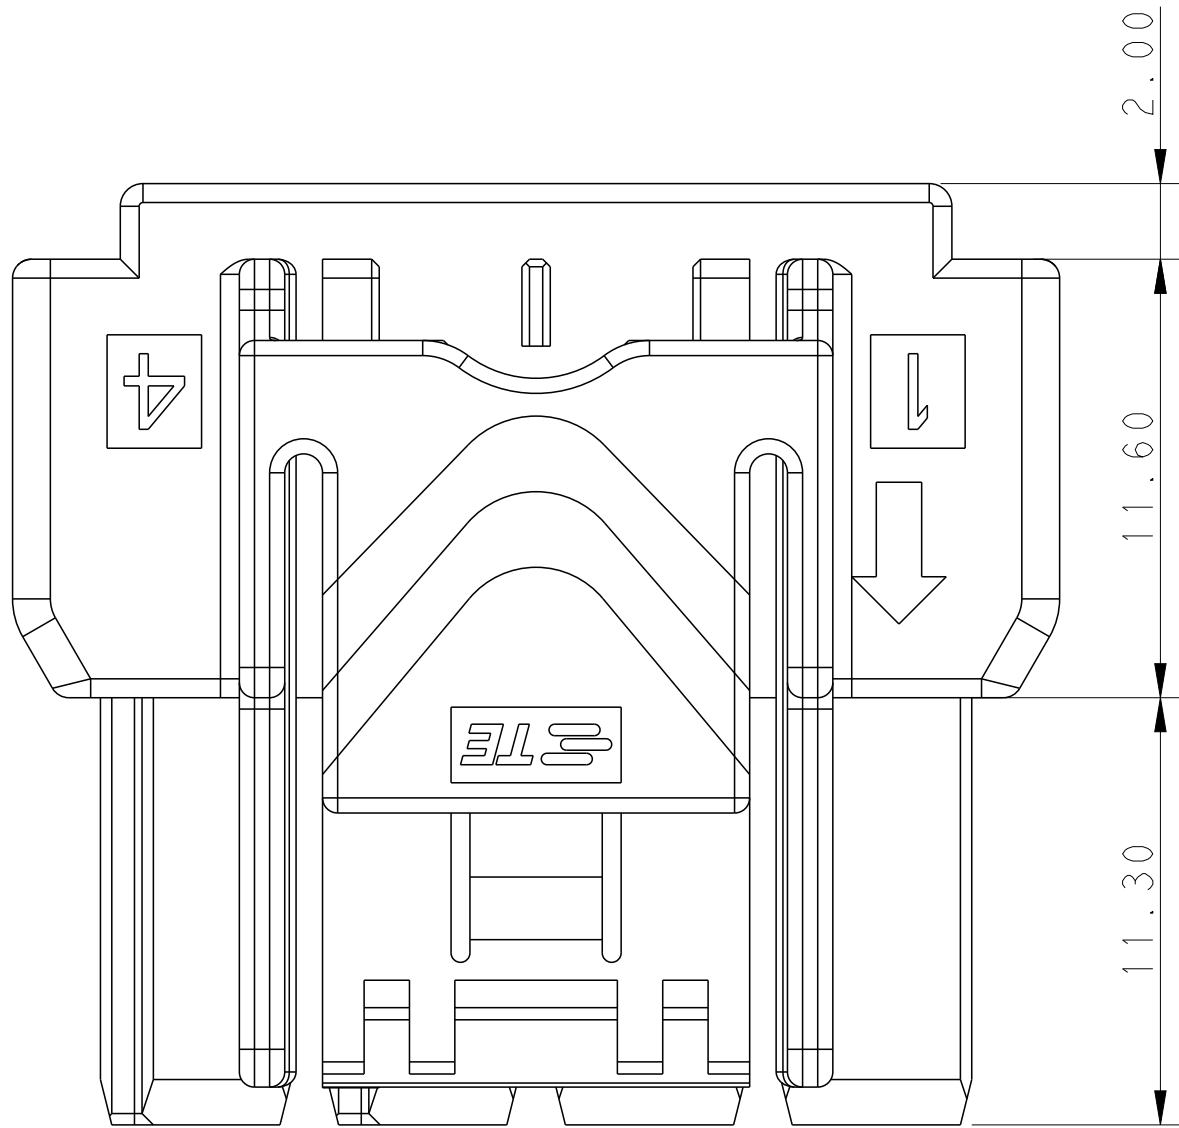


NOTE
1. MATERIAL:
LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0

2. MATERIAL MARK:
LEVEL A: GWT, LEVEL B: HWT









3. APPLICABLE CONTACT P/N
REC CONTACT: 1971237/1971779/81/83/85/87-*

4. MATING CONN. P/N
CAP HSG: *-2232358/263-
TPA: *-1971777-*

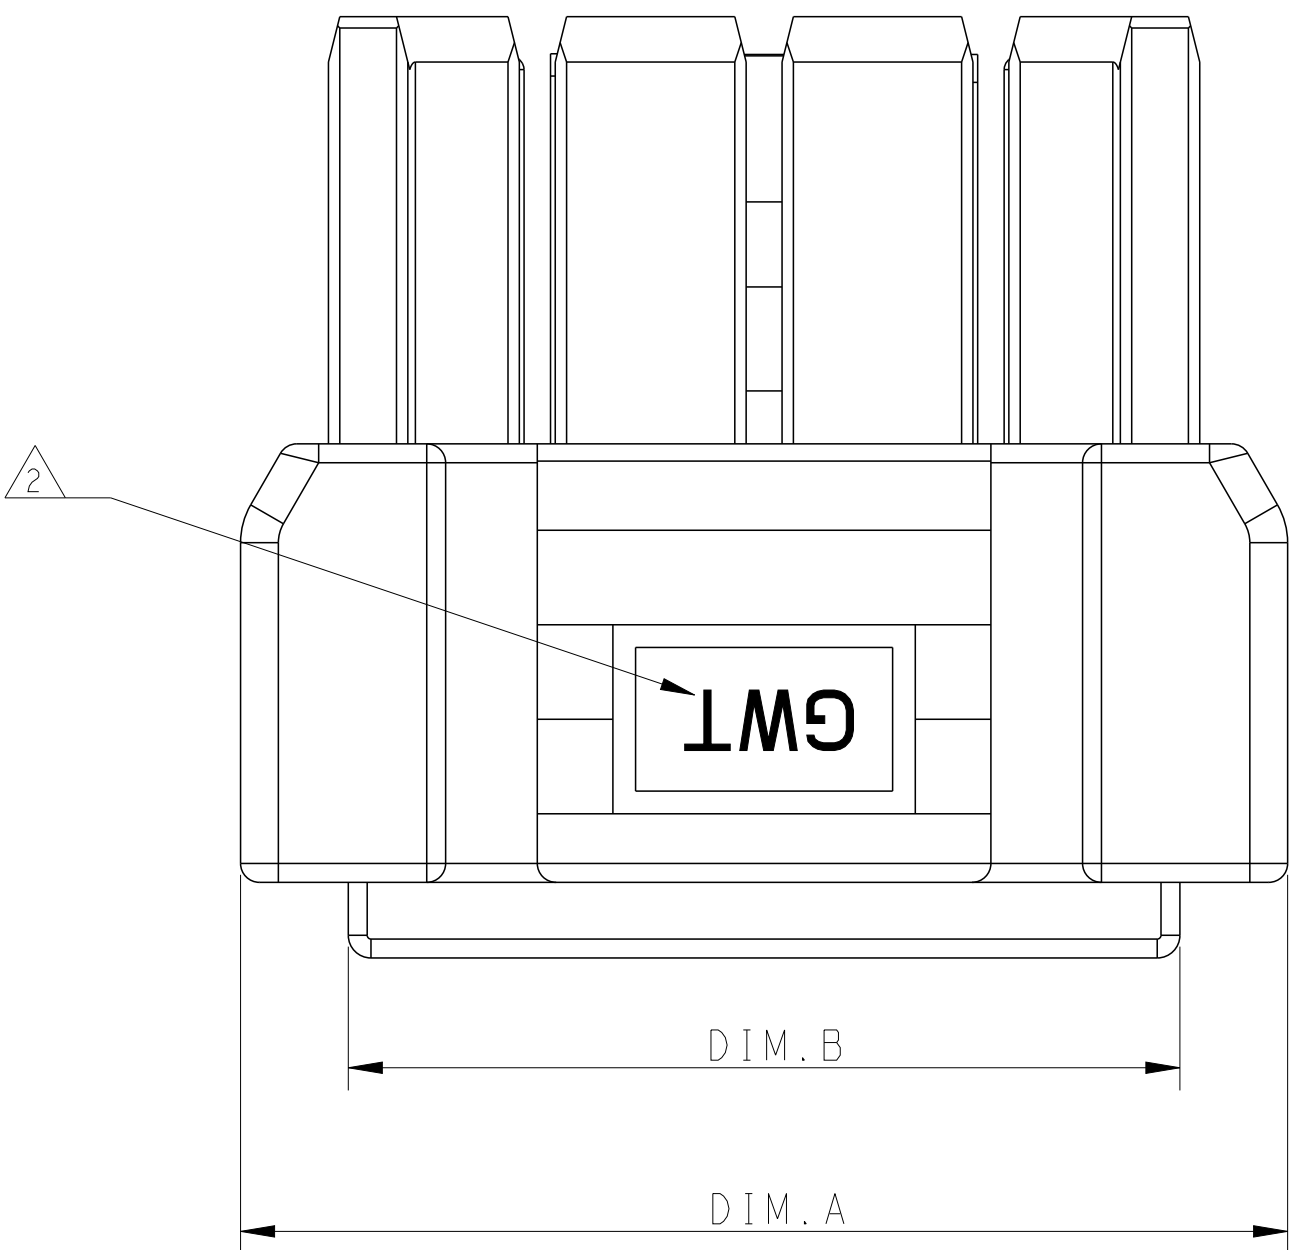

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE_WU		26MAR2013			
DIMENSIONS:		APVD	YUZHONG_MAO		26MAR2013		NAME PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -	
mm		PRODUCT SPEC						
		108-106118					SIZE A1	
		APPLICATION SPEC						
MATERIAL		114-106118					CAGE CODE 00779	
SEE TABLE		WEIGHT						
		Customer Drawing					SCALE	
							SHEET 1 OF 2	
							REV C	

LOC		DIST		REVISONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

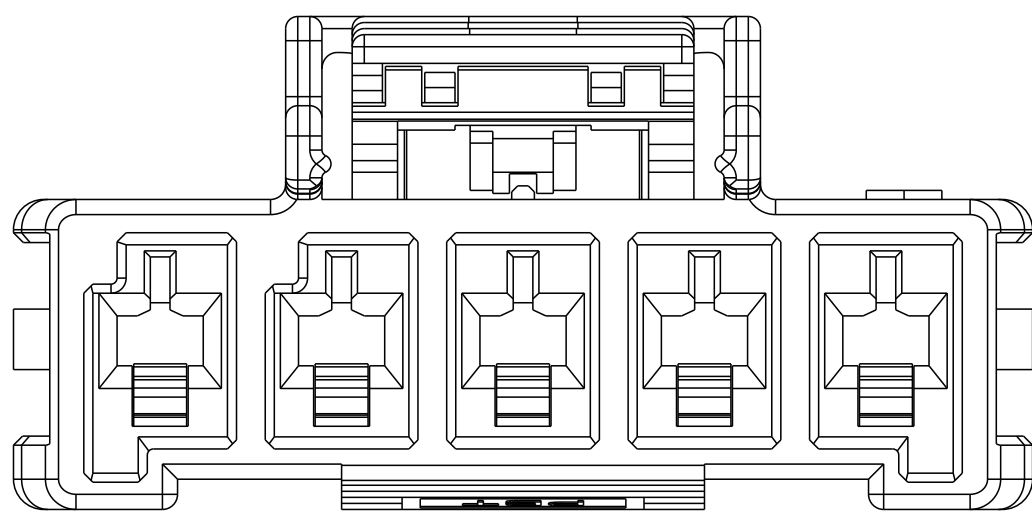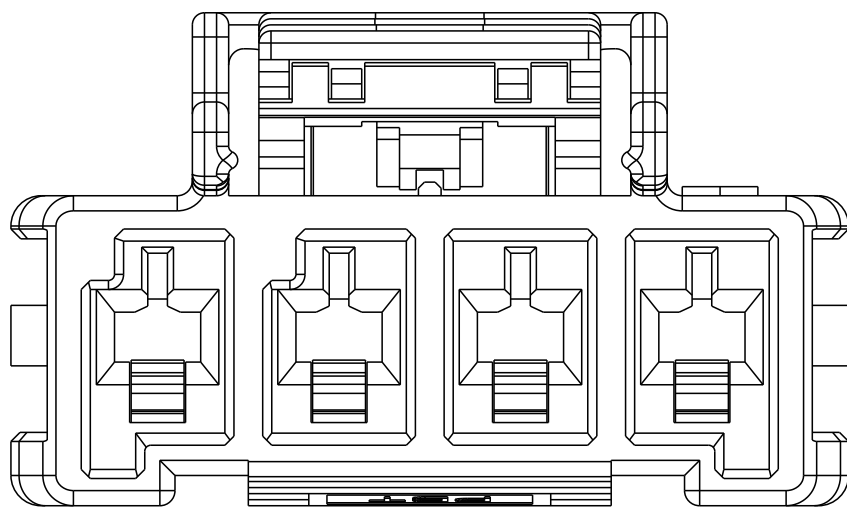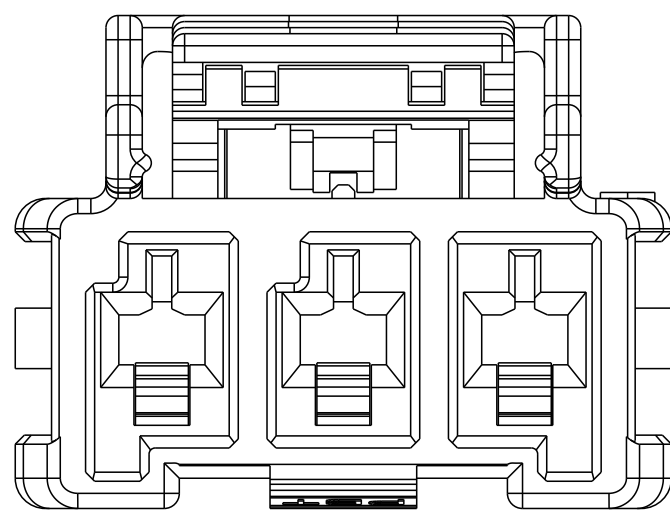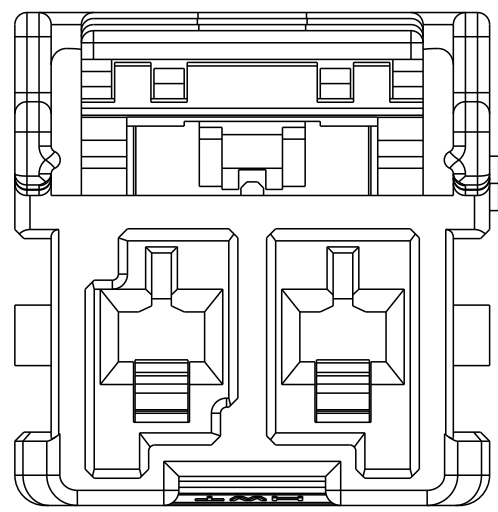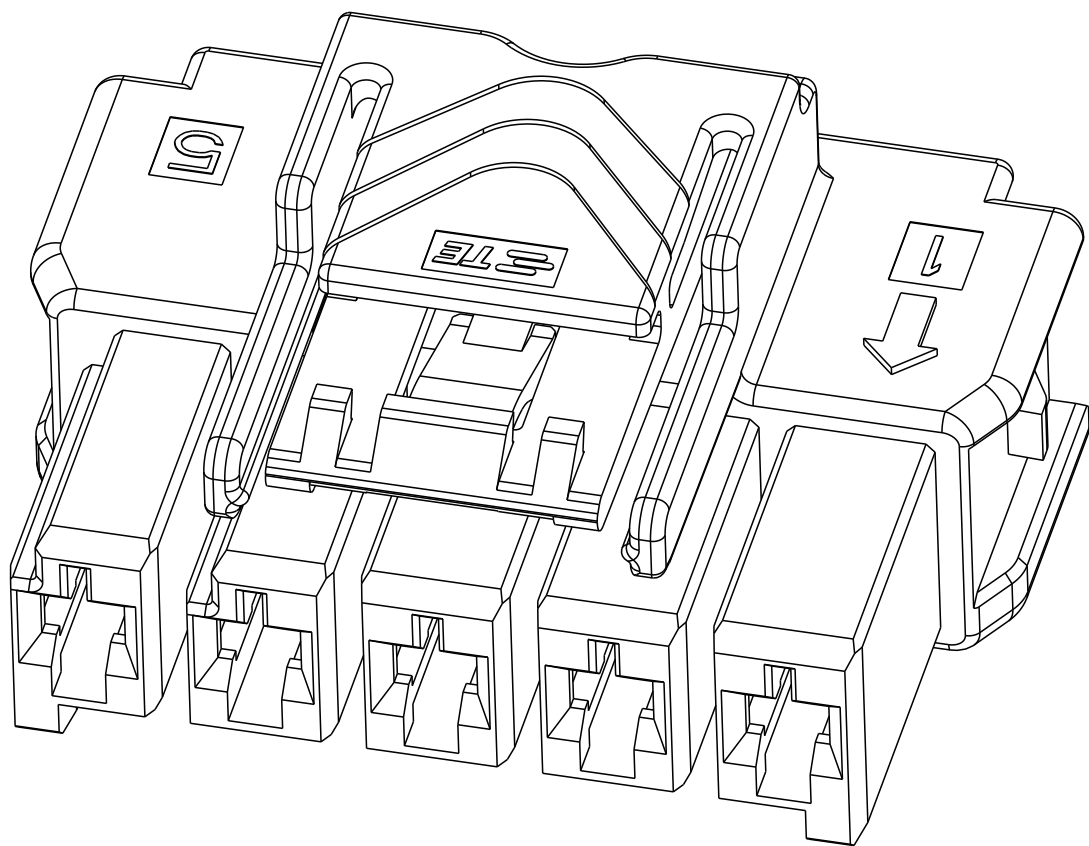
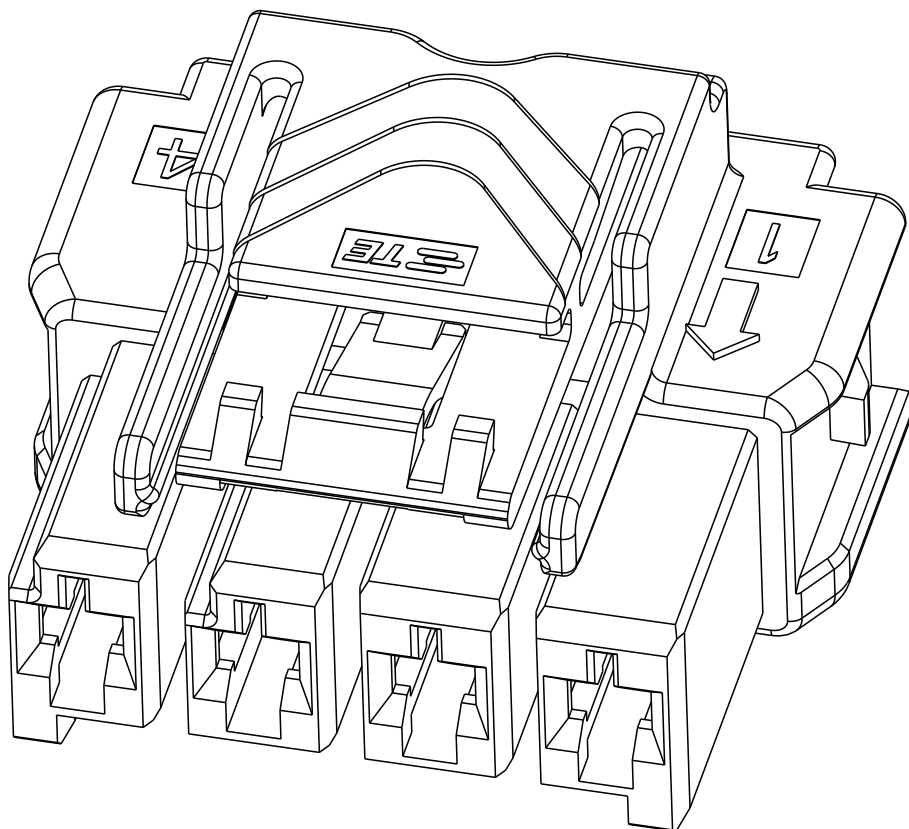
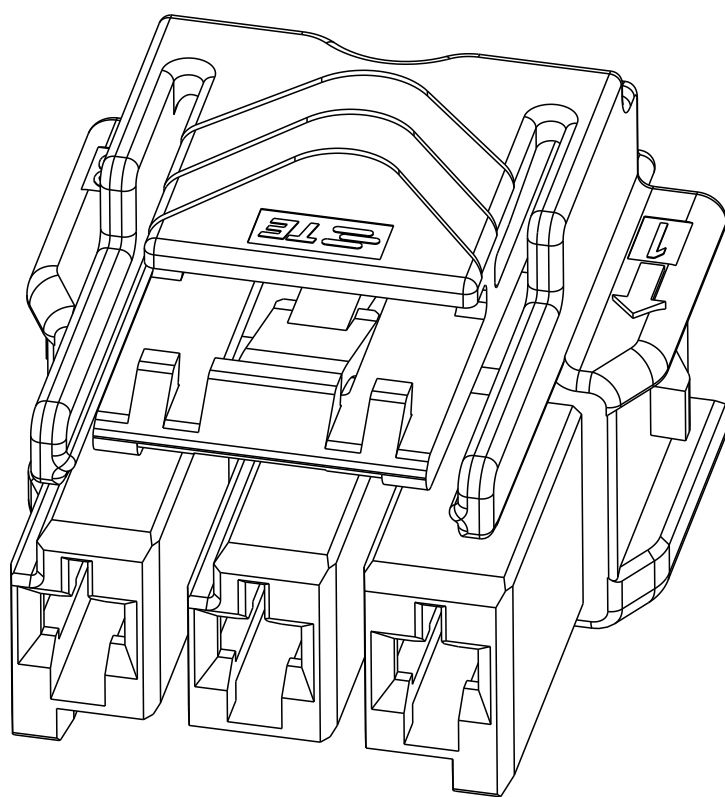
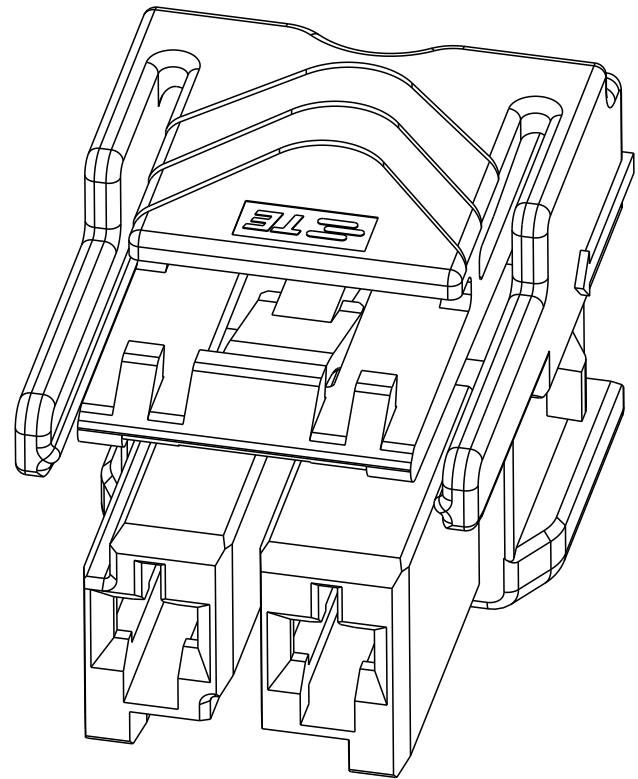


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

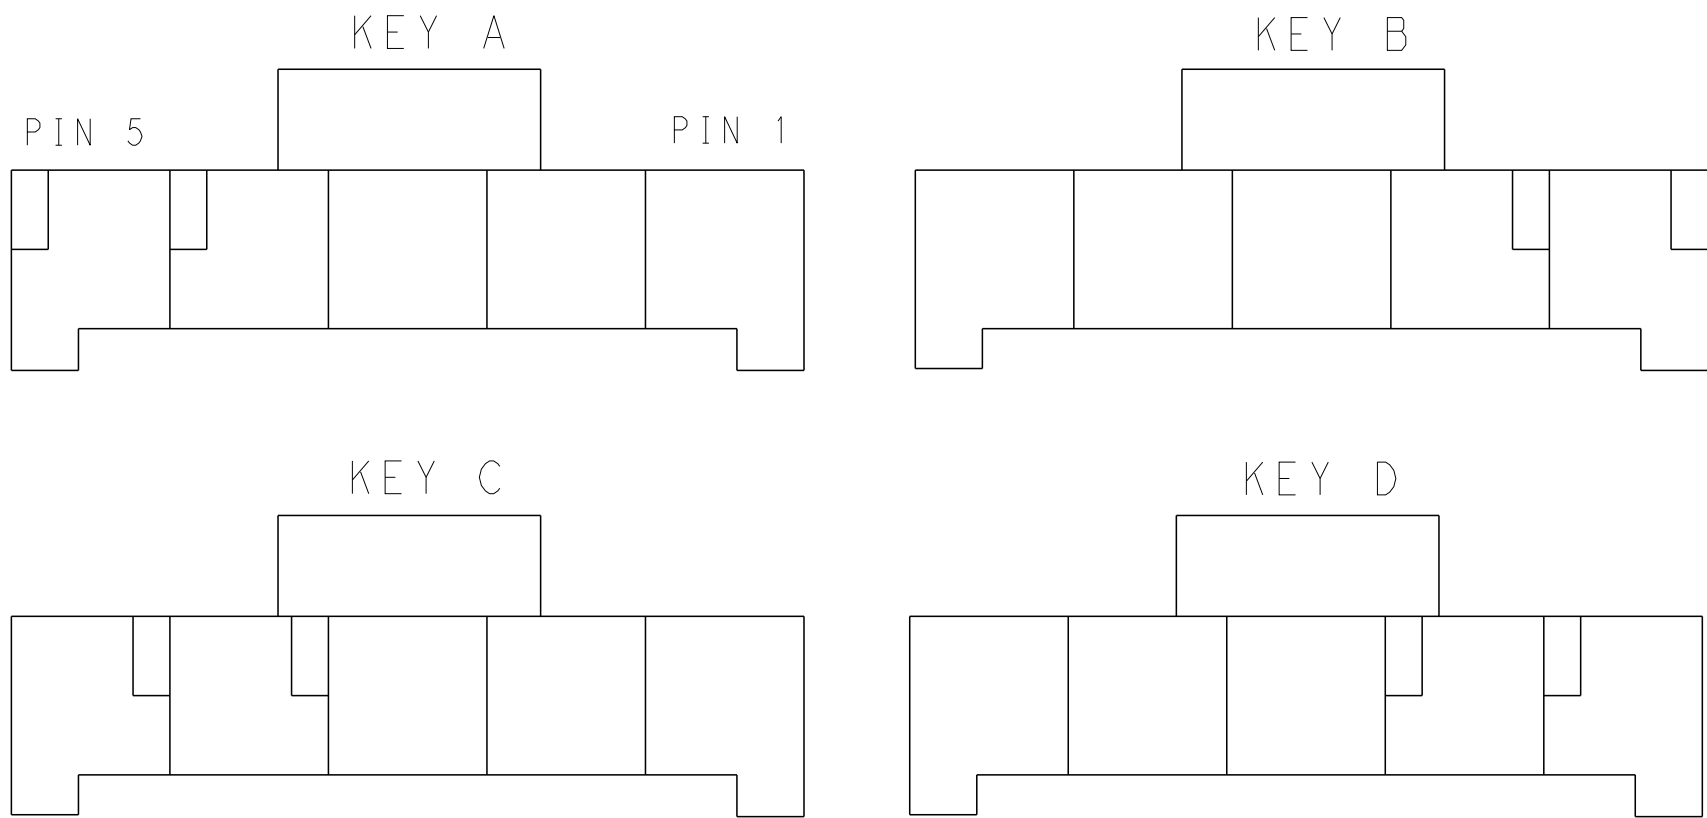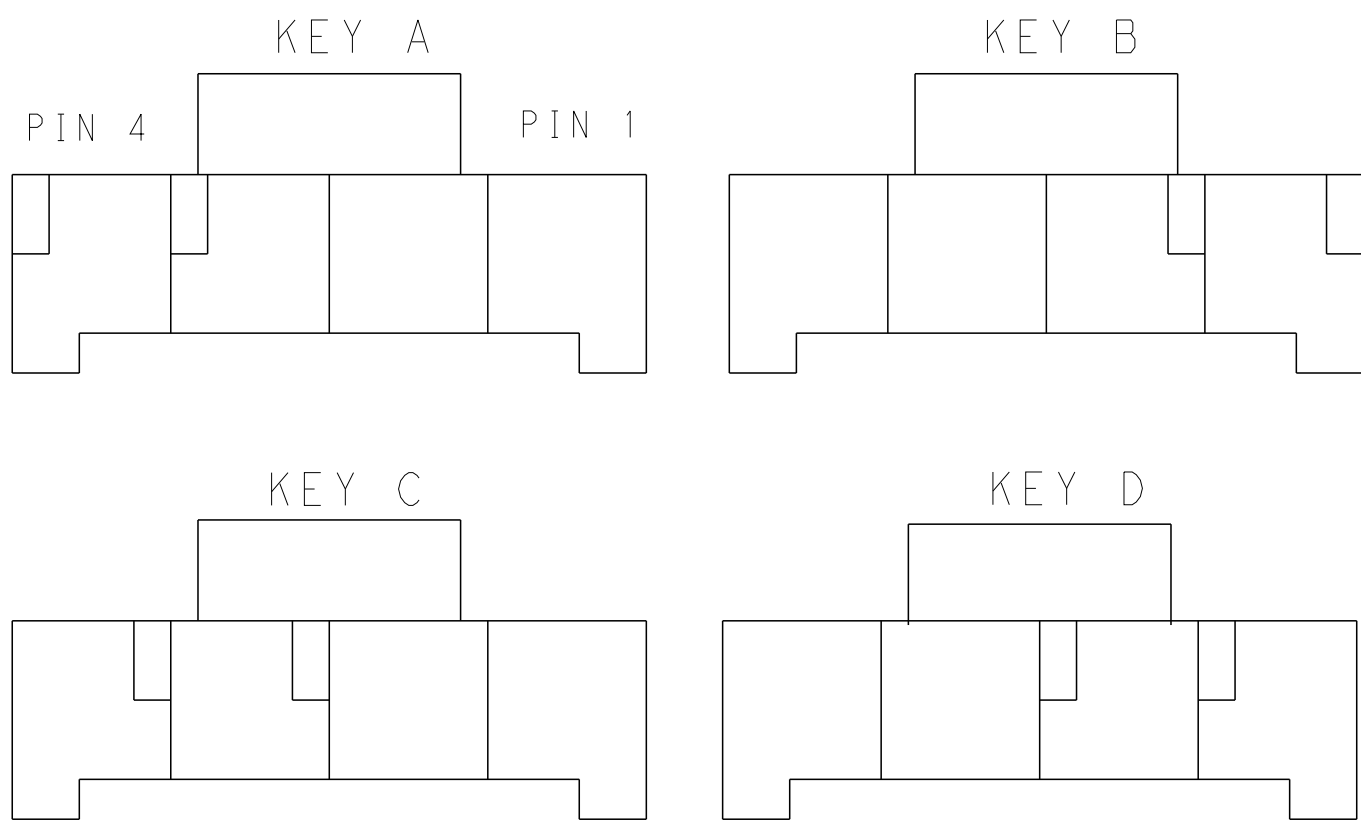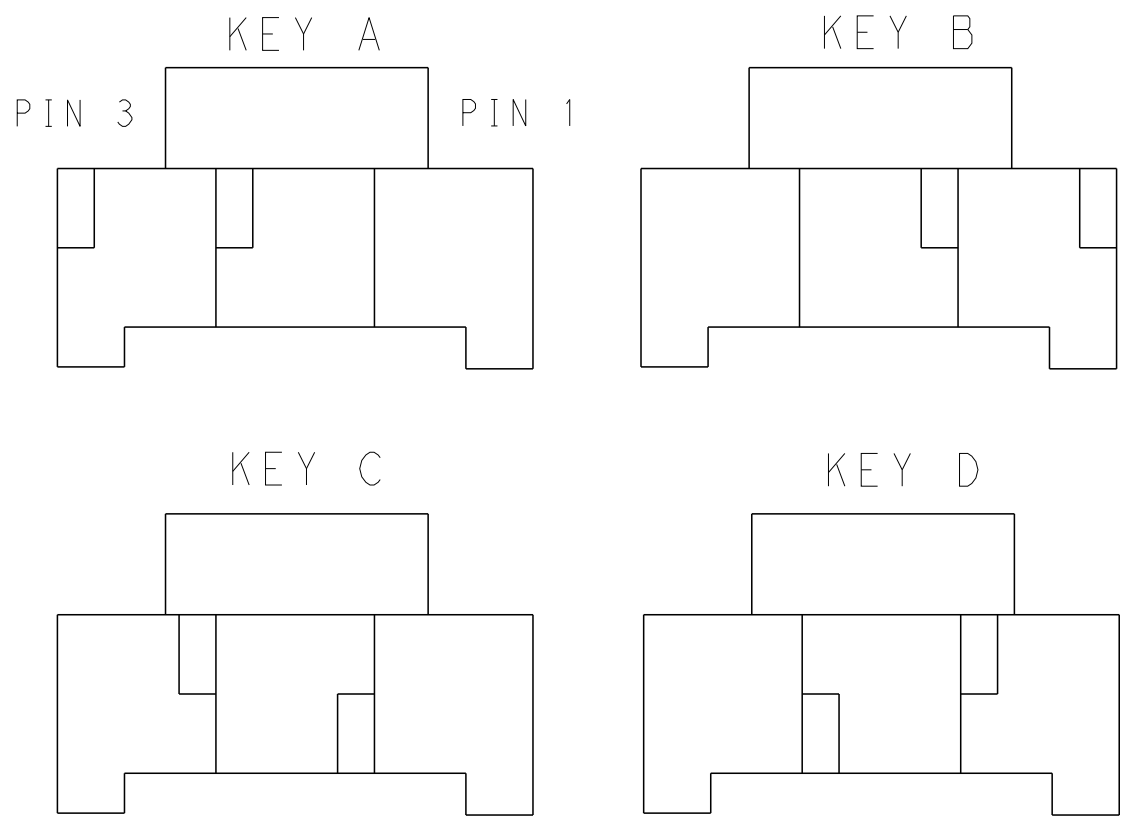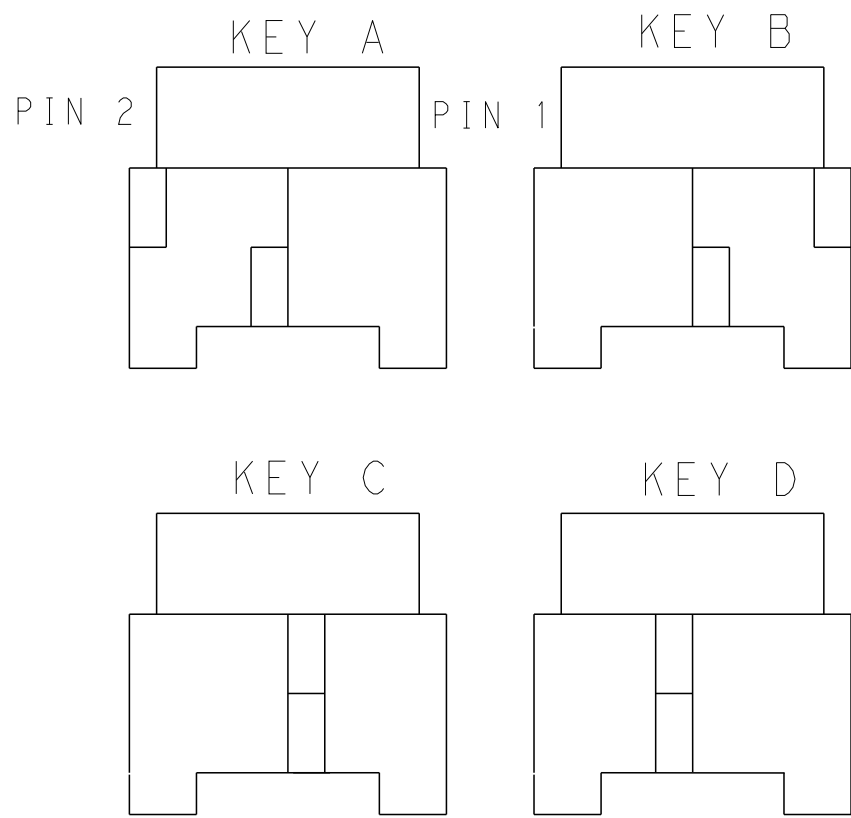


KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232265-7
		BROWN	KEY B	6-2232265-7
		GREEN	KEY C	7-2232265-7
		ORANGE	KEY D	8-2232265-7
1*4	LEVEL A	BLACK	KEY A	1-2232265-3
		DARK GREY	KEY A	5-2232265-4
		BROWN	KEY B	6-2232265-4
		GREEN	KEY C	7-2232265-4
1*3	LEVEL A	ORANGE	KEY D	8-2232265-4
		BLACK	KEY A	1-2232265-2
		DARK GREY	KEY A	5-2232265-3
		BROWN	KEY B	6-2232265-3
1*2	LEVEL A	GREEN	KEY C	7-2232265-3
		ORANGE	KEY D	8-2232265-3
	LEVEL B	DARK GREY	KEY A	5-2232265-2
		BROWN	KEY B	6-2232265-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.					 TE Connectivity			
		DWN	TOMMY WU	26MAR2013				
		CHK	HAPYE WU	26MAR2013				
		APVD	YUZHONG MAO	26MAR2013				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -		
mm		0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH -						
		PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118						
MATERIAL SEE TABLE		WEIGHT -						
Customer Drawing					A1	CAGE CODE	DRAWING NO	RESTRICTED TO
						100779C=	2232265	-
						SCALE	SHEET	2 OF 2
								REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232265-4](#)