



## Heyco® -Tite Brass Profile™ Liquid Tight Cordgrips

### Metric Hubs

The Ultimate in Liquid Tight Strain Relief Protection



- Heyco Profile Liquid Tight Cordgrips inhibit manipulation from outside the panel - there is no contact surface offering opportunity for interference by hand or tool.
- Attractive low profile shape for design-sensitive applications.
- Nickel-plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- DFARS Compliant

CABLE DIAMETER RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum		Maximum				A Clearance Hole Dia.		B Head Height		C Length Below Panel		D Wrenching Flat Size	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.

#### Standard Gland

.197	5,0	.256	6,5	<b>14800</b>	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.71	18,0
.256	6,5	.315	8,0	<b>14801</b>									
.236	6,0	.315	8,0	<b>14802</b>	M20 x 1,5	1.063	27,0	.18	4,5	.91	23,0	.85	24,0
.315	8,0	.413	10,5	<b>14803</b>									
.315	8,0	.433	11,0	<b>14804</b>	M25 x 1,5	1.260	32,0	.22	5,5	.98	25,0	1.18	30,0
.433	11,0	.591	15,0	<b>14805</b>									
.492	12,5	.630	16,0	<b>14806</b>	M32 x 1,5	1.535	39,0	.24	6,0	1.10	28,0	1.42	36,0
.630	16,0	.806	20,5	<b>14807</b>									


#### High Temperature Gland \*

.197	5,0	.256	6,5	<b>14810</b>	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.71	18,0
.256	6,5	.315	8,0	<b>14811</b>									
.236	6,0	.315	8,0	<b>14812</b>	M20 x 1,5	1.063	27,0	.18	4,5	.91	23,0	.85	24,0
.315	8,0	.413	10,5	<b>14813</b>									
.315	8,0	.433	11,0	<b>14814</b>	M25 x 1,5	1.260	32,0	.22	5,5	.98	25,0	1.18	30,0
.433	11,0	.591	15,0	<b>14815</b>									
.492	12,5	.630	16,0	<b>14816</b>	M32 x 1,5	1.535	39,0	.24	6,0	1.10	28,0	1.42	36,0
.630	16,0	.806	20,5	<b>14817</b>									

#### FDA Approved Gland \*

.197	5,0	.256	6,5	<b>14820</b>	M16 x 1,5	.866	22,0	.16	4,0	.83	21,0	.71	18,0
.256	6,5	.315	8,0	<b>14821</b>									
.236	6,0	.315	8,0	<b>14822</b>	M20 x 1,5	1.063	27,0	.18	4,5	.91	23,0	.85	24,0
.315	8,0	.413	10,5	<b>14823</b>									
.315	8,0	.433	11,0	<b>14824</b>	M25 x 1,5	1.260	32,0	.22	5,5	.98	25,0	1.18	30,0
.433	11,0	.591	15,0	<b>14825</b>									
.492	12,5	.630	16,0	<b>14826</b>	M32 x 1,5	1.535	39,0	.24	6,0	1.10	28,0	1.42	36,0
.630	16,0	.806	20,5	<b>14827</b>									

\* Special order - consult Heyco

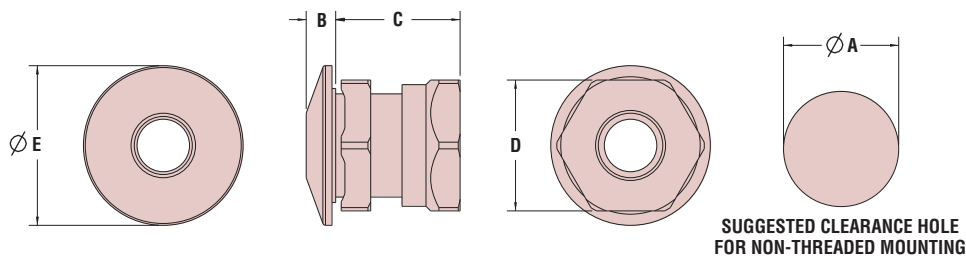

Material: Nickel-Plated Brass w/TPE Sealing Gland and FPM Sealing Washer  
 Temperature Range: -40°F (-40°C) to 212°F (100°C)  
 IP Rating: IP 68, IP 69K

Quick Specs

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[14800](#) [14815](#) [14825](#) [14806](#) [14821](#) [14803](#) [14820](#) [14802](#) [14824](#) [14804](#) [14813](#) [14816](#) [14811](#) [14812](#) [14814](#)  
[14823](#) [14807](#) [14805](#) [14817](#) [14826](#) [14801](#) [14822](#) [14827](#)