



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
G1		REVISED PER ECR-16-010133	14JUL2016	NK	DC

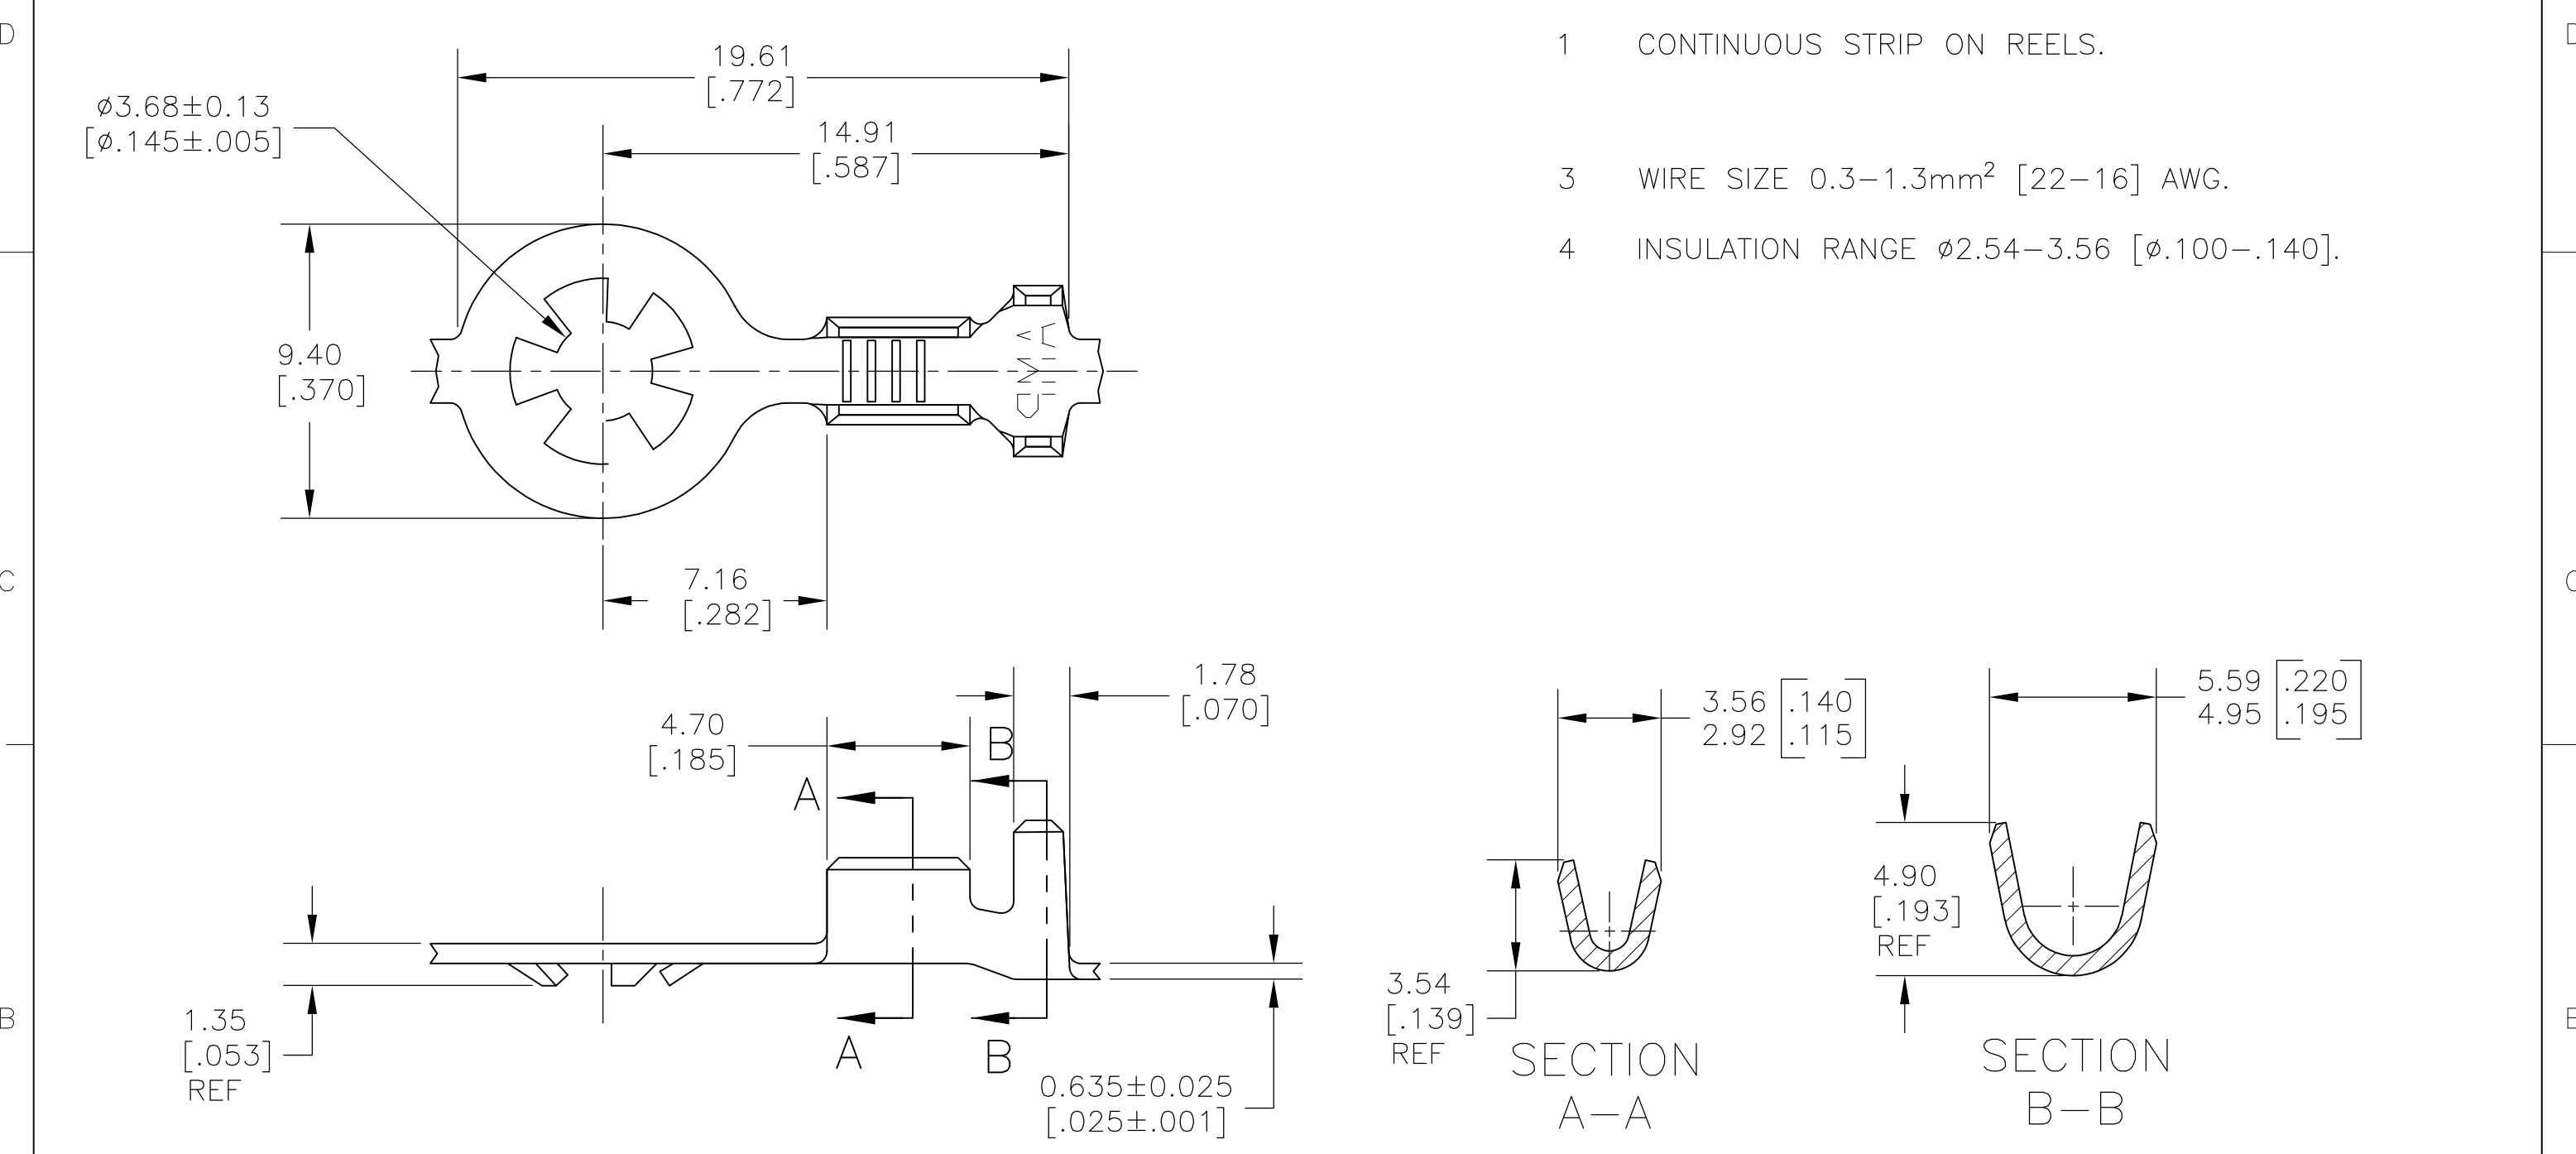

- 1 CONTINUOUS STRIP ON REELS.
- 3 WIRE SIZE 0.3-1.3mm² [22-16] AWG.
- 4 INSULATION RANGE ϕ 2.54-3.56 [ϕ .100-.140].

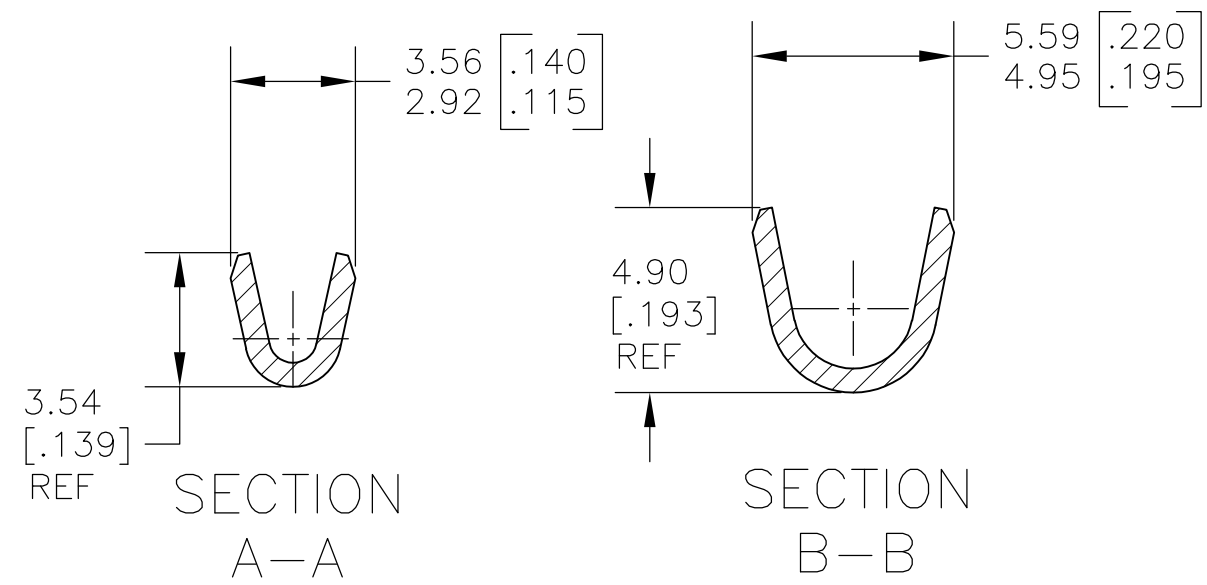

61588-1
 PART NO

F OR O OR OV	WIDTH	STRIP LENGTH	F	WIDTH	HEIGHT	WIRE
	4.57 [.180] (F AND O)	6.35 [.250]		2.54 [.100]	2.11 [.083]	1.3mm ² [16]
	3.94 [.155] (OV)				1.96 [.077]	0.8mm ² [18]
					1.85 [.073]	0.5mm ² [20]
					1.80 [.071]	0.3mm ² [22]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
 1 PLC ± -
 2 PLC ± 0.38 [.015]
 3 PLC ± -
 4 PLC ± -
 ANGLES ± 5°

MATERIAL: #4 HARD BRASS
 FINISH: TIN

DWN	jr_ruth	19JAN08
CHK	D DECKER	19JAN09
APVD	D DECKER	19JAN09
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	-	

STE TE Connectivity

RING

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-61588 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: 5:1 SHEET: 1 OF 1 REV: G1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[61588-1](#)