
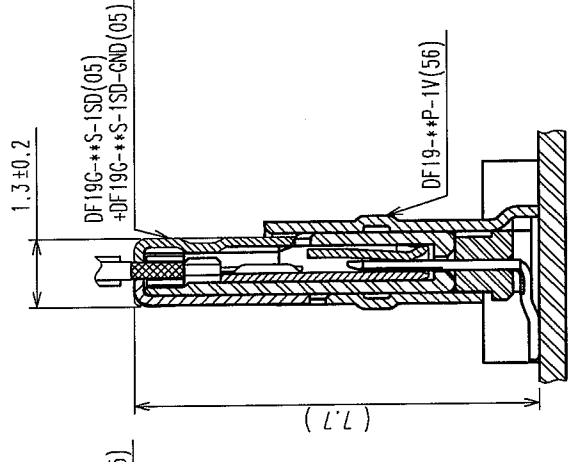
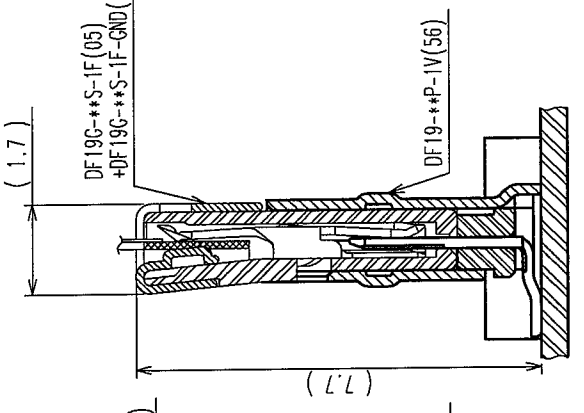
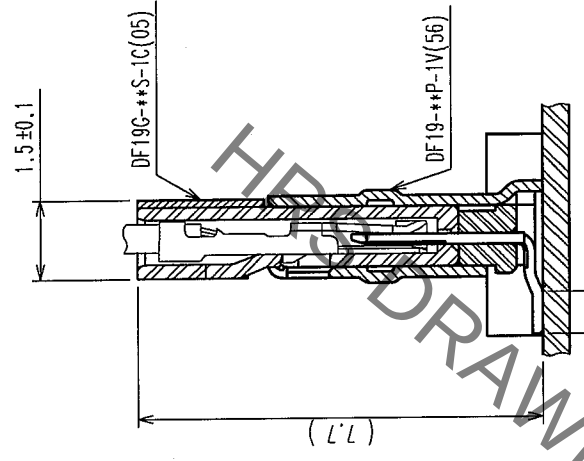
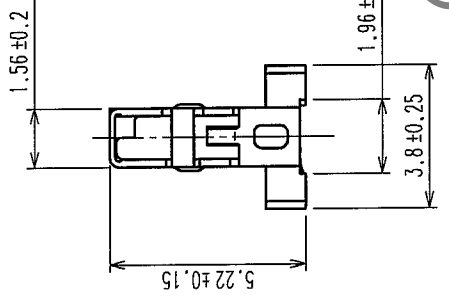
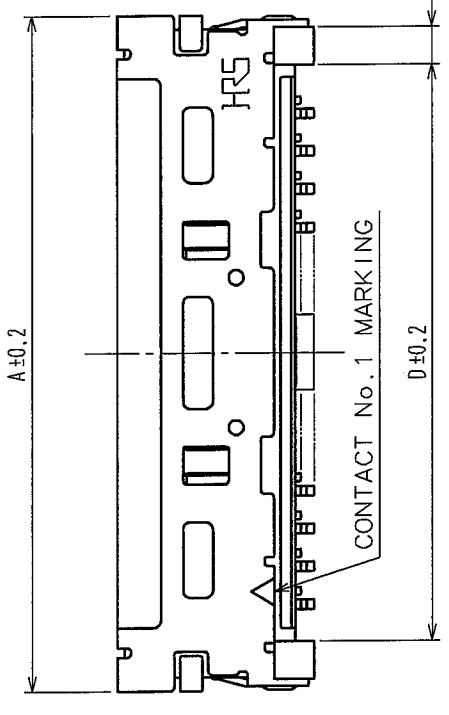





A

A

APPLICATION DIAGRAM(FREE)

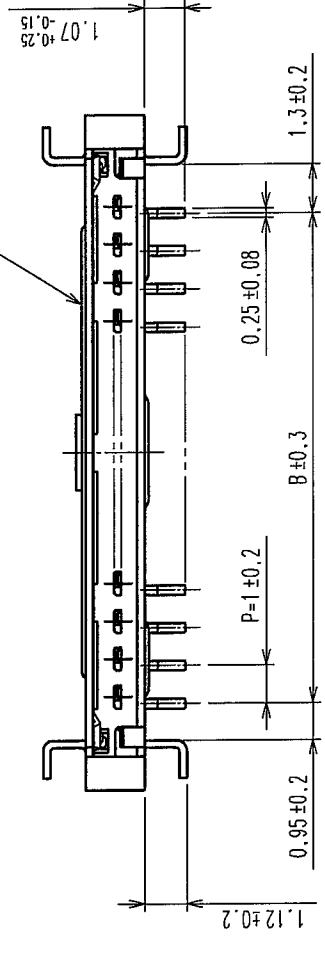

RECOMMENDED PATTERN(FREE)

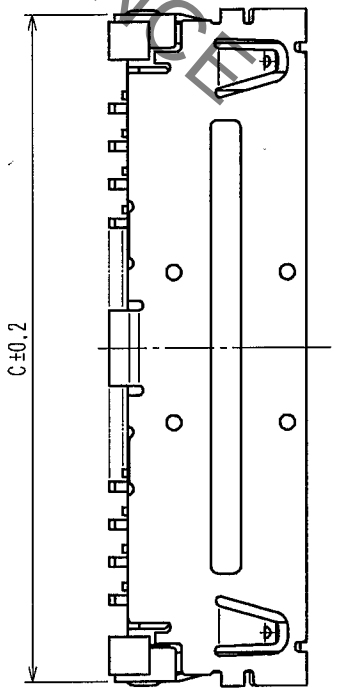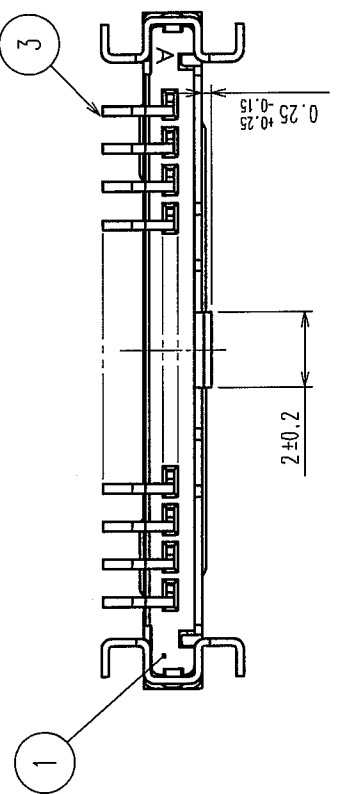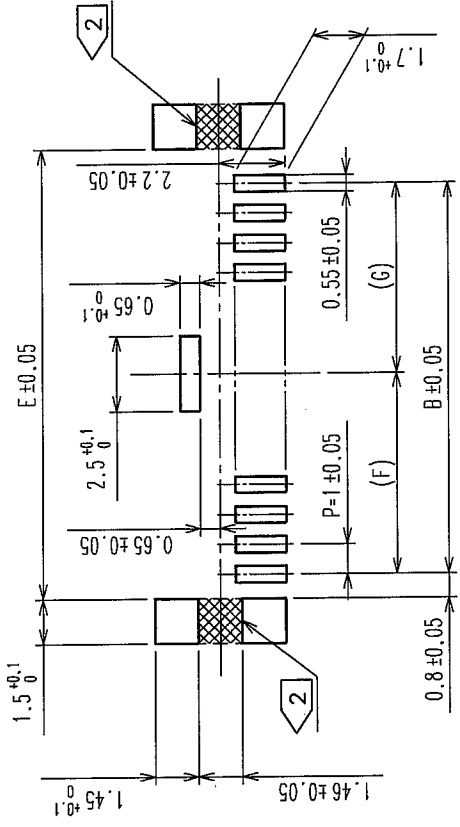

6	POLYAMIDE	CAP
5	POLYESTER	COVER TAPE, CLEAR
4	PS	EMBOSSED CARRIER TAPE, CLEAR

2	PHOSPHOR BRONZE	SURFACE: TIN-COPPER PLATED 1μm min UNDER PLATING: NICKEL PLATED 0.5μm min
1	POLYAMIDE	NATURAL (BEIGE), UL94V-0
NO.	MATERIAL	FINISH, REMARKS

PART No.	CODE No.	NUMBER OF CONTACT	A	B	C	D	E	F	G
DF19-14P-1V(56)	CL685-0036-7-56	14	17.9	13	17.65	15.25	14.95	6.675	6.325
DF19-20P-1V(56)	CL685-0037-0-56	20	23.9	19	23.65	21.25	20.95	9.675	9.325

3	PHOSPHOR BRONZE	CONTACT AREA: GOLD PLATED 0.1μm min LEAD AREA: TIN-COPPER PLATED 1μm min
NO.	MATERIAL	FINISH, REMARKS

NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		
DRAWN	F. Matsuki	DESIGNED
CHECKED	H. Imamura	APPROVED
RELEASED	J. Aka	

NOTES 1: LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2: IF THERE IS PATTERN ON PART, THERE IS A POSSIBILITY THAT IT WILL MAKE CONTACT WITH THE METAL SHELL.

DRAWING NO.	EDC3-302813-01	PART NO.	DF19-SS-P-1V(56)
SCALE	5 : 1	CODE NO.	CL685
UNITS	mm		

1	2
1	2

$\phi 1.5 \pm 0.1$
 2 ± 0.1
 4 ± 0.1
 12 ± 0.1
 $.75 \pm 0.1$



NOTES 3 : 1 REEL 1000 CONNECTORS.
4 : AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY.
AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
5 : DETAIL OF PART No. LABEL IS WRITTEN IN JAPANESE.

CL00J-***-***-***	品名	DF19-*P-1V(56)	CODE No.	NUMBER OF CONTACT	H	J	K	L	M
	納入数量	1000K ϕ	CL685-0036-7-56	14	32	28.4	14.2	18.2	32.4
	納入者	ヒロセ電機株式会社	DF19-20P-1H(56)	20	44	40.4	20.2	24.2	44.4

PART No.	CODE No.	NUMBER OF CONTACT	H	J	K	L	M
DF 19-14P-1V(56)	CL685-0036-7-56	1 4	32	28.4	14.2	18.2	32.4
DF 19-20P-1H(56)	CL685-0037-0-56	2 0	44	40.4	20.2	24.2	44.4