

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0782111044

Status:

Active

Overview:

Impact Backplane Connector and Cable Assembly System

Description:

Impact 3 Pair, Right-Angle Power Header, Press-Fit, Blade A1 & A2 Length 6.90mm, Blade B1 & B2 Length 5.70mm, LCP, Glass Filled UL94-V0, Black, Tray Packaging, Lead-Free

Documents:


3D Model

Drawing (PDF)

Packaging Specification PK-78211-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	78211
Application	Conventional, Coplanar
Application Tooling Documents	TM-622018799
Component Type	Power Header
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	883906100742
Physical	
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	Yes
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.028/g
Number of Columns	N/A
Number of Pairs	3
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	5.20mm
Pitch - Termination Interface	2.00mm, 3.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

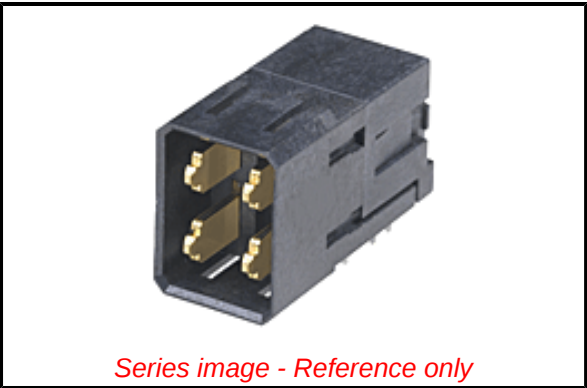

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

78211 Series

Mates With

78212 Impact Vertical Receptacle, 78348 Right Angle Receptacle

Electrical

Current - Maximum per Contact	15.0A
Data Rate	N/A
Shield Type	N/A
Shielded	No
Voltage - Maximum	250V

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-78211-001
Sales Drawing	SD-78211-002
Symbol/Footprint Data	SYM-78211-1044

This document was generated on 10/12/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

78211-1044