

F

E

D

C

B

A

F






E

D



C

B

A

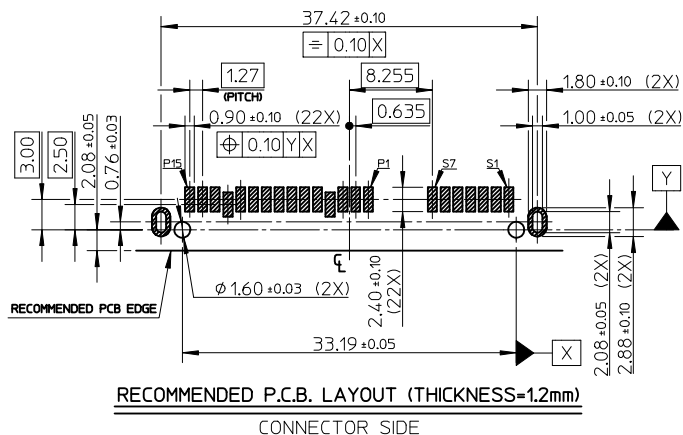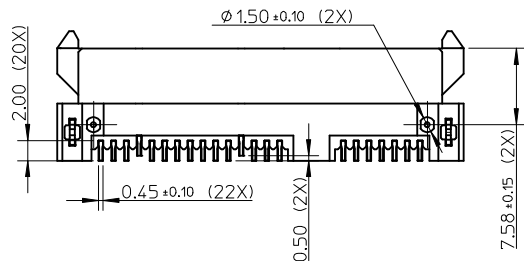
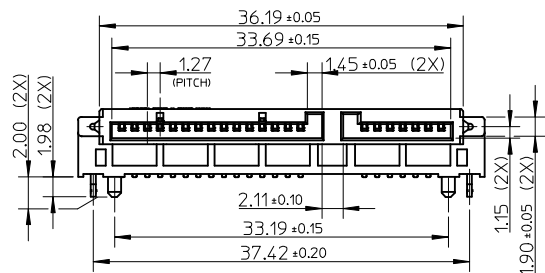
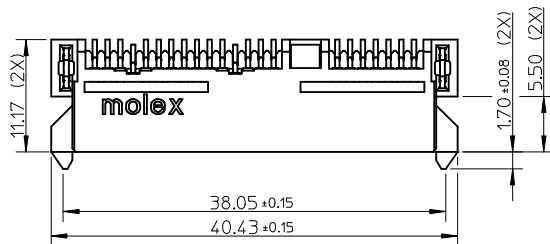


DETAIL1

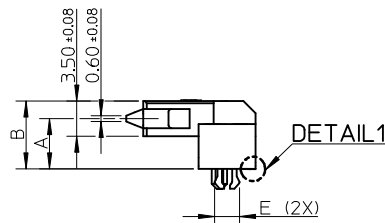

67492-1430/1431/1432
/1325/1326/1327
/1440/1441/1442
/1224/1225/1226
/1450/1451/1452.

OTHER DIMENSION PER OTHER VIEW

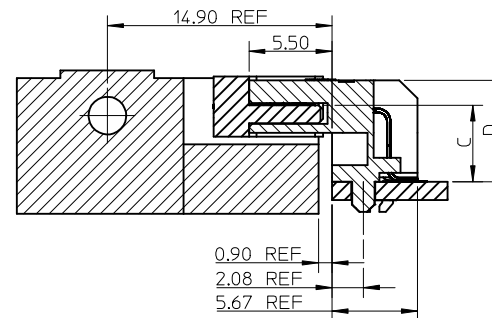

67492-1430/1431/1432
/1325/1326/1327
/1440/1441/1442
/1224/1225/1226
/1450/1451/1452.

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, UL94V-0, COLOR: BLACK;
TERMINAL: COPPER ALLOY;
FORKLOCK: COPPER ALLOY.

2. TERMINAL PLATING:

CONTACT AREA:

(A) GOLD FLASH(0.025 MICRONS MINIMUM);
(B) GOLD, THICKNESS=0.76 MICRONS MINIMUM;
(C) GOLD, THICKNESS=0.38 MICRONS MINIMUM;

SOLDER AREA: MATTE TIN, THICKNESS=1.27 MICRONS MINIMUM;
UNDER PLATE: NICKEL, THICKNESS=1.27 MICRONS MINIMUM.

3. FORKLOCK PLATING:

SOLDER AREA: MATTE TIN, THICKNESS=1.27 MICRONS MINIMUM;
UNDER PLATE: NICKEL, THICKNESS=1.27 MICRONS MINIMUM.

4. PRODUCT SPECIFICATION: REFER TO PS-67492-001.

5. PACKAGING METHOD: TRAY, USE DRYER IN HDPE BAGE TO PREVENT BLISTER.

6. MATING PARTS: 87703/87672.

7. PRODUCT COMPLIANT TO RoSH DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC.

REVISED EC NO: SH2011-0008 DRAWN:GLLI CHKD: APPR:RZHANG	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
						MM ONLY		1:1	METRIC		
						DRAWN BY		DATE		TITLE	
						GRATE MA		2003/10/10			
						CHECKED BY		DATE			
						YA JUN		2003/10/10		MOLEX INCORPORATED	
						APPROVED BY		DATE			
						SAM		2003/10/10			
						MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						SEE SHEET 2		SD-67492-001		1 OF 2	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

tb_frame_A3_P_AM_T
Rev. F 2009/06/18

tb_frame_A3_P_AM_T
Rev. F 2009/06/18