


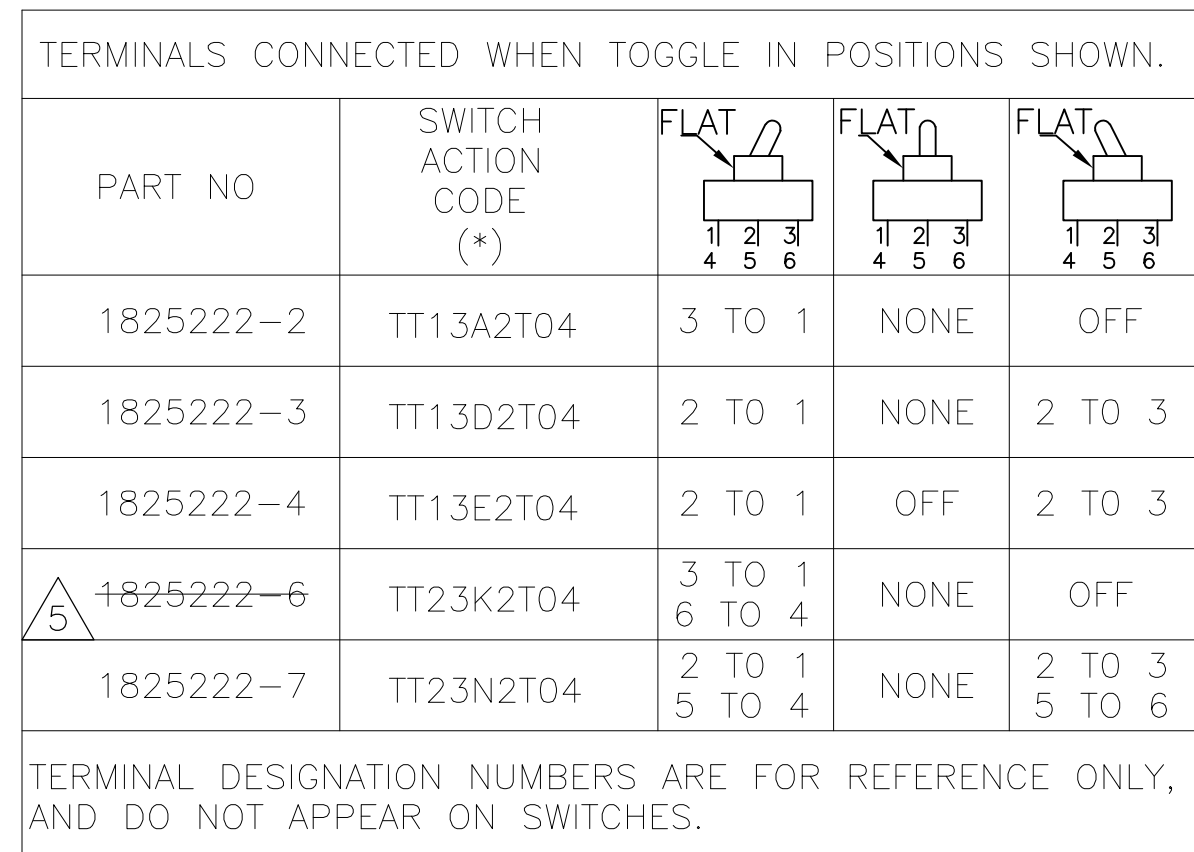

1. MATERIALS:
CASE AND ACTUATOR: THERMOPLASTIC, UL94-V0.
FRAME: STEEL, TIN PLATED.
BUSHING AND ACTUATOR LEVER: BRASS, NICKEL PLATED
ROCKER CONTACT: SILVER/BRASS, LAMINATED.
PLUNGER: STAINLESS STEEL, PASSIVATED
SPRING: MUSICAL WIRE.
TERMINALS: SILVER/BRASS, LAMINATED, SILVER PLATED.
TERMINAL SEAL: SP EPOXY
DP EPOXY OPTIONAL
2. ELECTRICAL:
CURRENT RATING: 3A @ 125V AC OR 28V DC (2 POSITION)
2A @ 125V AC (3 POSITION)
INITIAL CONTACT RESISTANCE: 20 MLLIOHMS MAX
INSULATION RESISTANCE: 1,000 MEGAOHMS AT 500V DC MIN
DIELECTRIC STRENGTH: 1,000 VOLTS RMS AT SEA LEVEL
LIFE EXPECTANCY: 80,000 CYCLES (2 POSITION)
60,000 CYCLES (3 POSITION)
3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -22°F TO +185°F (-30°C TO +85°C)
STORAGE TEMPERATURE: -67°F TO +185°F (-55°C TO +85°C)
4. TT13A2T04 HAS TERMINALS 1, 3, 4 & 6
HARDWARE INCLUDED: 1 HEX NUT AND 1 LOCKWASHER.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA		26AUG10		 TE Connectivity	
		CHK EPPLEY NAZ		26AUG10			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD EPPLEY NAZ		NAME	
		0 PLC ± -		PRODUCT SPEC		SWITCH, TINY TOGGLE SERIES, 1 & 2 POLE	
		1 PLC ± -		—			
		2 PLC ± -		APPLICATION SPEC			
		3 PLC ± -		—			
4 PLC ± -		—		SIZE		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		CAGE CODE	
-		-		-		DRAWING NO	
				A2		00779	
				CUSTOMER DRAWING		C-1825222-2	
						SCALE 4:1	
						SHEET 1 OF 1	
						REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TT13D2T04](#)