

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output


bel
POWER PRODUCTS

VRBC-10A2Ax

RoHS Compliant

Rev.A

- Non-Isolated
- Fixed Frequency
- High Efficiency
- Low Cost
- Wide Input
- Flexible Output Voltage Sequencing
- Output Voltage Prebias
- Under-Voltage Lockout (UVLO)
- Over Temperature Shutdown
- OCP/SCP
- Wide Trim
- Remote Sense
- Remote On/Off
- Active Low/High (Option)
- Industrial Temperature Range

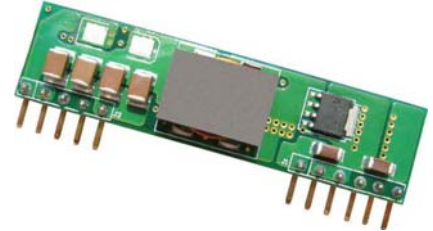

Description

The Bel VRBC-10A2Ax are series of the non-isolated dc/dc converter Power Module. The modules use a SIP package. These converters are available in a range of output voltages from 0.75 Vdc to 5.0 Vdc over a wide range of input voltage ($V_{IN} = 8.3 \text{ Vdc} - 14 \text{ Vdc}$). The Bel VRBC-10A2Ax has a sequencing feature that enables designers to implement various types of output voltage sequencing when powering. The efficiency is typically 95% at 5 Vdc output at full load.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V - 5.0 V	8.3 V - 14 V	10 A	50.0 W	95%	VRBC-10A2AL	VRBC-10A2A0

Notes: 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	15 V	
Output Enable Terminal Voltage	-0.3 V	-	15 V	
Sequencing Voltage ¹	-0.3 V	-	V_{in}	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. VRBC-10A2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When the sequencing feature is not used, tie the SEQ pin to V_{in} or leave it unconnected.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage				
Vo, set $\leq$ 3.63 V	8.3 V	12 V	14 V	
Vo, set $>$ 3.63 V	8.3 V	12 V	13.2 V	
Input Current (full load)	-	-	6.5 A	An input line fuse must always be used.
Input Current (no load)	-	80 mA	-	
Remote Off Input Current	-	2 mA	-	
Input Reflected Ripple Current (pk-pk)	-	-	100 mA	Tested with one 1000 μ F/25 V AL input capacitor with ESR=0.03 ohm max and 4 $\times$ 47 μ F/25 V tan capacitors with ESR=0.013 ohm max at 100 kHz, & simulated source impedance of 1000 nH, 5 Hz to 20 MHz.
Input Reflected Ripple Current (rms)	-	-	30 mA	
I ² t Inrush Current Transient	-	0.2 A ² s	0.4 A ² s	
Turn-on Voltage Threshold	-	7.9 V		
Turn-off Voltage Threshold	-	7.8 V		

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% Vo,set	-	2% Vo,set	Vin=12 V, full load
Load Regulation	-	0.3% Vo,set	-	
Line Regulation	-	0.2% Vo,set	-	
Regulation Over Temperature (-40 °C to +85 °C)	-	0.4% Vo,set	-	Tref=Tamin to Tamax
Output Current	0 A	-	10 A	
Current Limit Threshold	-	200% Io	-	
Short Circuit Surge Transient	-	1 A ² s	3 A ² s	
Ripple and Noise (pk-pk)	-	40 mV	100 mV	Tested with 0-20 MHz, with 10 μ F tantalum capacitor & 1 μ F ceramic capacitor
Ripple and Noise (rms)	-	20 mV	40 mV	
Turn on Time	-	8 mS	20 mS	
Overshoot at Turn on	-	-	1% Vo,set	
Output Capacitance	0 μ F	-	5000 μ F	
Transient Response				
50% ~ 100% Max Load	Vo = 0.75 V - 5 V	-	100 mV	di/dt=2.5 A/ μ S; Vin=12 V; and with 470 μ F tantalum capacitors at the output
Settling Time		-	50 μ S	
100% ~ 50% Max Load		-	100 mV	
Settling Time		-	50 μ S	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output




General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Measured at Vin=12 V, full load
Vo=5.0 V	-	95%	-	
Vo=3.3 V	-	93%	-	
Vo=2.5 V	-	92%	-	
Vo=1.8 V	-	90%	-	
Vo=1.5 V	-	89%	-	
Vo=1.2 V	-	87.5%	-	
Vo=0.75 V	-	81%	-	
Switching Frequency	265 kHz	300 kHz	335 kHz	
Over Temperature Shutdown ¹	-	130 °C	-	
Output Voltage Trim Range	0.7525 V	-	5.0 V	
Remote Sense Compensation	-	-	0.5 V	
MTBF	5,114,191 hours			Calculated Per Bell Core SR-332 (Io = 80% load; Vo=3.3 V; Vin=12 V; Ta = 25°C)
Dimensions				
Inches (L x W x H)	2.0 x 0.5 x 0.32			
Millimeters (L x W x H)	50.8 x 12.7 x 8.13			
Weight	-	7.1 g	-	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. The Tref temperature measurement location:

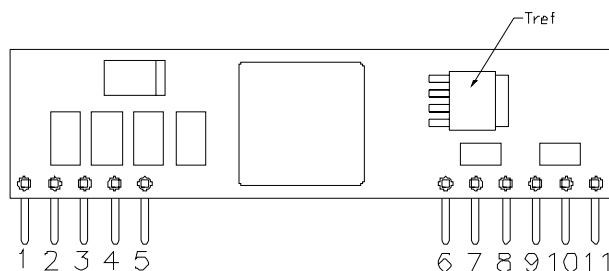

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.2 V	-	0.3 V	VRBC-10A2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	-	-	Vin, max	
Signal Low (Unit On)	-0.2 V	-	0.3 V	VRBC-10A2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5 V	-	Vin, max	
Voltage Sequencing				
Sequencing Delay Time	25 mS	-	-	Delay from Vin, min to application of voltage on SEQ pin
Sequencing Slew Rate Capability	-	-	2 V/mS	Vinmin to Vinmax; Iomin to Iomax; Vseq<Vo
Tracking Accuracy				
Power-Up	-	100 mV	200 mV	
Power-Down	-	200 mV	400 mV	

NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/10 A Output

bel
POWER PRODUCTS

Output Trim Equations


Equation for calculating the trim resistor (in Ω) given the desired output voltage (V_o) is shown below. The R_{trim} resistor should be connected between the trim pin and GND.

$$R_{trim} = \left[\frac{10500}{V_o - 0.7525} - 1000 \right]$$

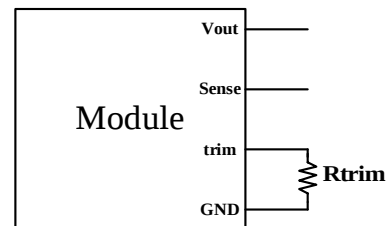


Equation for calculating the trim voltage (in V) given the desired output voltage (V_o) is shown below. The V_{trim} voltage should be connected between the trim pin and GND.

$$V_{trim} = \{0.7 - 0.0667 \times (V_o - 0.7525)\}$$

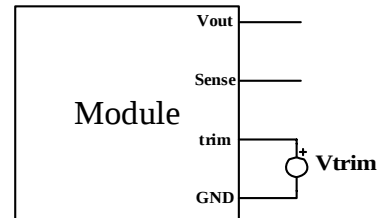

Thermal Derating Curve

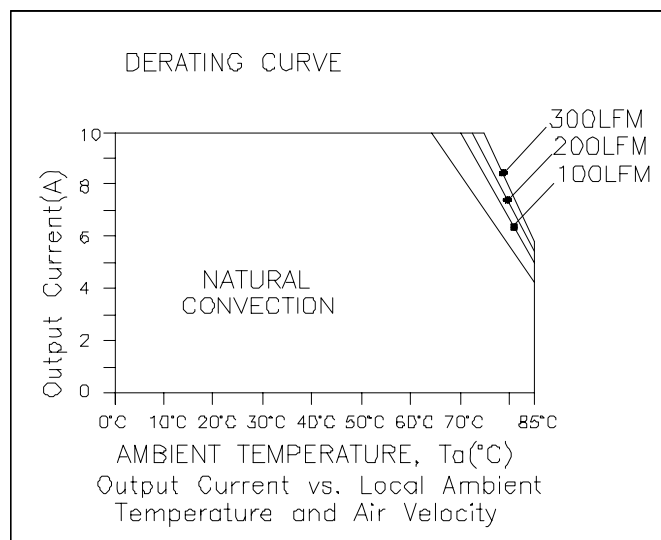

$V_{in}=12\text{ V}$, $V_o=3.3\text{ V}$




NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output



Efficiency Data

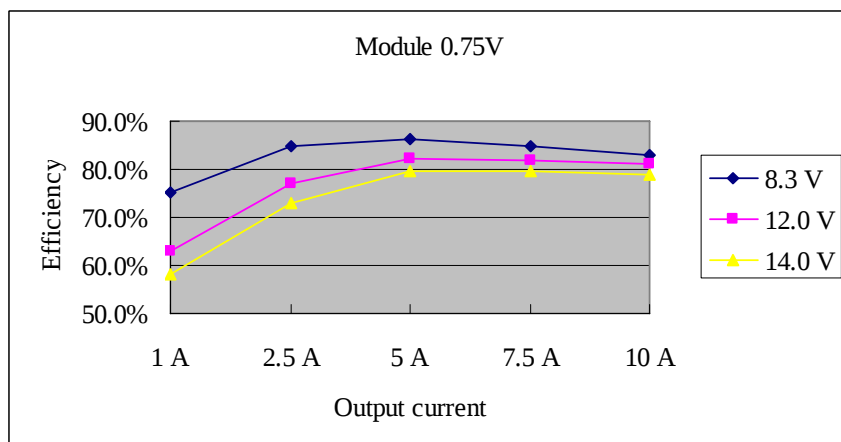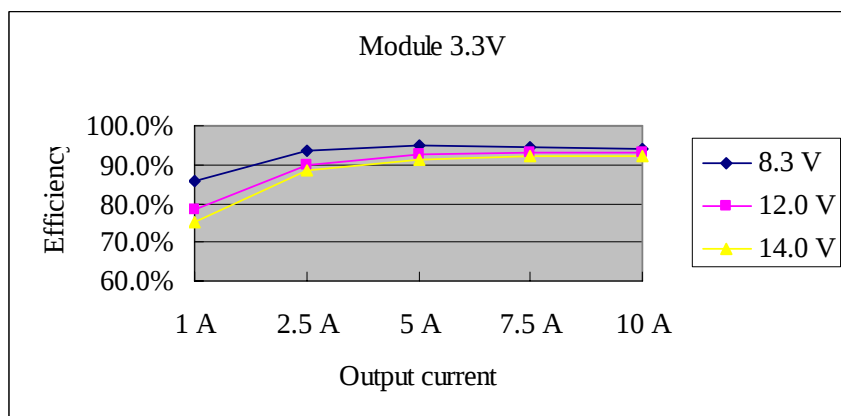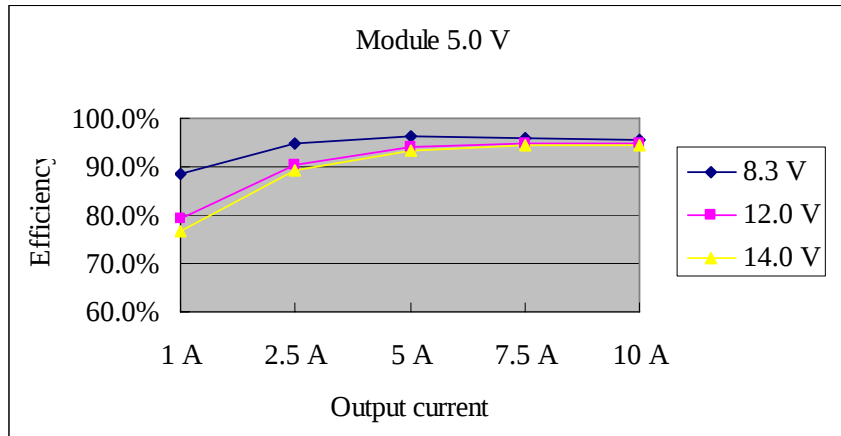


NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/10 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveforms

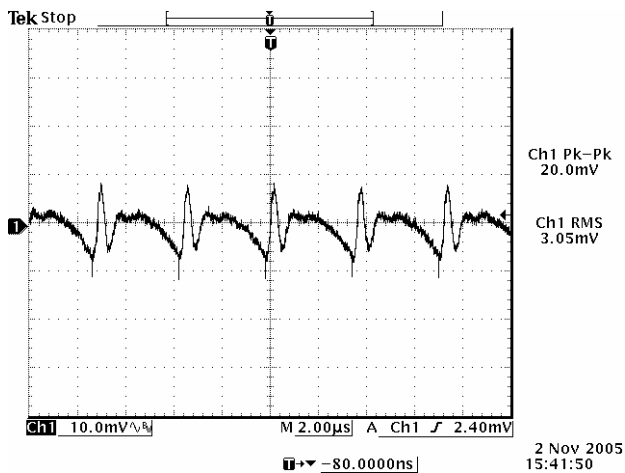

12 Vdc input, 0.75 V output

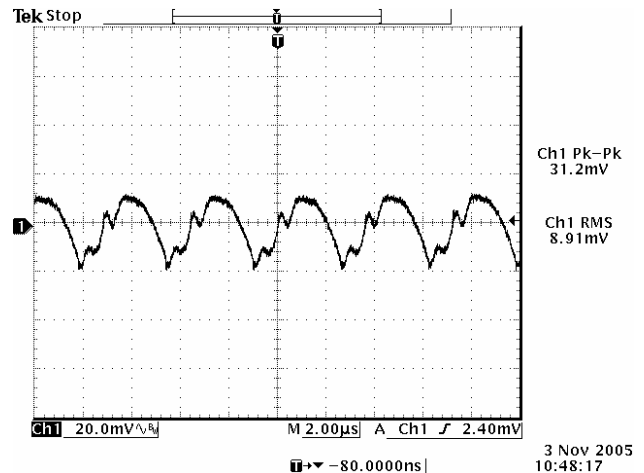

12 Vdc input, 3.3 V output

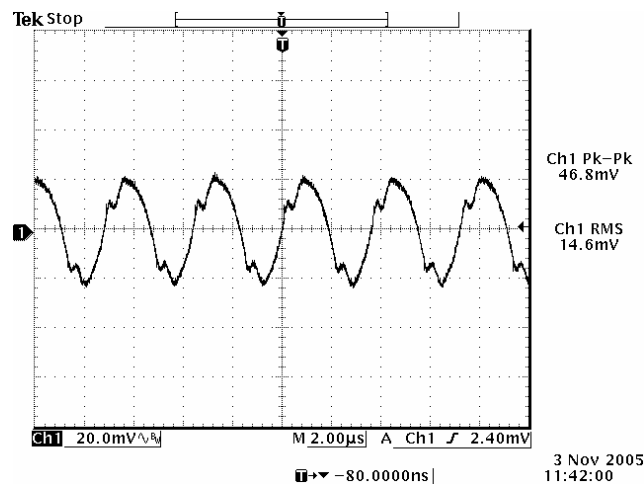

12 Vdc input, 5.0 V output

Note: Ripple and Noise at full load, with 10 μF tantalum capacitor and 1 μF ceramic capacitor at the output, and $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input


0.75 Vdc - 5.0 Vdc/10 A Output

bel
POWER PRODUCTS


Transient Response Waveforms

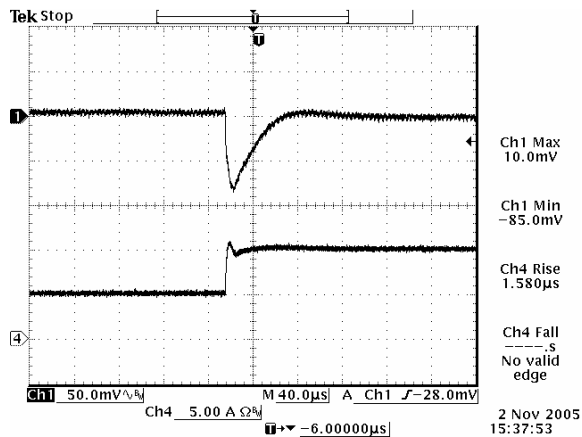


Transients 50% to 100% load 0.75 Vdc output

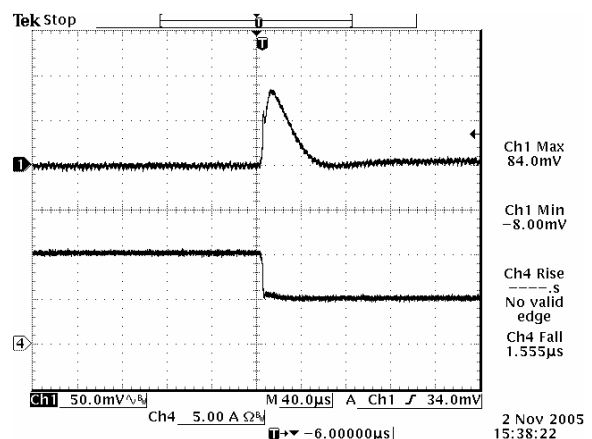


Transients 100% to 50% load 0.75 Vdc output

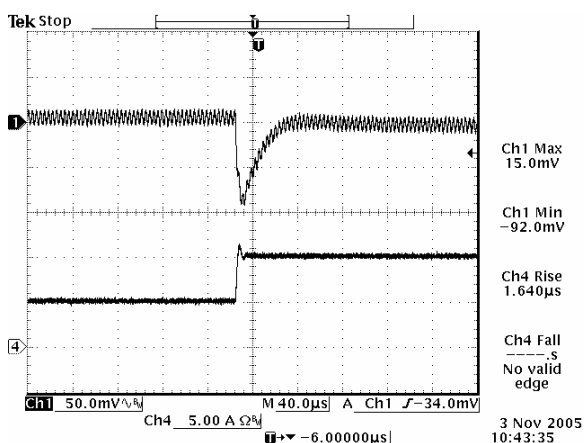


Transients 50% to 100% load 3.3 Vdc output

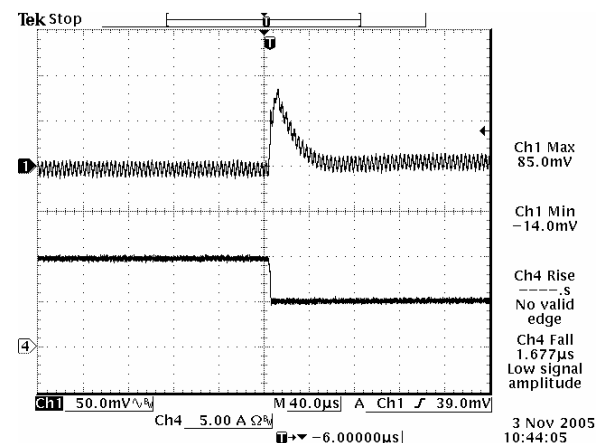

Transients 100% to 50% load 3.3 Vdc output

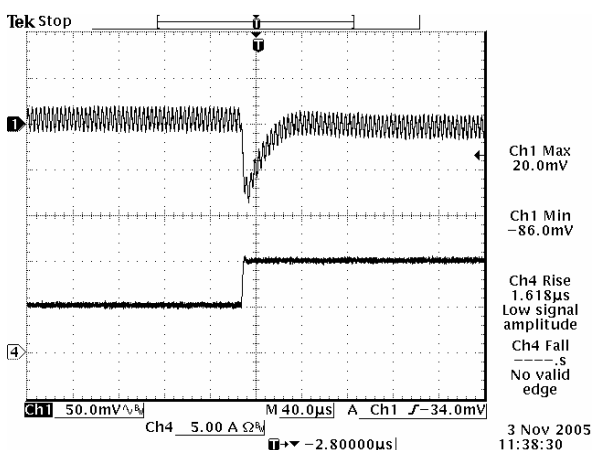

Transients 50% to 100% load 5.0 Vdc output

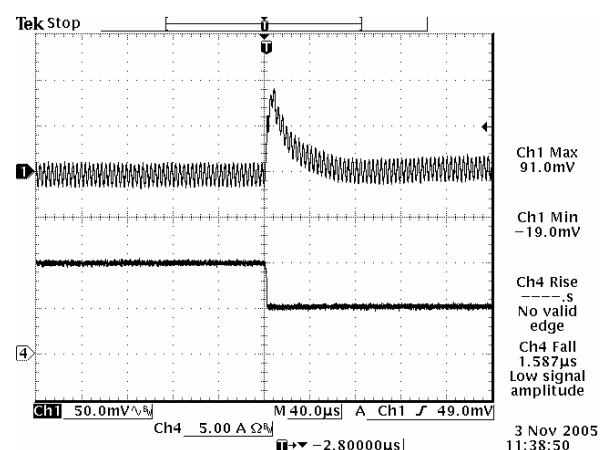

Transients 100% to 50% load 5.0 Vdc output

Note: Transient response at 12 V input, $di/dt=2.5 \text{ A}/\mu\text{S}$, with external 470 μF tantalum capacitor at the output, $T_a=25 \text{ deg C}$.


NON-ISOLATED DC/DC CONVERTERS

8.3 Vdc - 14 Vdc Input

0.75 Vdc - 5.0 Vdc/10 A Output

bel
POWER PRODUCTS

Mechanical Outline

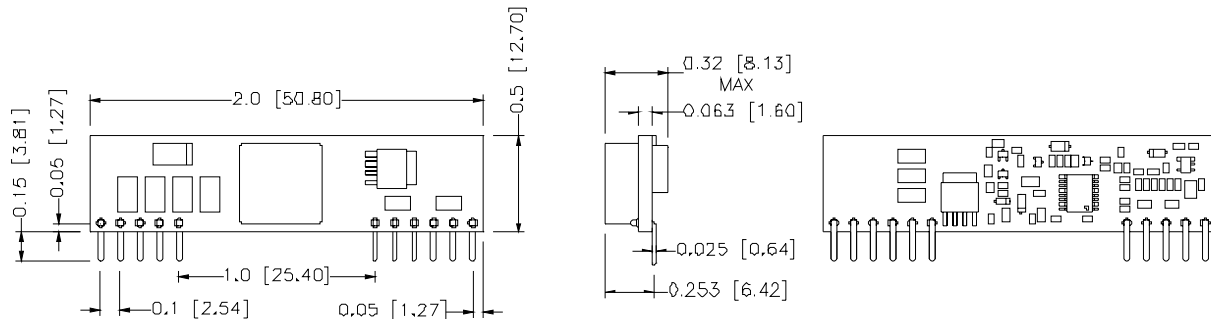


UNIT: INCH [MM]


TOP VIEW

SIDE VIEW

BACK VIEW

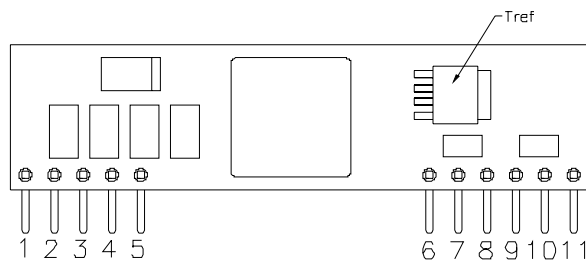

RECOMMENDED PAD LAYOUT

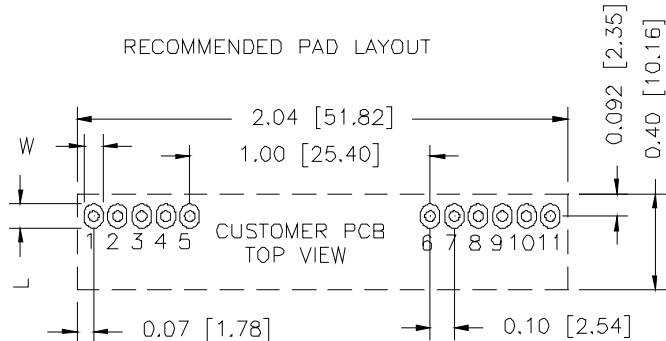

HOLE SIZE: $\varnothing 0.043 \pm 0.003$ [1.08 $\pm$ 0.08]

PAD SIZE: W 0.063 ± 0.002 [1.63 $\pm$ 0.05]

L 0.10 ± 0.004 [2.54 $\pm$ 0.10] BOTH SIDE

Pin Connections

Pin	Function
1	Vo
2	Vo
3	Vo, sense
4	Vo
5	GND
6	GND
7	Vin
8	Vin
9	SEQ
10	TRIM
11	On/Off

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 011707

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[VRBC-10A2A0G](#)