

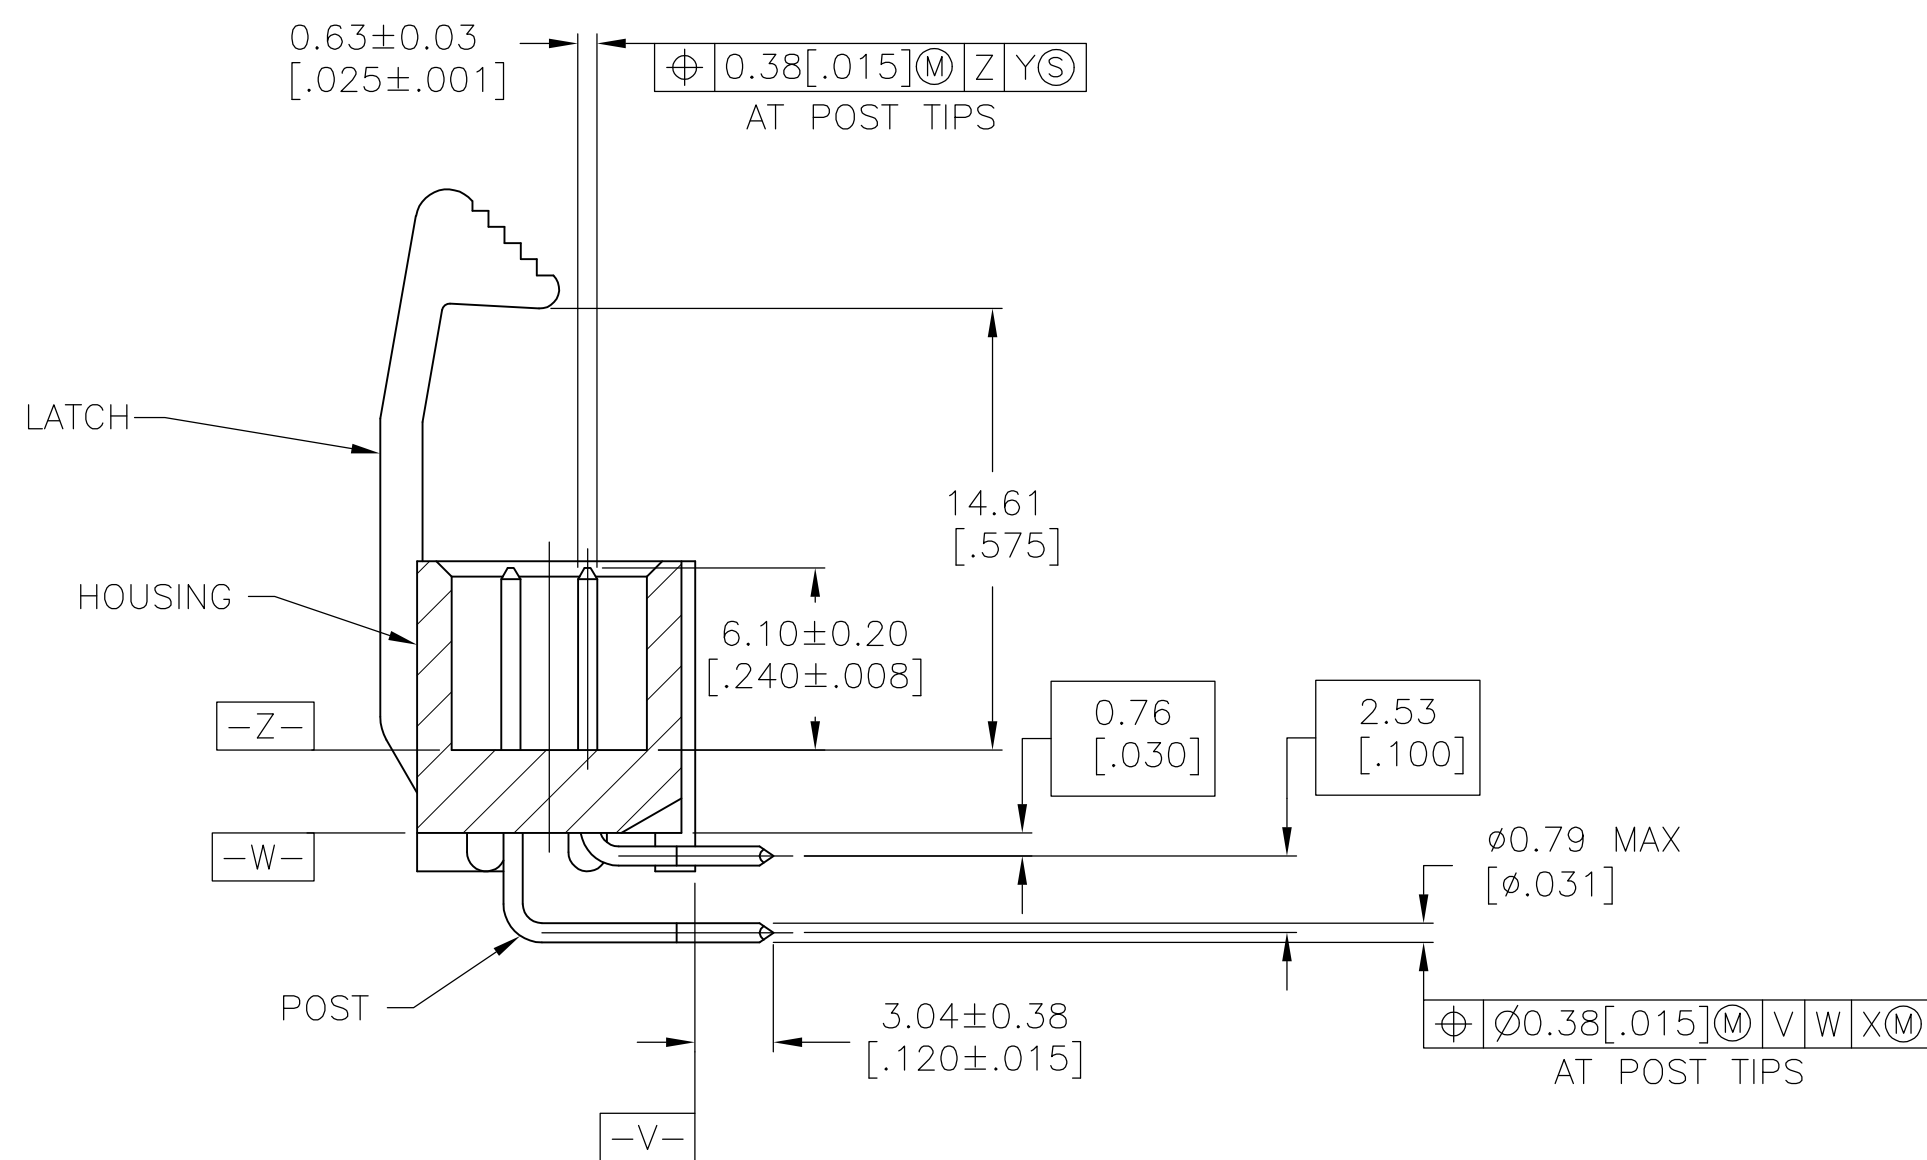
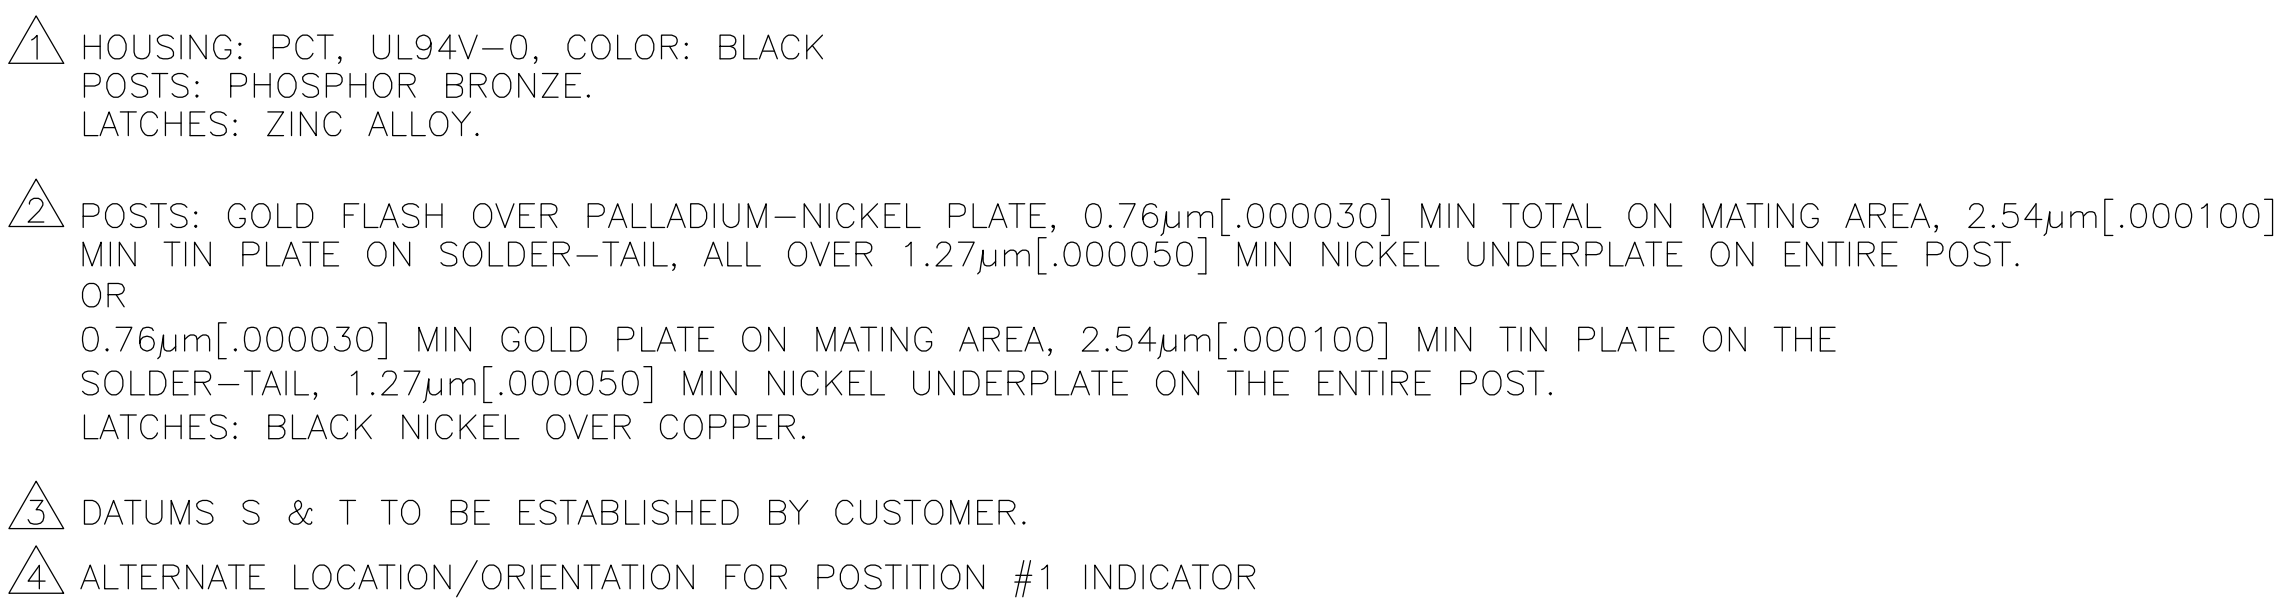



Figure 1 illustrates the dimensioning of a hole pattern. The pattern consists of 16 holes arranged in a grid. The center-to-center distance between adjacent holes is 2.54 mm. A feature control frame at the bottom center specifies a positional tolerance of 0.08 mm at Maximum Material Condition (M) relative to a datum (S) and a feature (T). Datum T is the PC BOARD EDGE, and datum S is POS #1 REF. The tolerance zone is defined by a cylindrical feature with a diameter of 0.08 mm. The hole diameter is 0.89 mm with a tolerance of +0.08 mm, and the hole depth is 0.035 mm with a tolerance of +0.003 mm. The distance from the datum T to the first hole is 2.54 mm with a tolerance of +0.100 mm.

35.56 [1.400]	14	37.59 [1.480]	43.08 [1.696]	45.72 [1.800]	30	1761720-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG. B. MCMASTER CWP. S. BOLASH APP'D. M. WALMSLEY		Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		0SEKPSD 0SEKPSD	NAME	HEADER ASSEMBLY, RIGHT ANGLE, LONG EJECT LATCH, LOW PROFILE, IDC		
		0 PLC ± -		PRODUCT SPEC	RESTRICTED TO			
		1 PLC ± -		APPLICATION SPEC				
		2 PLC ± -						
		3 PLC ± 0.13[.005]						
4 PLC ± -		ANGLES ± -		SIZE CASE CODE DRAWING NO.			RESTRICTED TO	
FINISH		WEIGHT -		A1 00779 C 1761720 -				
				CUSTOMER DRAWING				SCALE 4:1 SHEET 1 of 1 REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1761720-1](#)