
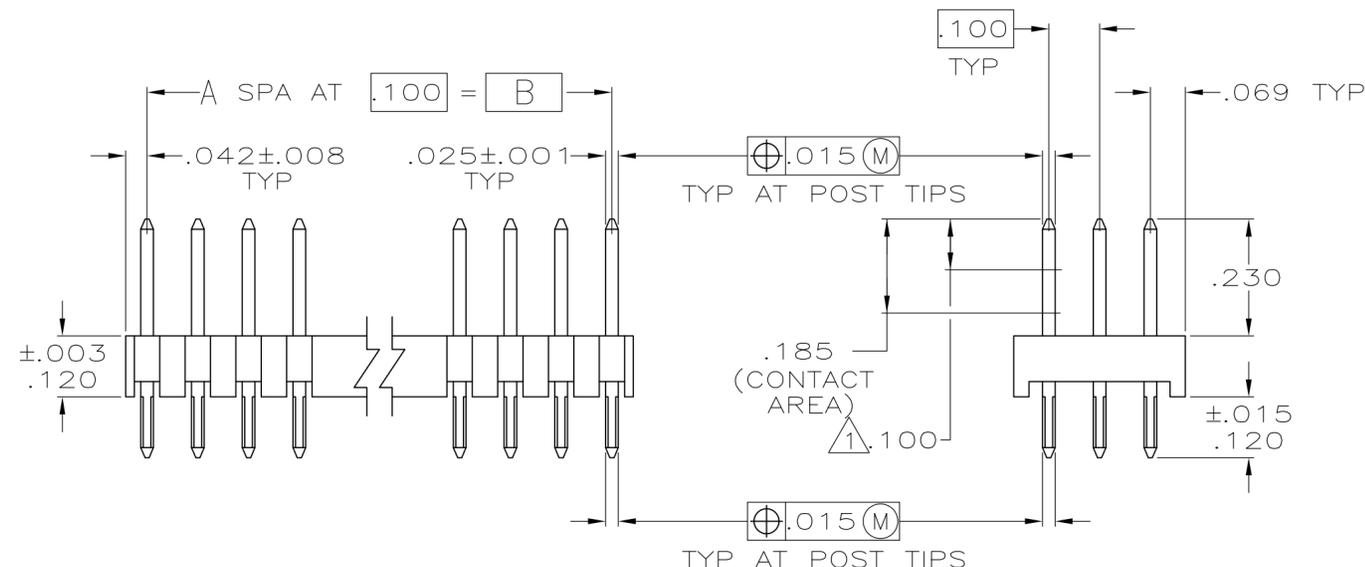


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS					
AD		39		P	LTR	DESCRIPTION	DATE	DWN	APVD
				E4		REVISED PER ECO-15-011943	19AUG2015	NK	MM

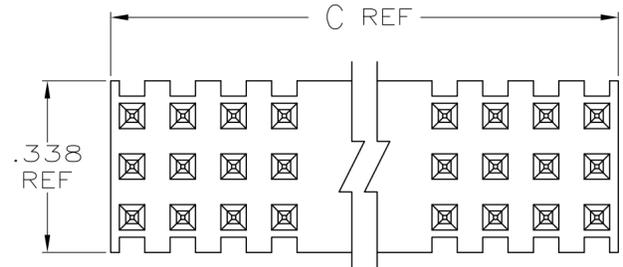

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARDS
- 3 .000030 GOLD ON THE CONTACT AREA, .000100-.000200 BRIGHT TIN-LEAD ON THE SOLDER TAIL ALL OVER .000050 NICKEL
- 4 .000030 GOLD ON THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL ALL OVER .000050 NICKEL
- 5 HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK POSTS-PHOS BRONZE
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

4	3.984	3.900	39	120	8-103817-8
	3.184	3.100	31	96	8-103817-0
	2.384	2.300	23	72	7-103817-2
	2.284	2.200	22	69	7-103817-1
	1.984	1.900	19	60	6-103817-8
	1.484	1.400	14	45	6-103817-3
	1.384	1.300	13	42	6-103817-2
	1.084	1.000	10	33	5-103817-9
	.984	.900	9	30	5-103817-8
	.884	.800	8	27	5-103817-7
	.784	.700	7	24	5-103817-6
	.684	.600	6	21	5-103817-5
	.584	.500	5	18	5-103817-4
	.484	.400	4	15	5-103817-3
	.384	.300	3	12	5-103817-2
.284	.200	2	9	5-103817-1	
FINISH	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

6	OBSOLETE	3.984	3.900	39	120	3-103817-8	
	OBSOLETE	3.884	3.800	38	117	3-103817-7	
	OBSOLETE	3.784	3.700	37	114	3-103817-6	
	OBSOLETE	3.684	3.600	36	111	3-103817-5	
	OBSOLETE	3.584	3.500	35	108	3-103817-4	
	OBSOLETE	3.484	3.400	34	105	3-103817-3	
	OBSOLETE	3.384	3.300	33	102	3-103817-2	
	OBSOLETE	3.284	3.200	32	99	3-103817-1	
	6	OBSOLETE	3.184	3.100	31	96	3-103817-0
	OBSOLETE	3.084	3.000	30	93	2-103817-9	
	OBSOLETE	2.984	2.900	29	90	2-103817-8	
	OBSOLETE	2.884	2.800	28	87	2-103817-7	
	OBSOLETE	2.784	2.700	27	84	2-103817-6	
	OBSOLETE	2.684	2.600	26	81	2-103817-5	
	OBSOLETE	2.584	2.500	25	78	2-103817-4	
OBSOLETE	2.484	2.400	24	75	2-103817-3		
6	OBSOLETE	2.384	2.300	23	72	2-103817-2	
6	OBSOLETE	2.284	2.200	22	69	2-103817-1	
OBSOLETE	2.184	2.100	21	66	2-103817-0		
OBSOLETE	2.084	2.000	20	63	1-103817-9		
6	OBSOLETE	1.984	1.900	19	60	1-103817-8	
OBSOLETE	1.884	1.800	18	57	1-103817-7		
OBSOLETE	1.784	1.700	17	54	1-103817-6		
OBSOLETE	1.684	1.600	16	51	1-103817-5		
OBSOLETE	1.584	1.500	15	48	1-103817-4		
6	OBSOLETE	1.484	1.400	14	45	1-103817-3	
6	OBSOLETE	1.384	1.300	13	42	1-103817-2	
OBSOLETE	1.284	1.200	12	39	1-103817-1		
OBSOLETE	1.184	1.100	11	36	1-103817-0		
6	OBSOLETE	1.084	1.000	10	33	1-103817-9	
OBSOLETE	.984	.900	9	30	1-103817-8		
6	OBSOLETE	.884	.800	8	27	1-103817-7	
OBSOLETE	.784	.700	7	24	1-103817-6		
OBSOLETE	.684	.600	6	21	1-103817-5		
OBSOLETE	.584	.500	5	18	1-103817-4		
6	OBSOLETE	.484	.400	4	15	1-103817-3	
OBSOLETE	.384	.300	3	12	1-103817-2		
OBSOLETE	.284	.200	2	9	1-103817-1		
FINISH	C	B	A	NO OF POS	ASSEMBLY PART NUMBER		

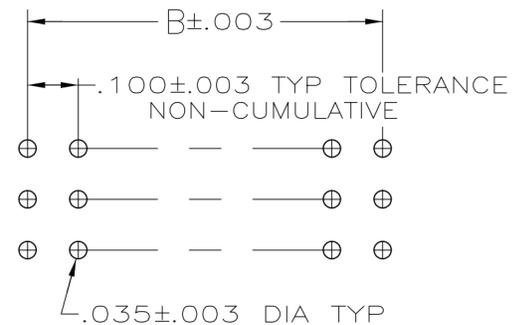

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN K HELM 1-22-91	TE Connectivity
		CHK R. FEIDT 1-22-91	
		APVD -	ASSEMBLY, MOD II, HEADER, TRIPLE ROW, .100X.100X.100
		PRODUCT SPEC -	
		APPLICATION SPEC -	SIZE A2
MATERIAL 5	FINISH SEE TABLE	WEIGHT -	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C-103817
			RESTRICTED TO -
			SCALE 1:1 SHEET 1 OF 1 REV E4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103817-2](#)