

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT

 $\Theta_Y =$

ALL RIGHTS RESERVED

LOC
GP

DIST
00

REVISIONS

P	LTR
---	-----

LTR

DESCRIPTION

DATE _____

DWN

	APVE
--	------





G1

REVISID PER ECR-15-007038

28SEP2

5	NK
---	----

	PQ
--	----

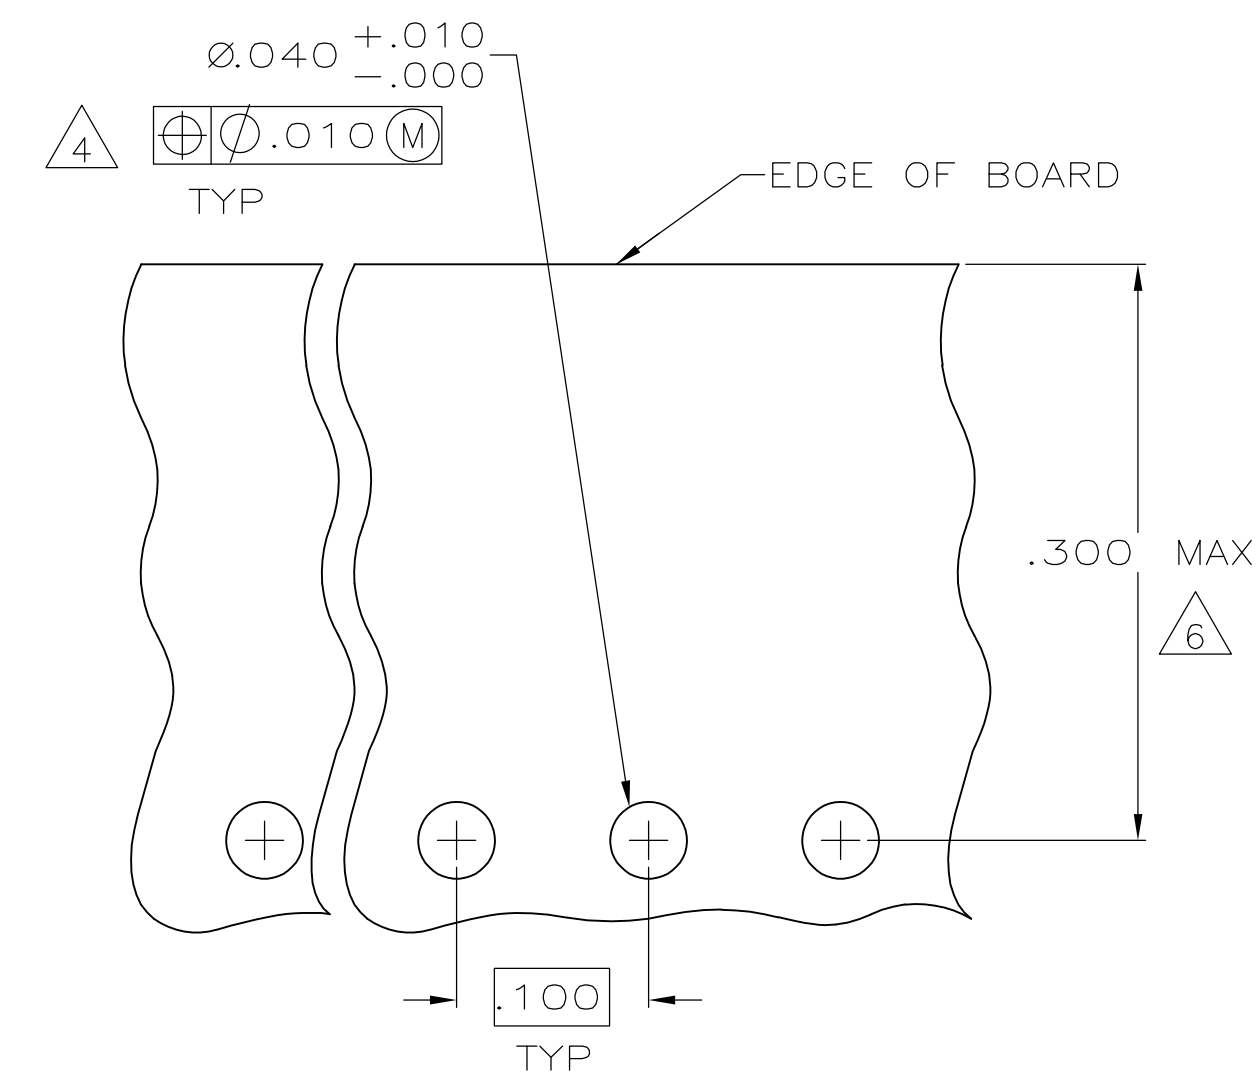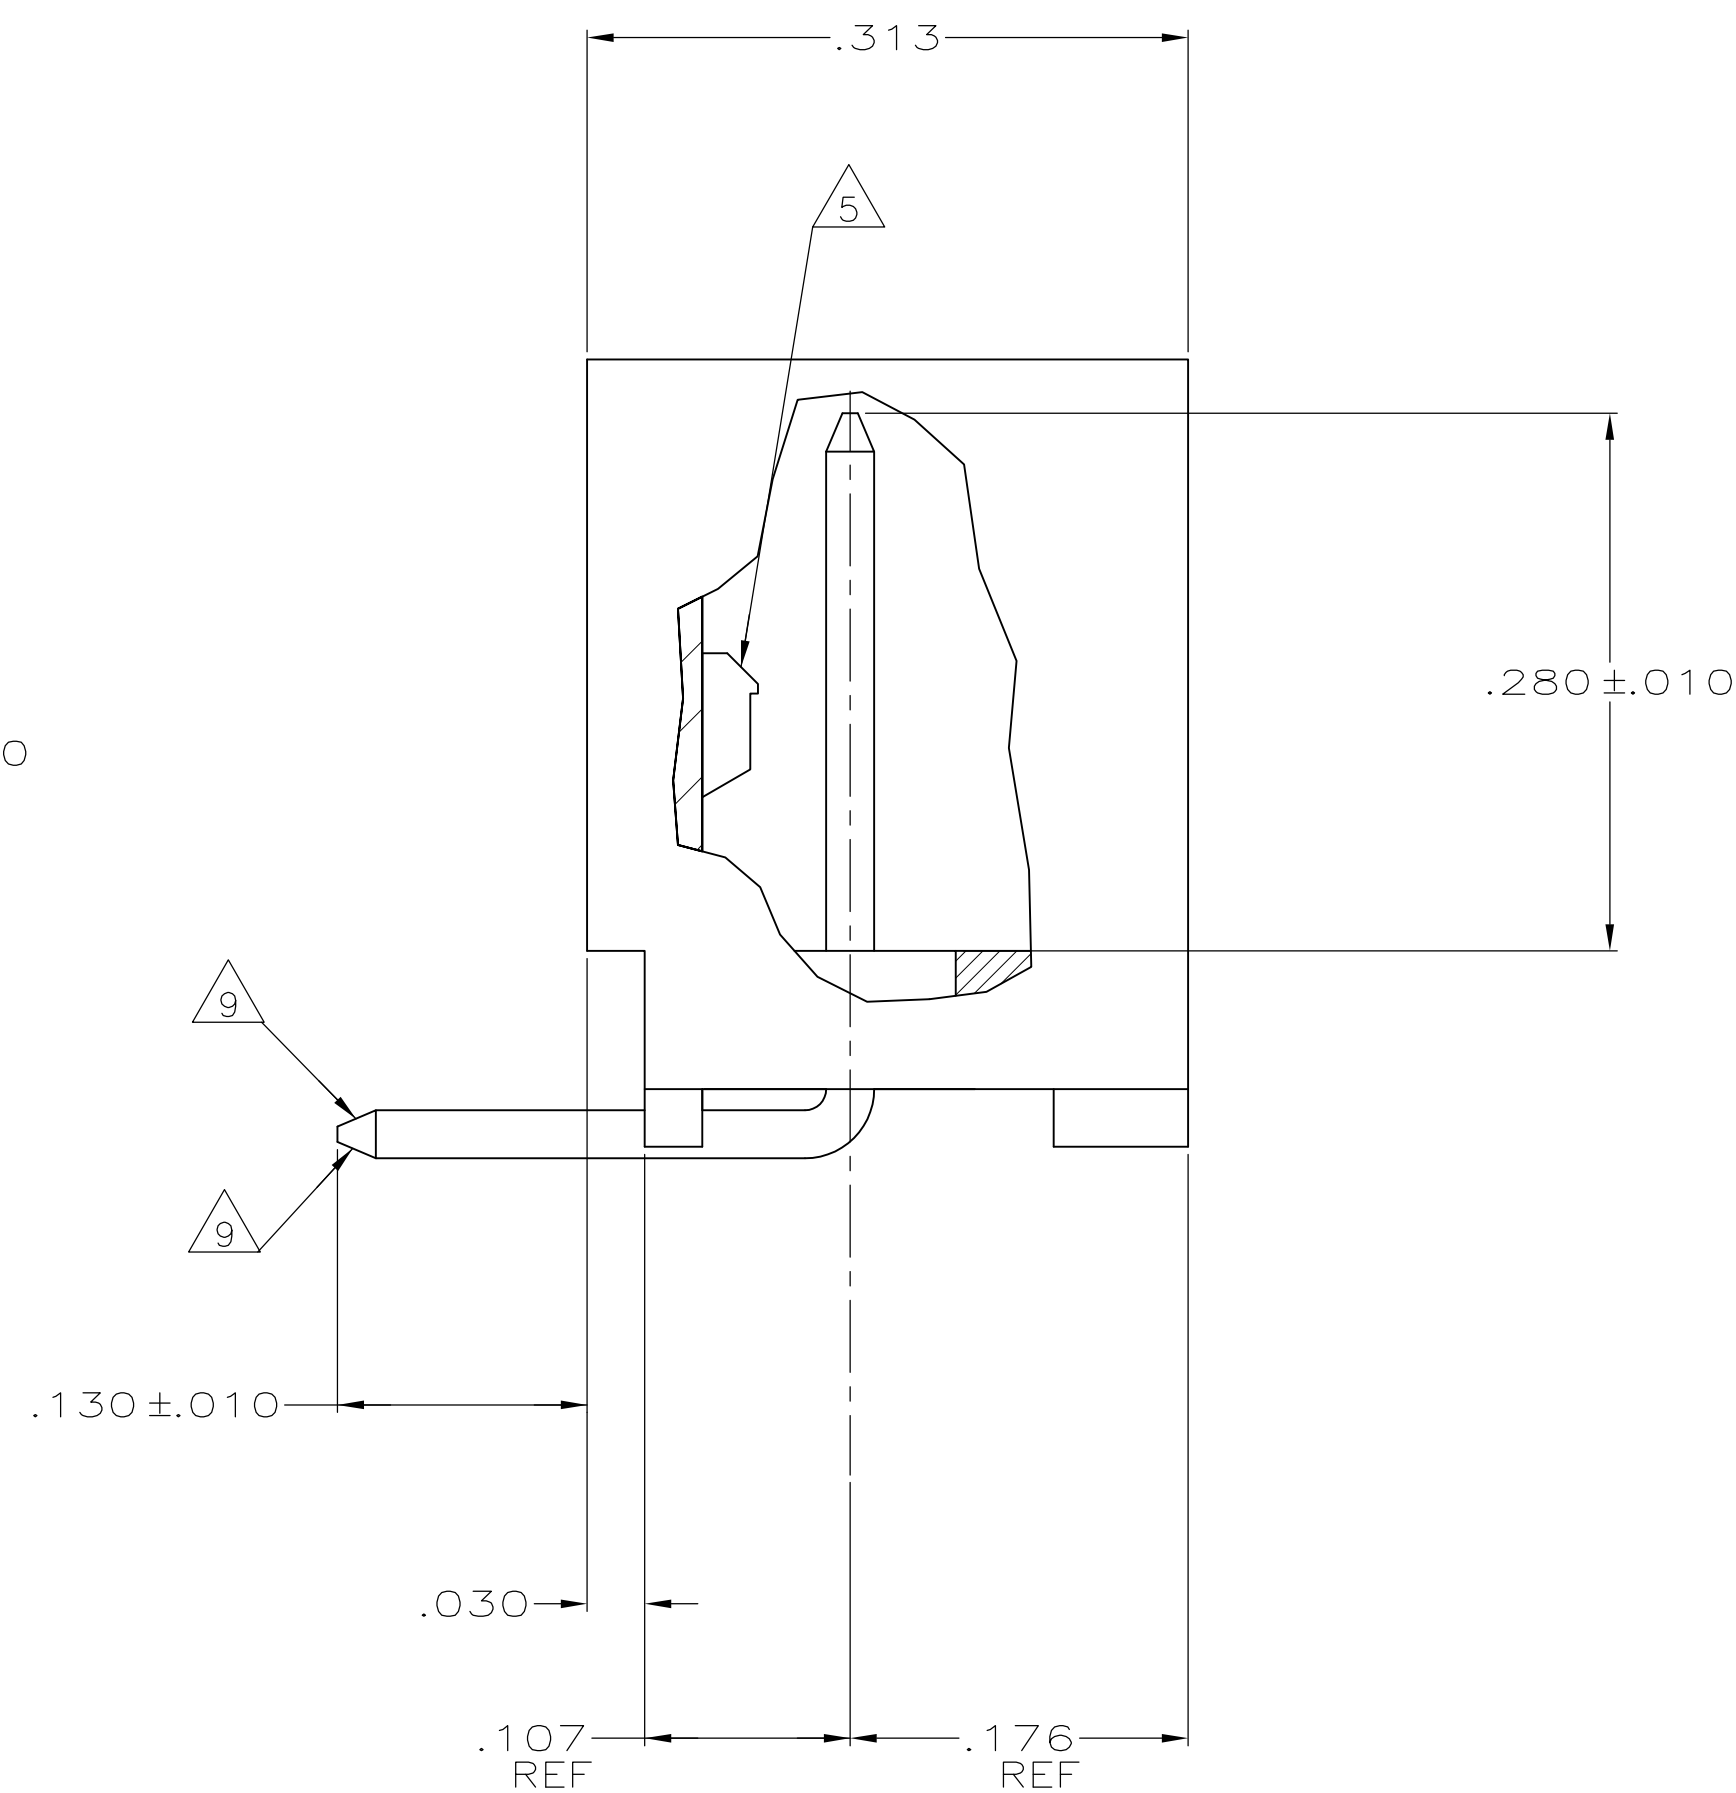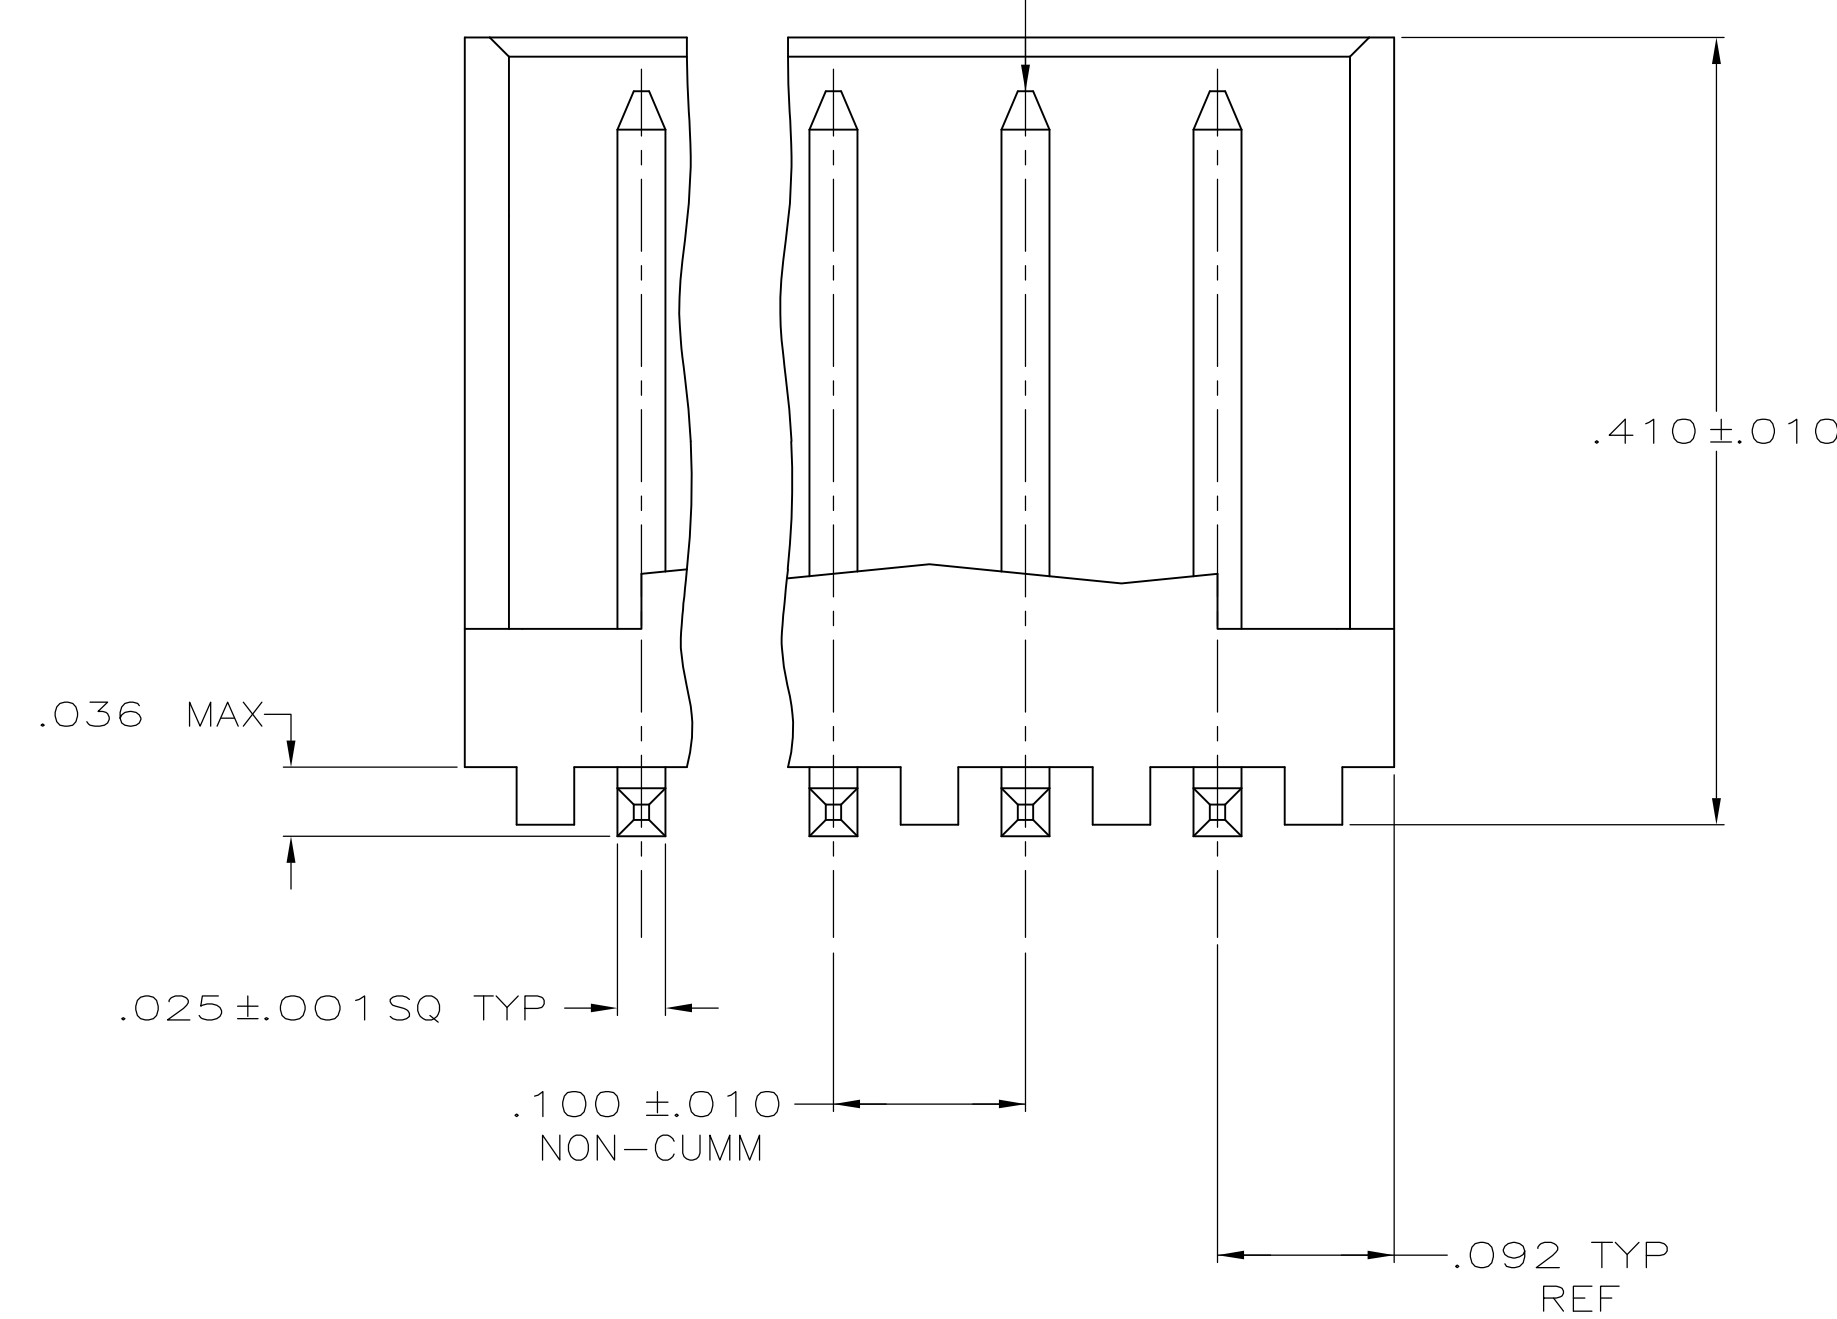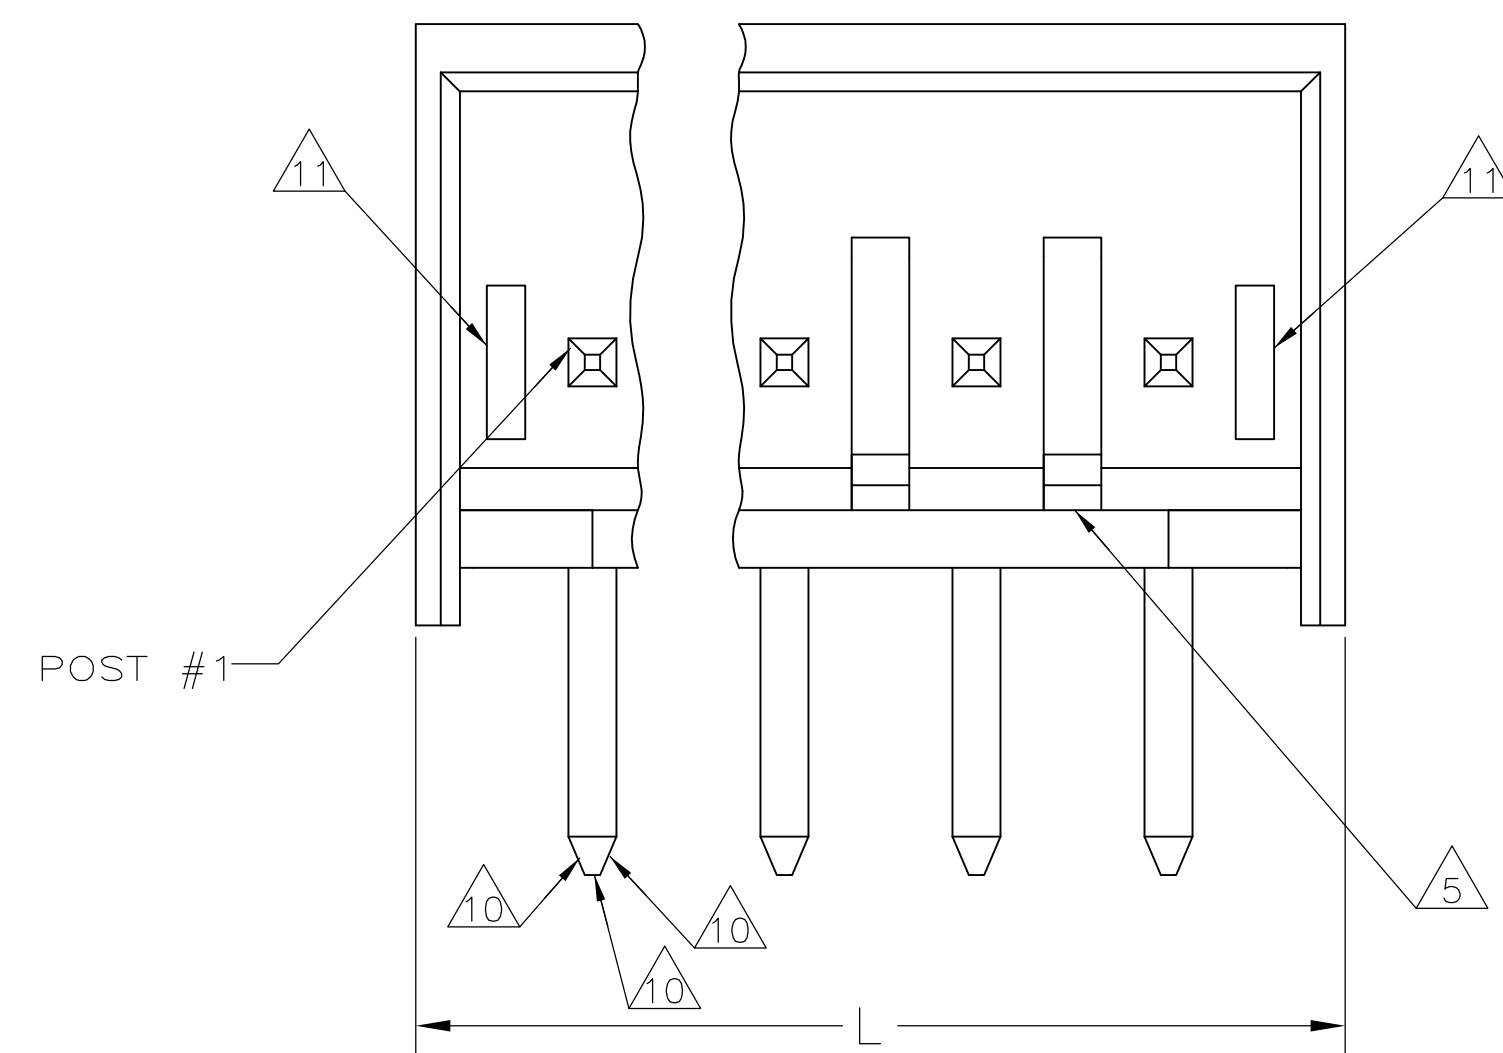

RECOMMENDED MOUNTING HOLE PATTERN 
FOR .063 THK PRINTED CIRCUIT BOARD

1.484	37.69	14	4-644894-4
1.384	35.15	13	4-644894-3
1.284	32.61	12	4-644894-2
1.184	30.07	11	4-644894-1
1.084	27.53	10	4-644894-0
.984	24.99	9	3-644894-9
.884	22.45	8	3-644894-8
.784	19.91	7	3-644894-7
.684	17.37	6	3-644894-6
.584	14.83	5	3-644894-5
.484	12.29	4	3-644894-4
.384	9.75	3	3-644894-3
.284	7.21	2	3-644894-2

1.484	37.69	14	-1-644894-4-
1.384	35.15	13	-1-644894-3-
1.284	32.61	12	-1-644894-2-
1.184	30.07	11	-1-644894-1-
1.084	27.53	10	-1-644894-0-
.984	24.99	9	-644894-9-
.884	22.45	8	-644894-8-
.784	19.91	7	-644894-7-
.684	17.37	6	-644894-6-
.584	14.83	5	-644894-5-
.484	12.29	4	-644894-4-
.384	9.75	3	-644894-3-
.284	7.21	2	-644894-2-

IN	MM	NO OF POSITIONS	PART NUMBER
L		HEADER ASSEMBLY	

.030	0.76	.107	2.72	—	—
.025	0.64	.100	2.54	—	—
.010	0.25	.092	2.34	.410	10.41
.005	0.13	.063	1.60	.313	7.95
.001	0.03	.040	1.02	.300	7.62
.000350	0.00889	.036	0.91	.280	7.11
.000150	0.00381	.035	0.89	.176	4.47
.000	0.00	.032	0.81	.130	3.30
IN	MM	IN	MM	IN	MM

CONVERSION TABLE

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 25JUNE2005 OK D. BOSSI 25JUNE2005 APVD D. BOSSI 25JUNE2005		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. — 1 PLC ±. — 2 PLC ±. — 3 PLC ±. .005 4 PLC ±. — 5 ANGLES FINISH ±. —		NAME CST-100 SHROUDED HEADER ASSEMBLY, FRICTION LOCK, RIGHT ANGLE POST, TIN OR TIN LEAD PLATED	
MATERIAL 		WEIGHT —		SIZE A1	
		CUSTOMER DRAWING		SCALE 10:1	
				SHEET 1 OF 1	
				REV C1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-644894-4](#)