

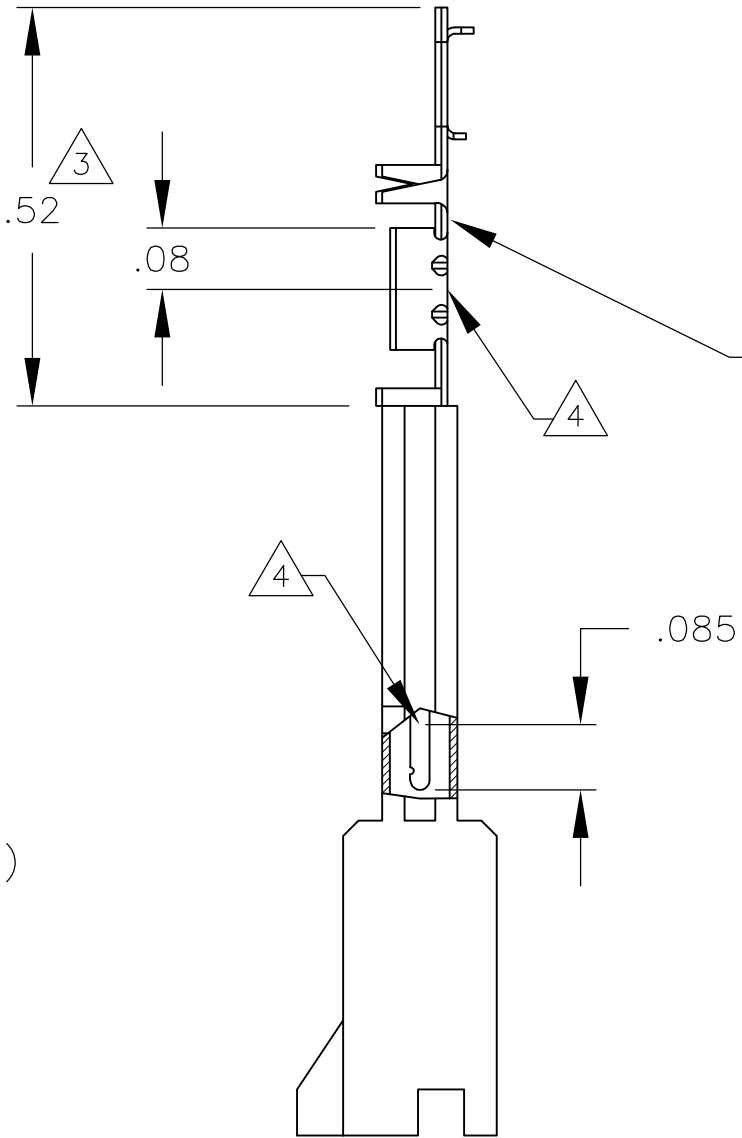


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		K2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

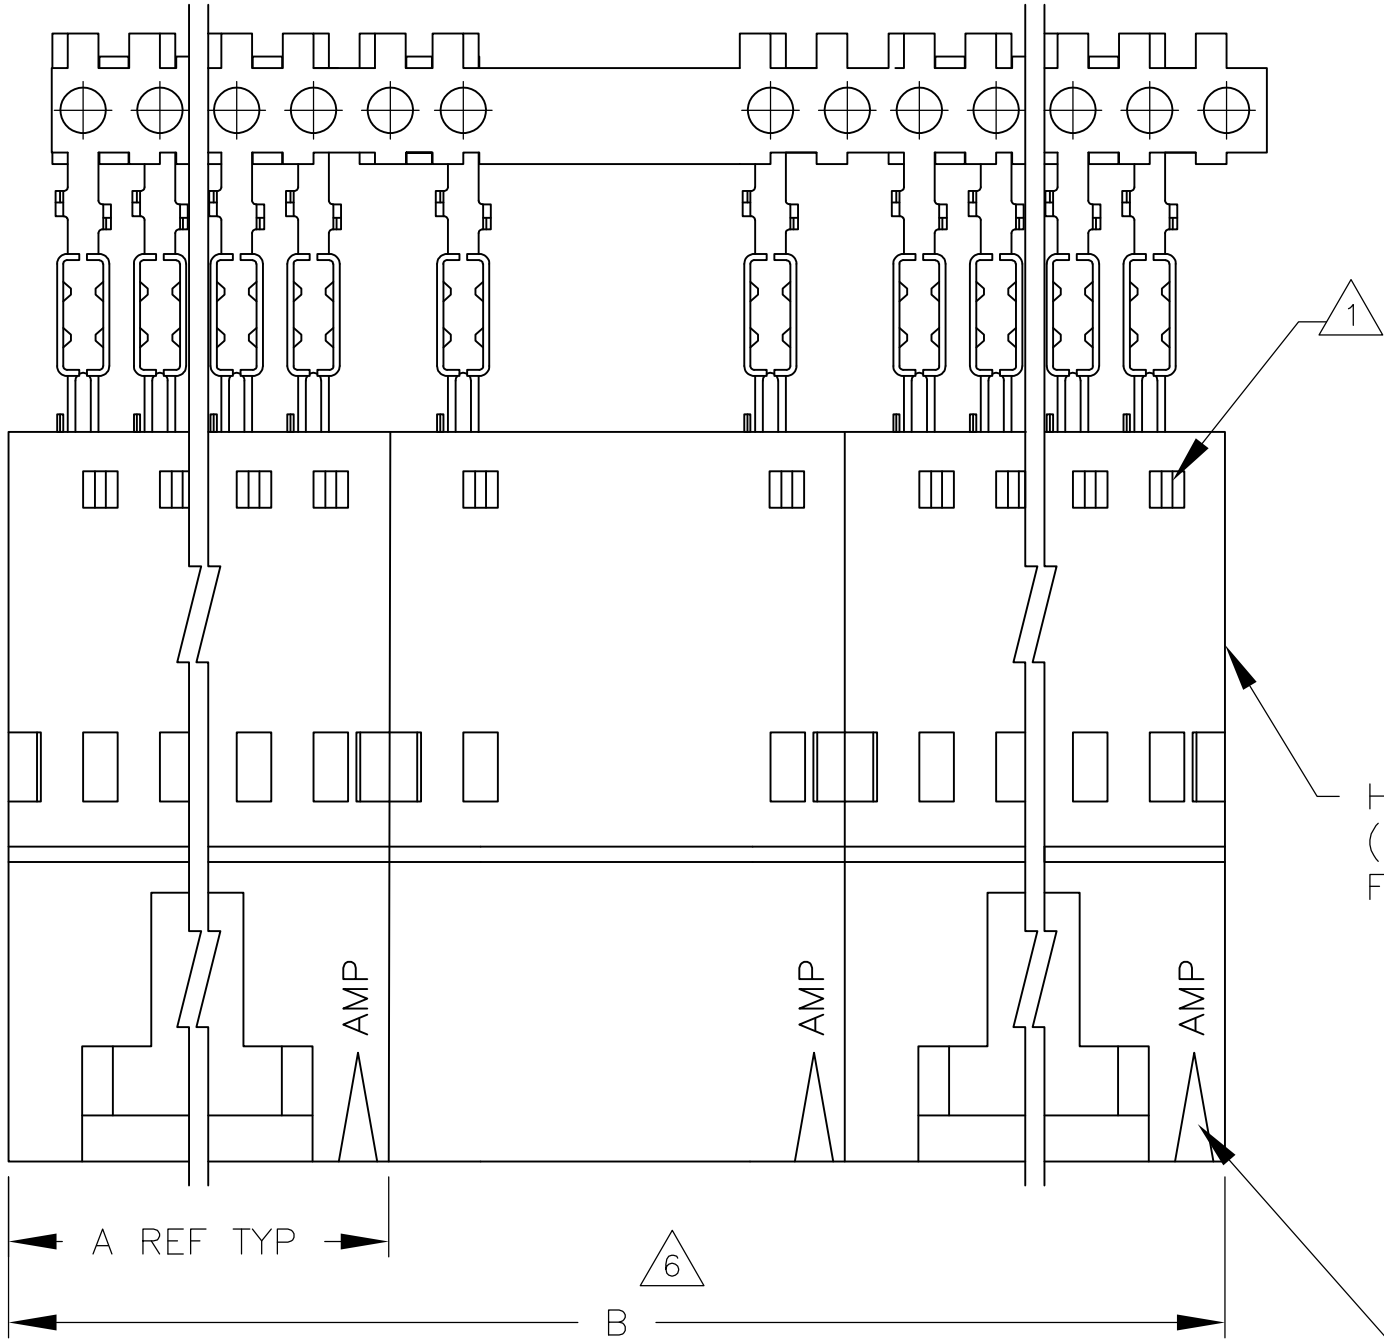

HOUSING
(SEE TABLE
FOR PART NO.)

POSITION #1 INDICATOR

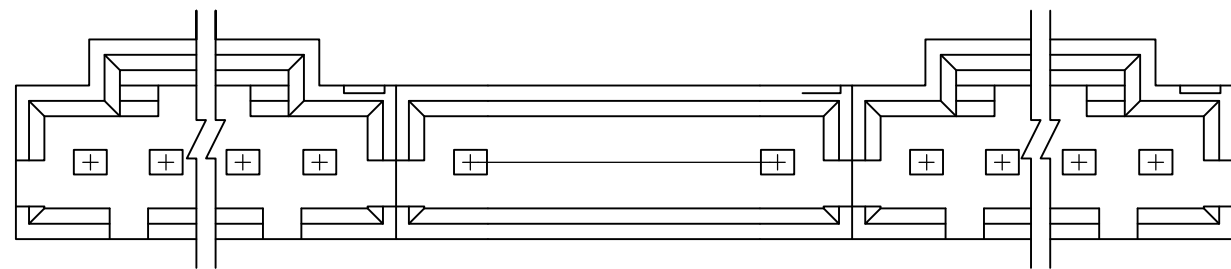

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103893
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK, PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 9 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- 10 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 11 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.

12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12	OBSOLETE		2	2.59	1.295	1-103653-1	12	6-103946-1
			2	2.39	1.195	1-103653-0	1 1	6-103946-0
			2	2.19	1.095	103653-9	10	5-103946-9
			2	1.99	.995	103653-8	9	5-103946-8
			2	1.79	.895	103653-7	8	5-103946-7
			3	2.39	.795	103653-6	7	5-103946-6
			2	1.39	.695	103653-5	6	5-103946-5
			4	2.38	.595	103653-4	5	5-103946-4
			4	1.98	.495	103653-3	4	5-103946-3
			5	1.98	.395	103653-2	3	5-103946-2
			8	2.36	.295	103653-1	2	5-103946-1
			8	2.36	.295	103653-1	2	1-103946-2
12	OBSOLETE		2	2.59	1.295	1-103653-1	12	1-103946-1
			2	2.39	1.195	1-103653-0	1 1	1-103946-0
			2	2.19	1.095	103653-9	10	103946-9
			2	1.99	.995	103653-8	9	103946-8
			2	1.79	.895	103653-7	8	103946-7
			3	2.39	.795	103653-6	7	103946-6
			2	1.39	.695	103653-5	6	103946-5
			4	2.38	.595	103653-4	5	103946-4
			4	1.98	.495	103653-3	4	103946-3
			5	1.98	.395	103653-2	3	103946-2
			8	2.36	.295	103653-1	2	103946-1
		PLATING			B	A	HOUSING PART NUMBER	NO OF POSN

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	R BROWN	26JUL00	TE Connectivity		
				CHK	K WRIGHT	26JUL00			
				APVD	K WRIGHT	26JUL00	NAME		
				PRODUCT SPEC			SHROUDED PIN ASSY, AMPMODU MTE, SINGLE ROW,		
				APPLICATION SPEC			.100 CL, POLARIZED, W/ LATCH WINDOWS,		
				114-25026			FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM		
				WEIGHT			SIZE	CAGE CODE	DRAWING NO
				-			A2	00779	C=103946
				CUSTOMER DRAWING			SCALE		SHEET
				4:1			1 of 1		REV
									K2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103946-8](#)