



ALTERNATE MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED
WITH 0.0008 MINIMUM THICK BRIGHT TIN (ELV COMPLIANT).

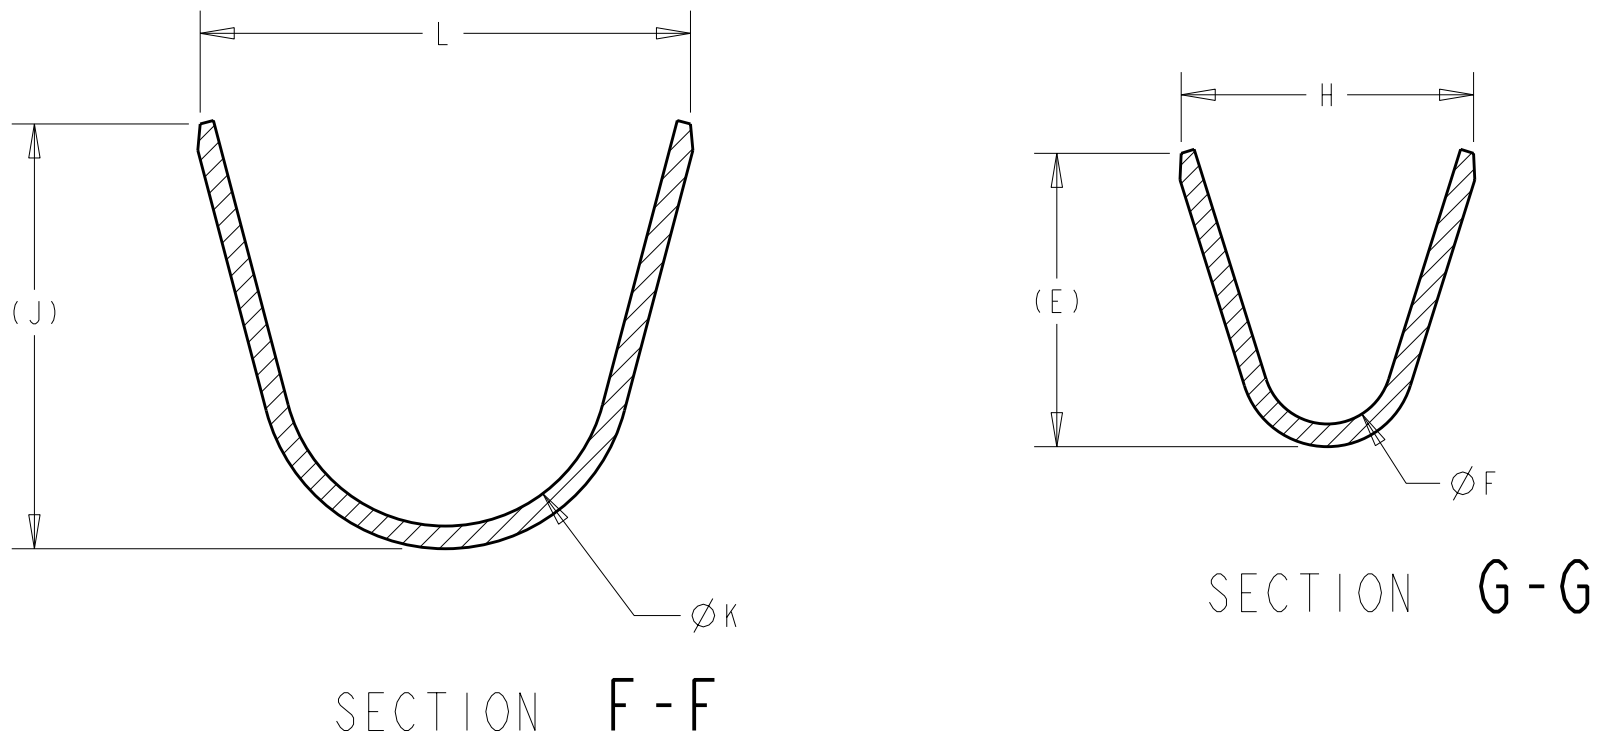

NOT RELEASED		FIG 2	-							12 AWG	1-776546-2
RELEASED			776546-5 REELED FOR AMP APPLICATORS							14 AWG	1-776546-1
NOT RELEASED			-							16 AWG	1-776546-0
NOT RELEASED			-							18 AWG	776546-9
NOT RELEASED			-							20 AWG	776546-8
RELEASED			776546-1 REELED FOR AMP APPLICATORS							22 AWG	776546-7
NOT RELEASED		FIG 1	1.35	6.8	4.30	6.09	4.7	2.70	5.25	12 AWG	776546-6
RELEASED			1.35	6.5	4.30	5.62	3.9	1.70	3.88	14 AWG	776546-5
NOT RELEASED			1.10	5.6	3.80	4.54	3.9	1.70	3.88	16 AWG	776546-4
NOT RELEASED			1.10	5.6	3.80	4.54	3.3	1.30	2.76	18 AWG	776546-3
NOT RELEASED			0.90	5.0	3.40	4.11	3.3	1.30	2.76	20 AWG	776546-2
RELEASED			0.90	5.0	3.40	4.11	2.5	0.90	2.11	22 AWG	776546-1
STATUS	LUBRICANT	REELING	N	L	ØK	J	H	ØF	E	WIRE SIZE	PART NUMBER

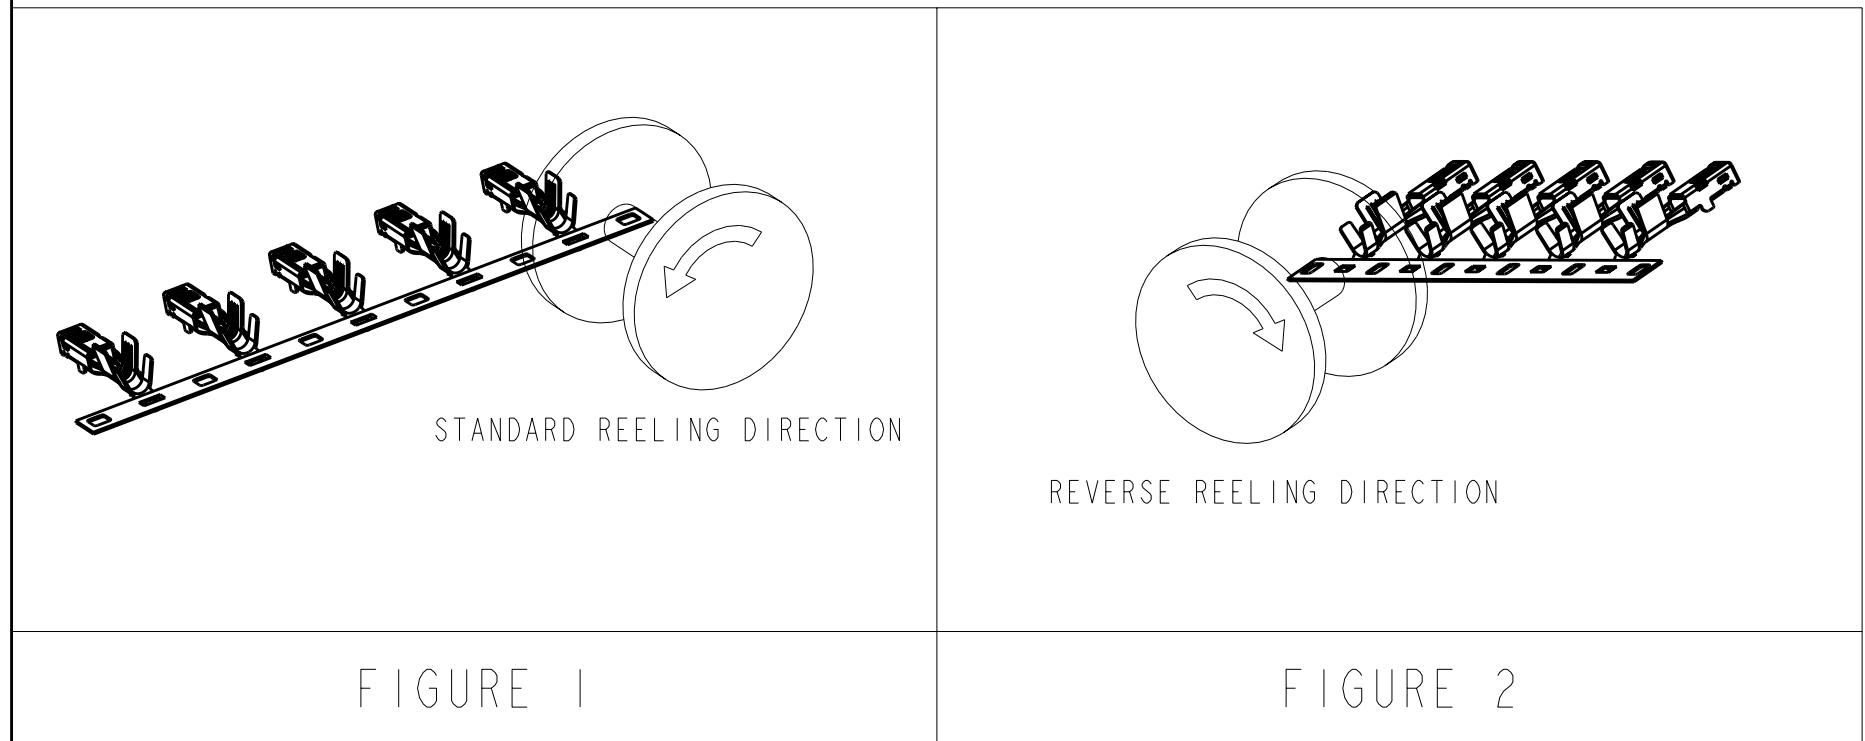

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-776546-1](#) [776546-1](#) [776546-7](#)