

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		- , N/A .	
© COPYRIGHT		N/A		BY TYCO ELECTRONICS CORPORATION.	
ALL RIGHTS RESERVED.					
PART NO.	A	△1	B	REMARKS	
839564-1	12.00	[304.8]	.38 [9.7]	△5	
839564-2	24.00	[609.6]	.38 [9.7]	△5	
839564-3	4.50	[114.3]	.38 [9.7]	△5	
839564-4	6.50	[165.1]	.38 [9.7]	△5	
839564-5	18.00	[457.2]	—		OBSOLETE
839564-6	17.00	[431.8]	—		OBSOLETE
839564-7	15.00	[381.0]	.38 [9.7]	△5	
839564-8	60.00	[1524.0]	—		
839564-9	120.00	[3048.0]	.38 [9.7]	△5	OBSOLETE
1-839564-0	96.00	[2438.4]	.38 [9.7]	△5	OBSOLETE
1-839564-1	144.00	[3657.6]	.38 [9.7]	△5	
1-839564-2	300.00	[7620.0]	.38 [9.7]	△5	OBSOLETE
1-839564-3	48.00	[1219.2]	.38 [9.7]	△5	
1-839564-4	72.00	[1828.8]	.38 [9.7]	△5	
1-839564-5	1575.00	[40005.0]	.38 [9.7]	△5	OBSOLETE
1-839564-6	420.00	[10668.0]	.38 [9.7]	△5	OBSOLETE
1-839564-7	118.00	[2997.2]	.38 [9.7]	△5	
1-839564-8	6.00	[152.4]	.38 [9.7]	△5	
1-839564-9	36.00	[914.4]	.38 [9.7]	△5	
2-839564-0	240.00	[6096.0]	.38 [9.7]	△5	
2-839564-1	394.00	[10007.6]	.38 [9.7]	△5	
2-839564-2	984.00	[24993.6]	.38 [9.7]	△5	OBSOLETE
2-839564-3	19.00	[482.6]	.38 [9.7]	△5	OBSOLETE
2-839564-4	10.00	[254.0]	.38 [9.7]	△5	OBSOLETE
2-839564-5	108.00	[2743.2]	.38 [9.7]	△5	OBSOLETE
2-839564-6	78.75	[2000.2]	.38 [9.7]	△5	
2-839564-7	35.00	[889.0]	.38 [9.7]	△5	OBSOLETE
2-839564-8	30.00	[762.0]	.38 [9.7]	△5	OBSOLETE
2-839564-9	18.00	[457.2]	.38 [9.7]	△5	
3-839564-0	88.12	[2238.2]	.38 [9.7]	△5	
3-839564-1	40.00	[1016.0]	.38 [9.7]	△5	
3-839564-2	600.00	[15240.0]	.38 [9.7]	△5	OBSOLETE
3-839564-3	157.50	[4000.5]	.38 [9.7]	△5	
3-839564-4	196.88	[5000.8]	.38 [9.7]	△5	
3-839564-5	37.40	[950.0]	.38 [9.7]	△5	OBSOLETE
3-839564-6	16.00	[406.4]	.38 [9.7]	△5	
3-839564-7	20.00	[508.0]	.38 [9.7]	△5	
5-839564-1	12.00	[304.8]	.38 [9.7]	△6	
5-839564-2	24.00	[609.6]	.38 [9.7]	△6	
5-839564-7	15.00	[381.0]	.38 [9.7]	△6	
6-839564-3	48.00	[1219.2]	.38 [9.7]	△6	
6-839564-7	118.00	[2997.2]	.38 [9.7]	△6	
6-839564-9	36.00	[914.4]	.38 [9.7]	△6	
7-839564-0	240.00	[6096.0]	.38 [9.7]	△6	
7-839564-1	394.00	[10007.6]	.38 [9.7]	△6	
7-839564-6	78.75	[2000.2]	.38 [9.7]	△6	
8-839564-0	88.12	[2238.2]	.38 [9.7]	△6	
8-839564-1	40.00	[1016.0]	.38 [9.7]	△6	
8-839564-3	157.50	[4000.5]	.38 [9.7]	△6	
8-839564-4	196.88	[5000.8]	.38 [9.7]	△6	

A


D

C

B

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
DF	S0		AC	REVISED PER ECO-08-026029	13NOV08	CT
						SG

- △1 TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [3.0]
24 INCHES [609.6] & UP = ±1%
- 2 MARKED PER MIL-STD-130.
- 3 TO MATE WITH AMP LGH-2
RECEPTACLE WITH 1.43 [36.3] BARREL DEPTH.
- 4 OPERATING VOLTAGE: 30 KVDC AT 0 TO 70,000 FEET,
-55°C TO +125°C.
- △5 PIGTAIL IS SOLDER DIPPED.
- △6 INSULATION CUT, BUT NOT REMOVED.

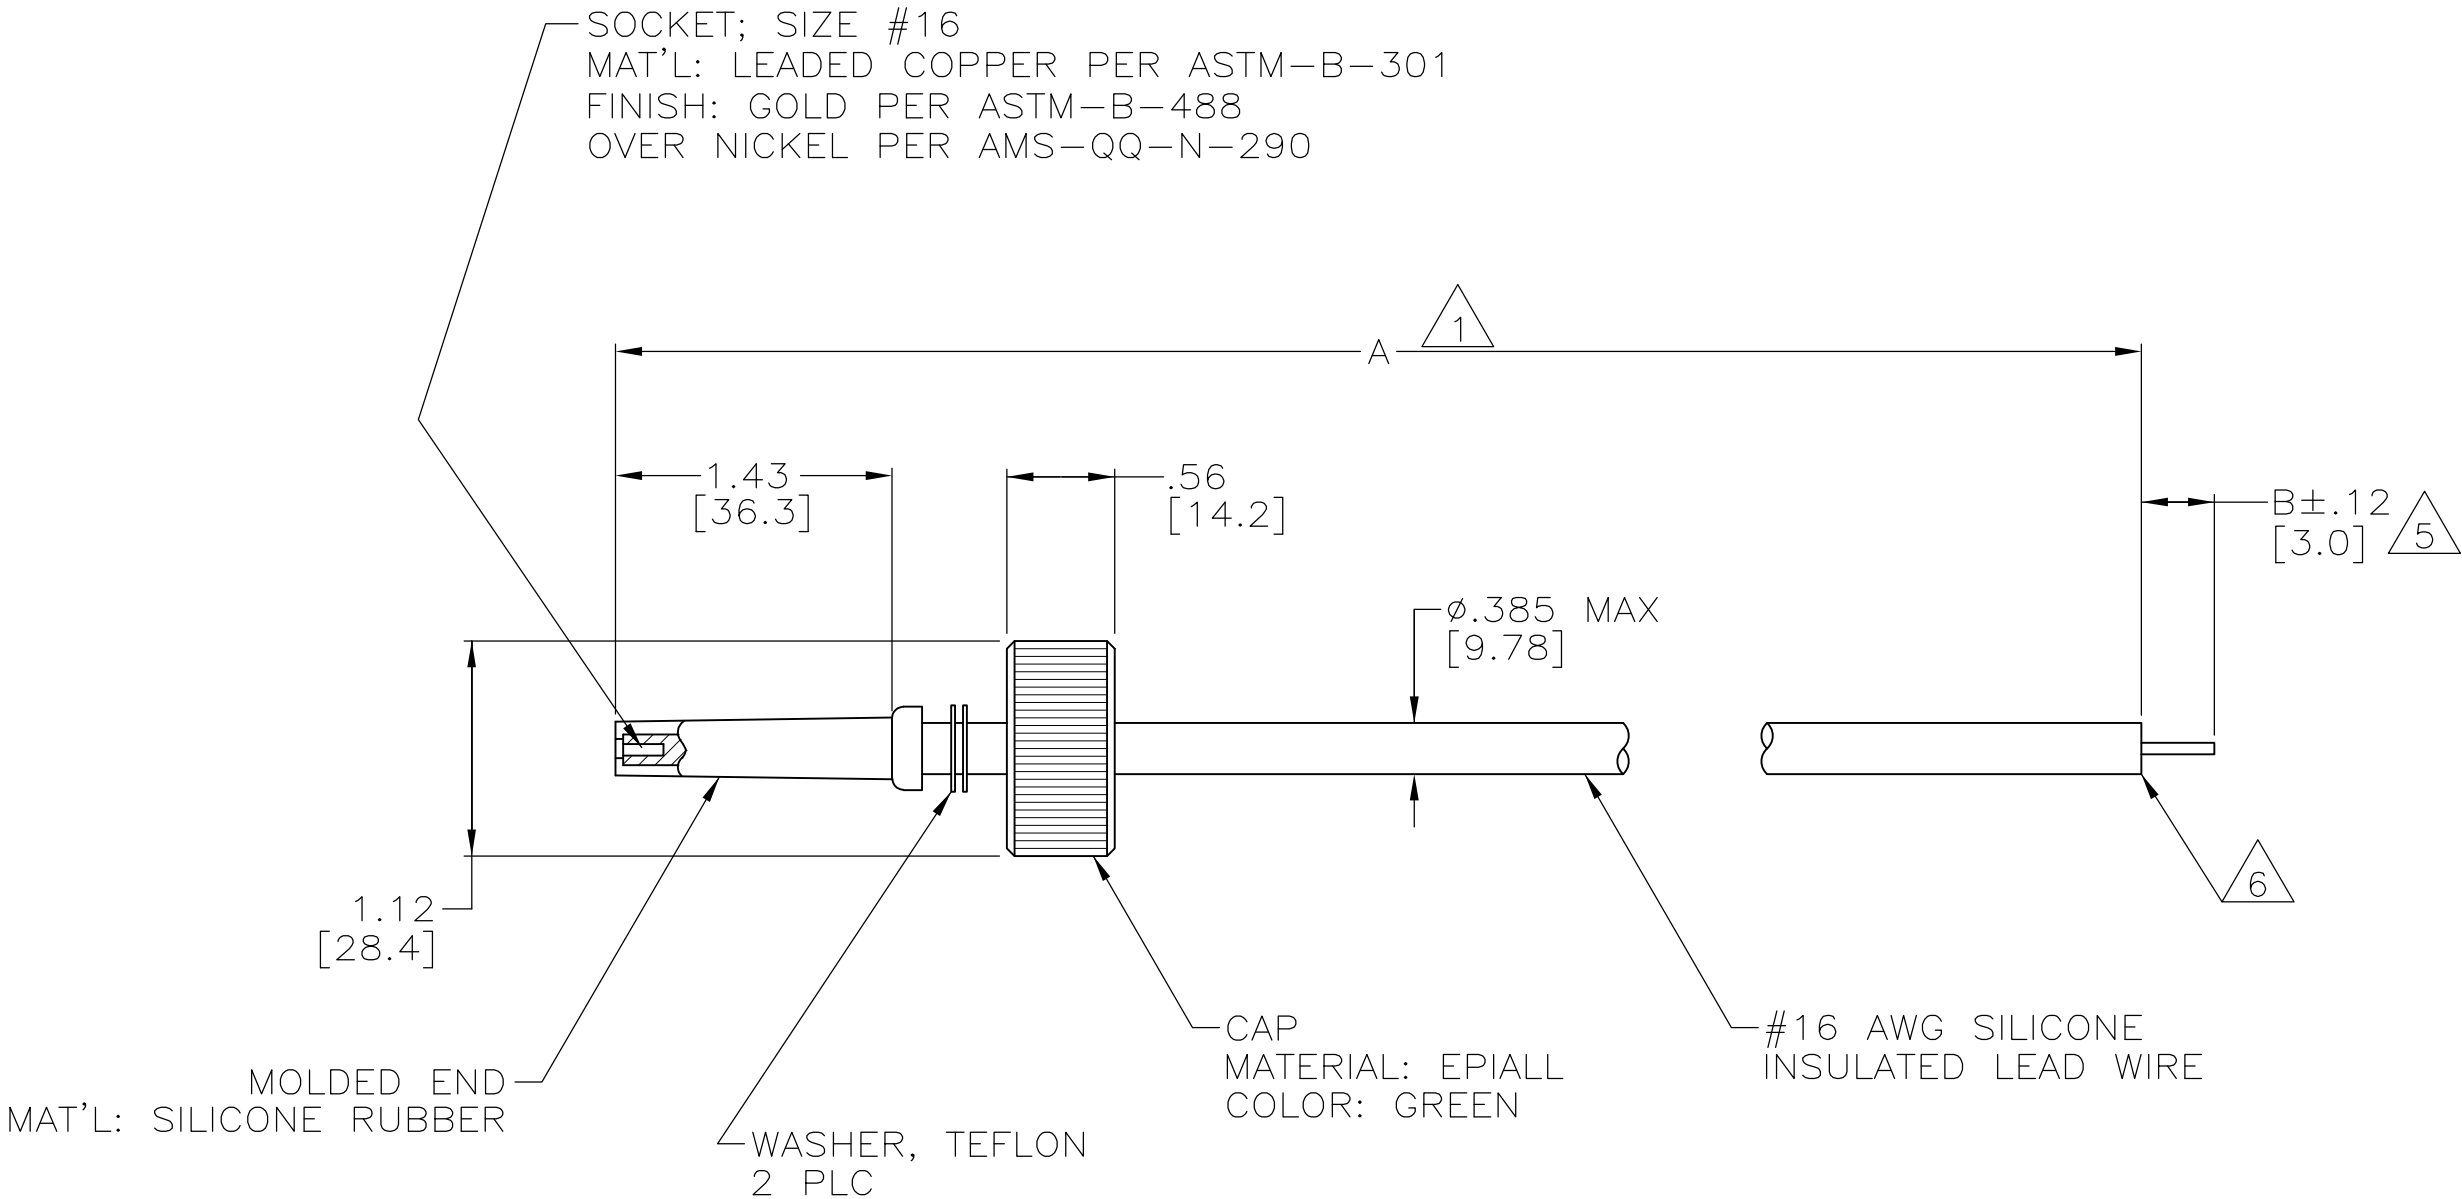

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15-FEB-93	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK	16-FEB-93		
		APVD	16-FEB-93	NAME	
		PRODUCT SPEC			
		APPLICATION SPEC		SIZE	
		WEIGHT			
		CUSTOMER DRAWING		SCALE	
				SHEET	
				REV	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-839564-0](#)