
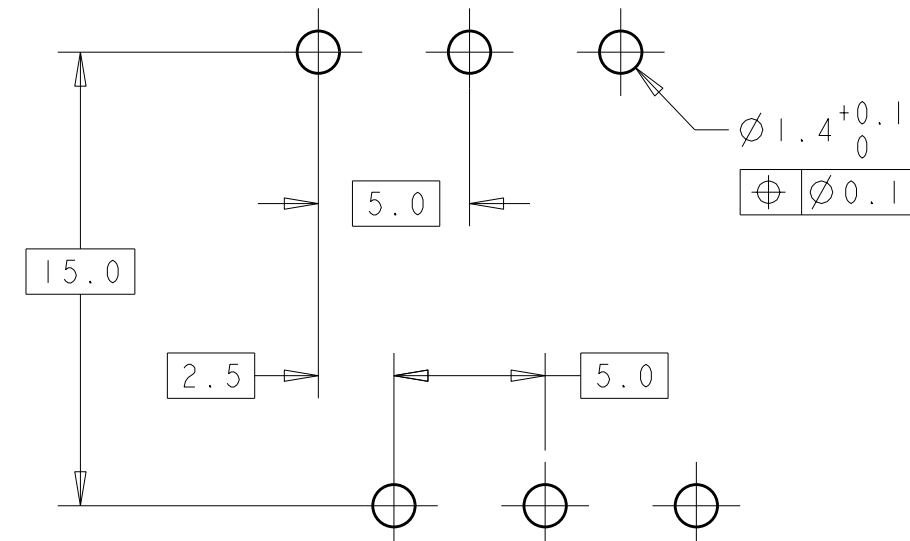
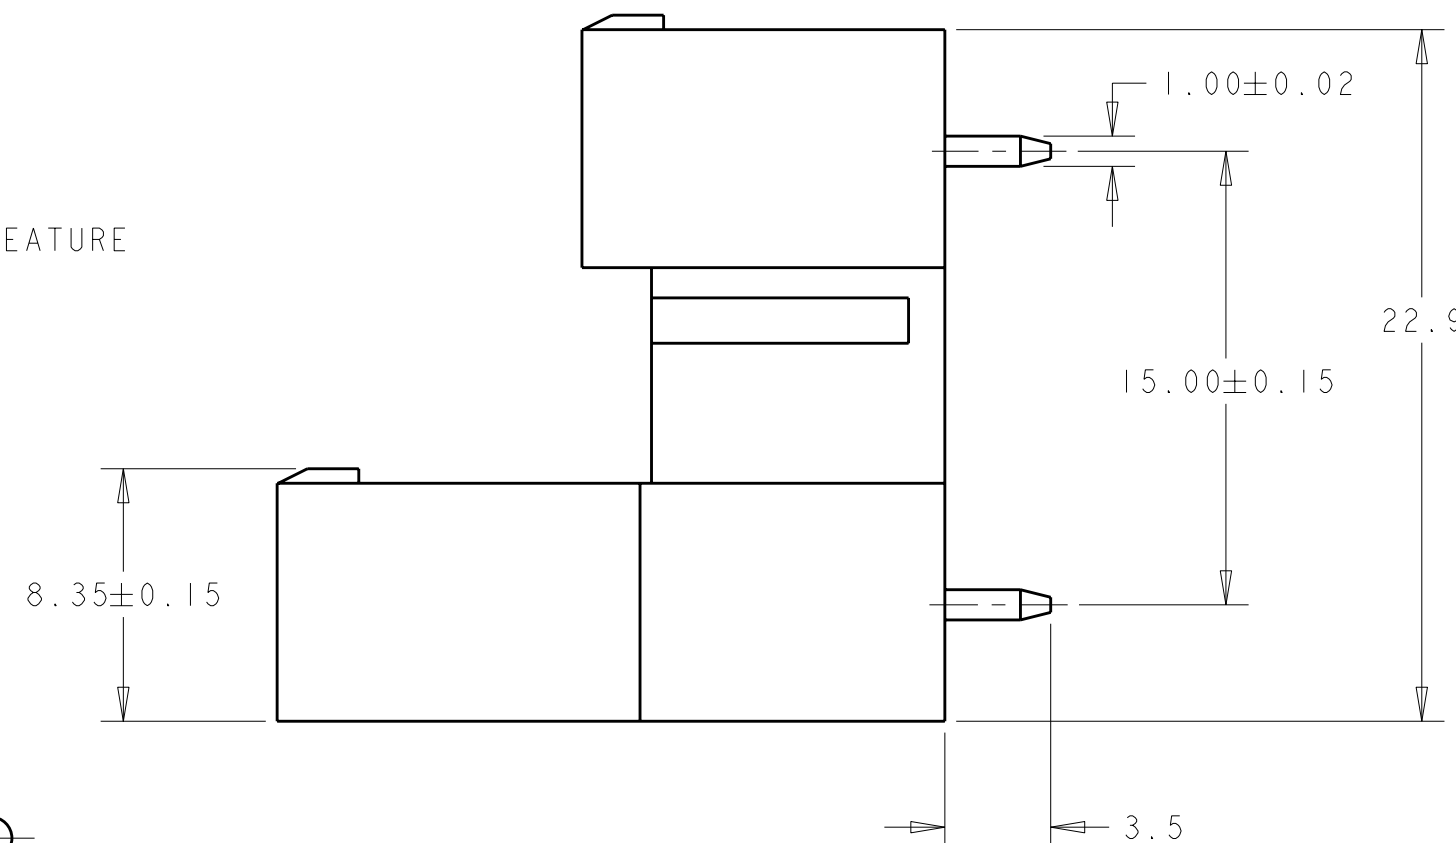


3. P/N FROM 1776164-4 TO 1776164-8 ARE OBTAINED BY ASSEMBLING 1776164-2 AND 1776164-3 TO ACHIEVE THE DESIRED NUMBER OF POSITIONS.



RECOMMENDED PC BOARD LAYOUT

44.5	42.0	8	1776164-8
39.5	37.0	7	1776164-7
34.5	32.0	6	1776164-6
29.5	27.0	5	1776164-5
24.5	22.0	4	1776164-4
19.5	17.0	3	1776164-3
14.5	12.0	2	1776164-2
B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON	2JUL2005	TE Connectivity	
		CHK C. RICHARD	2JUL2005		
DIMENSIONS: mm		APVD C. RICHARD	2JUL2005	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		TERMINAL BLOCK HEADER ASSEMBLY, MULTIPLE, 180 DEGREE, CLOSED ENDS, 5.00mm PITCH	
<p>0 PLC ±. 1 PLC ±.3 3 PLC ±.25 4 PLC ±. ANGLES ±2 FINISH</p>		APPLICATION SPEC		SIZE	CAGE CODE
MATERIAL		WEIGHT	-	A2	00779
		CUSTOMER DRAWING		DRAWING NO	C-1776164
				RESTRICTED TO	-
				SCALE	4:1
				SHEET	OF
				REV	Q1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776164-4](#)