

DO NOT SCALE
DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION



NOTES:

- 1 FOR MINI-APPLICATOR CRIMPING.
- 2 FOR STANDARD-APPLICATOR CRIMPING.
- 3 FOR LOOSE-PIECE VERSIONS SEE DWG. 166297
- 4 UNDERCOATING: 1,3µm Ni.
SELECTIVE : 0,8µm Au.
ZONE I : BRIGHT TIN PLATED.

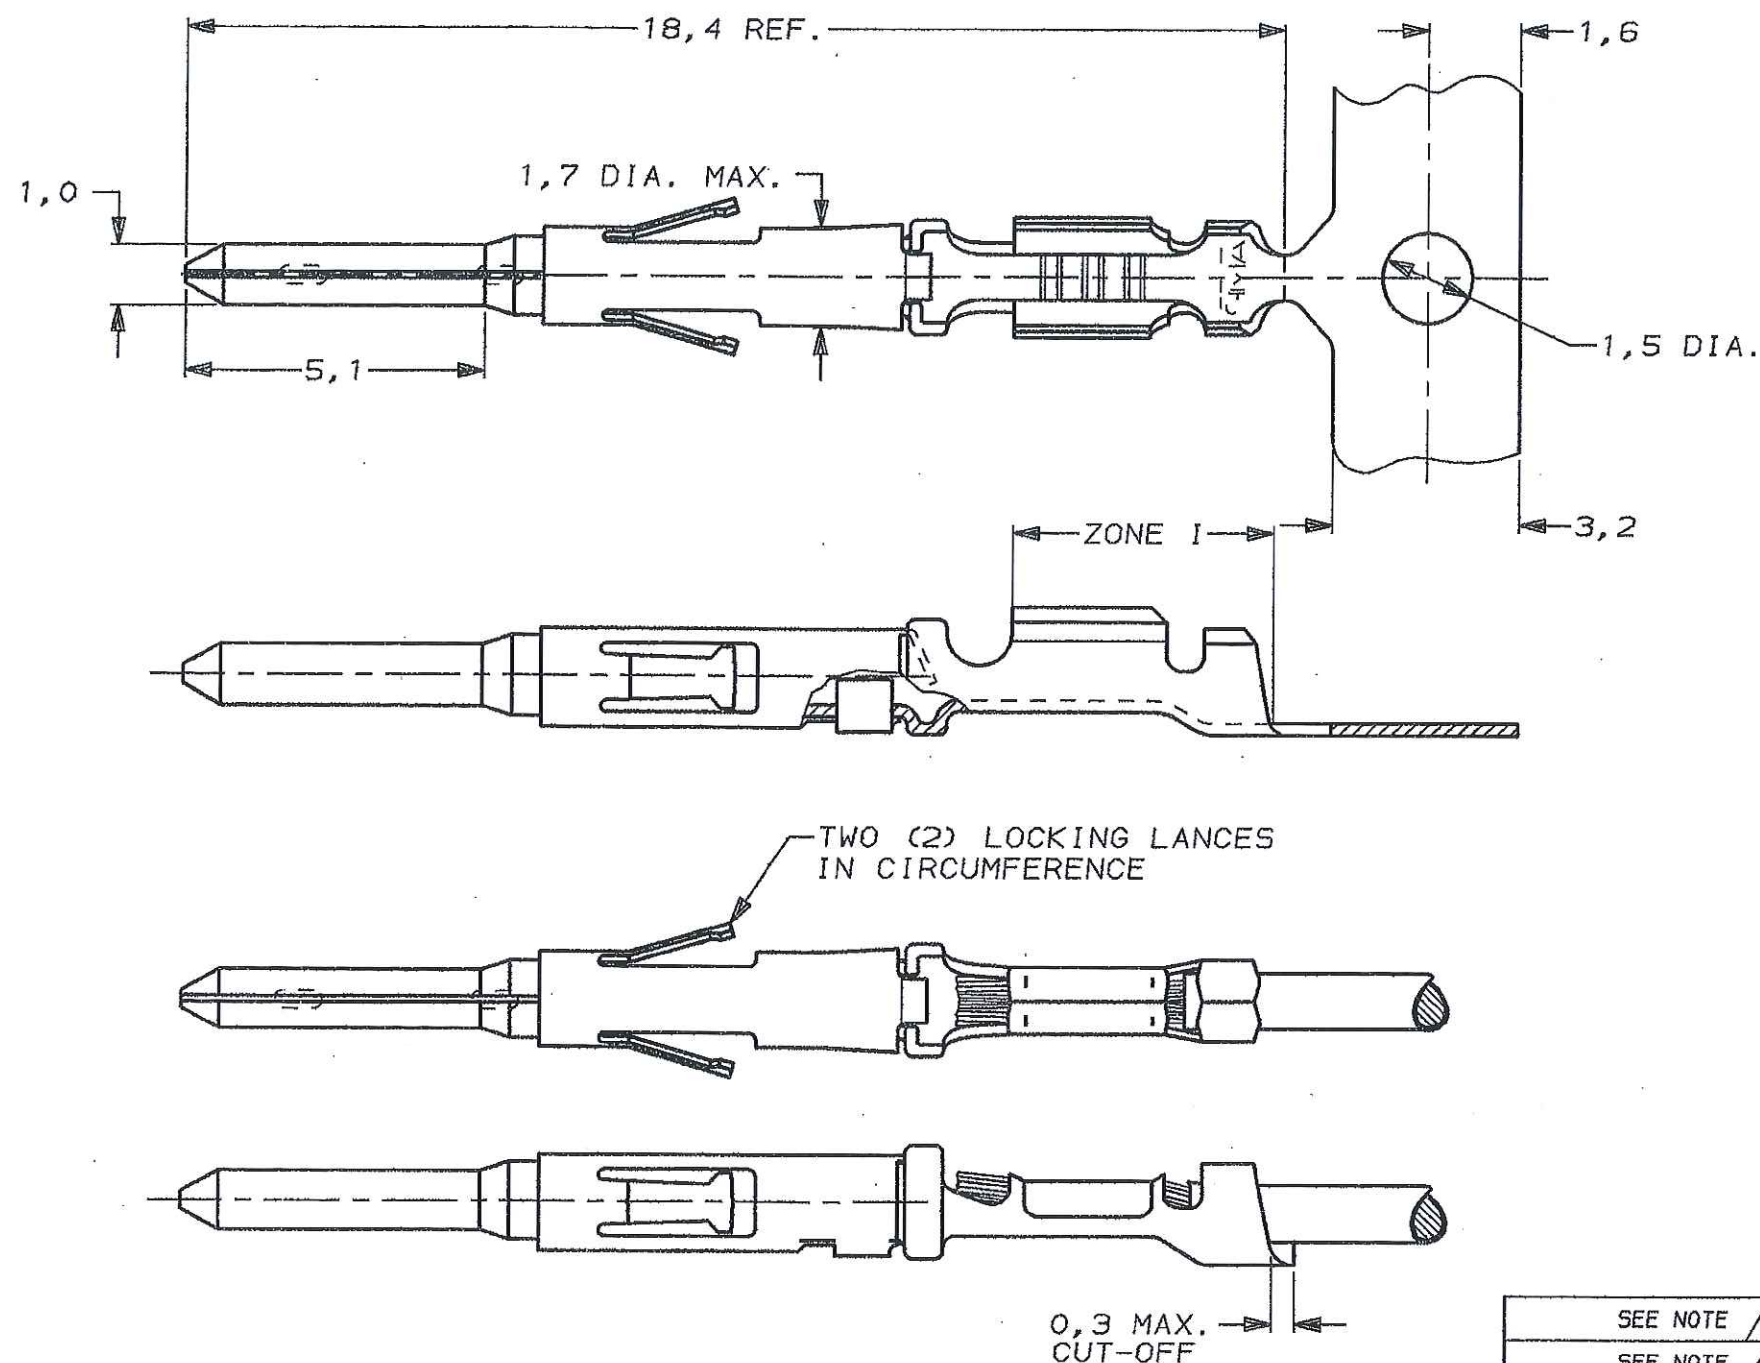

WIRE RANGE :
(0,05-0,14mm²) 26-30 AWG
INSULATION RANGE :
1,22 DIA. MAX.

SEE NOTE 4	STAINLESS STEEL		BRASS		166047-3 2
SEE NOTE 4					166047-1 1
PLATING OF BODY	MATERIAL OF SLEEVE		MATERIAL OF BODY		PARTNUMBER
-	-	-	CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED		
-	-	-	© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.		
-	-	-	THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION , 19		
-	-	-	AMP AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.		
CLARIFIE ROHS FINISH YP YP 06-03-93	NAME				
EH-0077-92	JvL	CvT	04-03-94	CONTACT ASSEMBLY-PIN TYPE XI, SIZE 20	
REVISION RECORD	DR.	CHK.	DATE		
J.v.LIEMPT	CHK.: C.v.TILBURG	APP.: L.v.SOEST	DWG.No.	REV.LTR.	SHEET
DATE: 6 JAN 1993	DATE: 08-02-93	DATE: 08-02-93	C-166047	F	1 OF 1
					A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[166047-1](#)