

20

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.


THIS DRAWING IS UNPUBLISHED.

BY -

COPYRIGHT 20

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	Redrawn to Creo	06MAR2017	JJH	JP

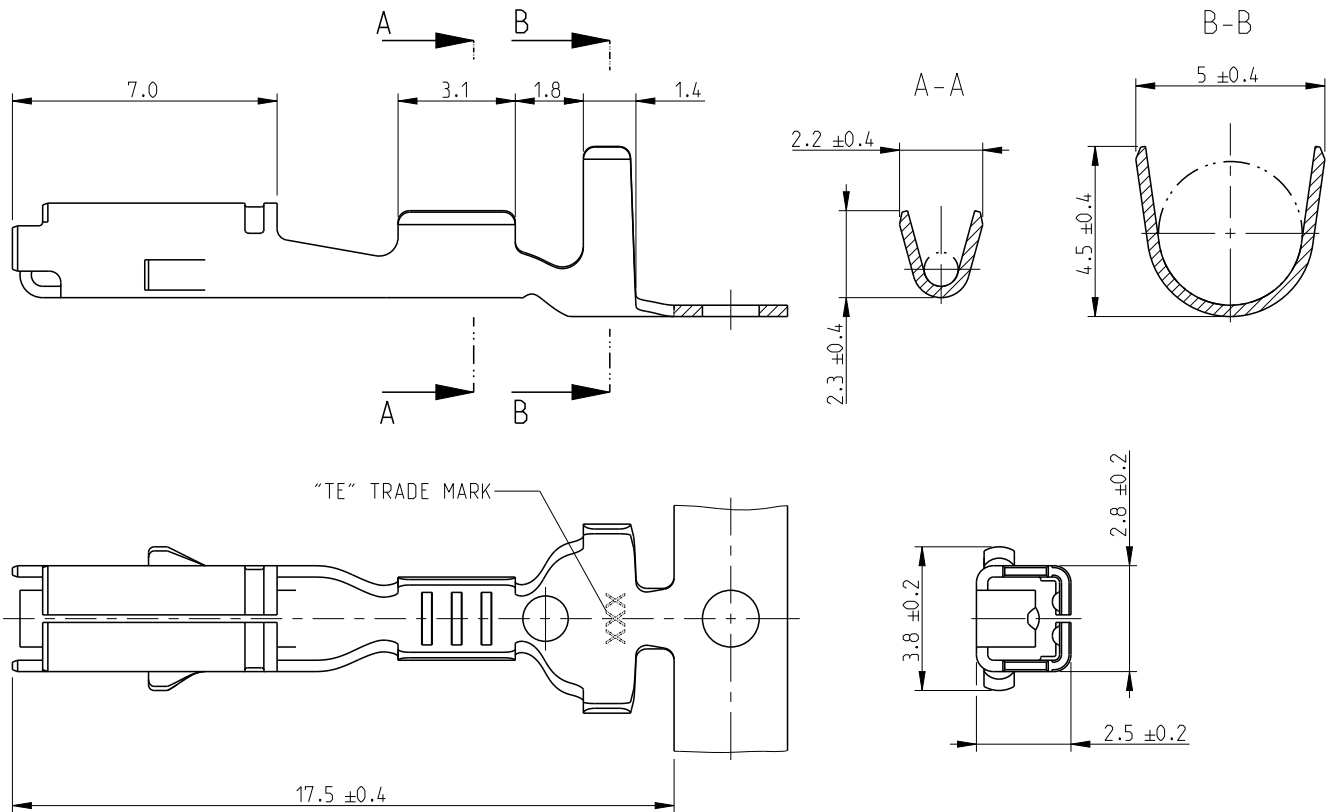

1. DELIVERY STATE: WRAPPED UP ROLL WITH STEP BETWEEN TERMINALS = $11.9 \pm 0.2 \text{ mm}$
 STATO DI FORNITURA: AVVOLTI SU BOBINA CON PASSO TRA TERMINALI DI = $11.9 \pm 0.2 \text{ mm}$

2. SUITABLE FOR SINGLE WIRE SEAL P/N 828904-1
 ADDETTO PER GOMMINO TE 828904-1

CUSTOMER DRAWING FOR INFORMATION ONLY
 DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

B1

INS. DIA. RANGE
(DIAM. ISOLANTE)

2

WIRE RANGE
(RANGO FILO)0.35 - 0.5 mm²PRE-TIN
(PRE-STAGNATO)BRASS
(OTTONE)

282224-1

FINISH/COLOUR
(FINITURE/COLORE)MATERIAL
(MATERIALE)

PART NUMBER

DIMENSIONS:

mm

DWN

D. CHIACCHIO

30AUG1994

CHK

G. VIGNOLI

30AUG1994

APVD

-

PRODUCT SPEC

108-20117

APPLICATION SPEC

114-20067

WEIGHT

-

MATERIAL

-

FINISH

-

TE

TE Connectivity

NAME

RECEPTACLE CONTACT .070 TYPE

-

SIZE

A 4

CAGE CODE

-

DRAWING NO

C-282224

RESTRICTED TO

-

CUSTOMER DRAWING

SCALE

5:1

SHEET

1 OF 1

REV

B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282224-1](#)