

13

12

11

10

9

8

7

6

5

4

3

2

1

J

I

H

G

F


E

D


C

B


A



VIEW SHOWING TYPICAL TERMINAL
CUTOFF OF TAIL (SEE NOTE 10) FOR VOIDED CIRCUITS.



TYPICAL VIEW SHOWING VOIDED CIRCUIT
(CIRCUITS 2,3,6 & 7 SHOWN VOIDED)

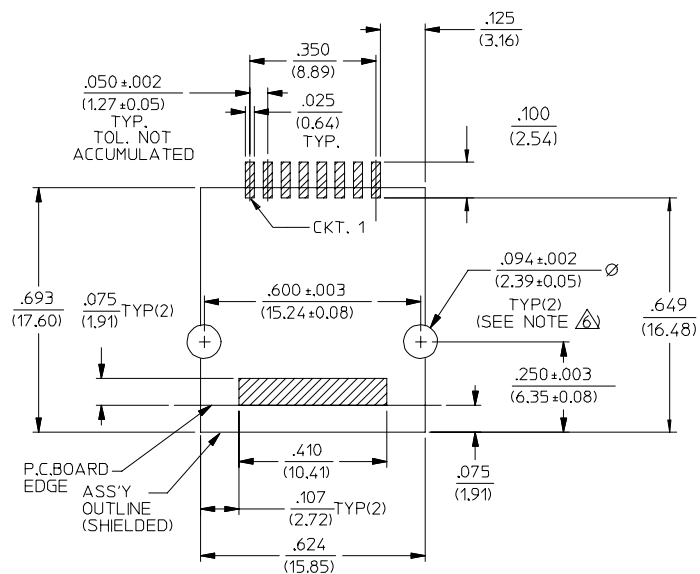

PC BOARD LAYOUT FOR
8 POSITION HOUSING
(COMPONENT SIDE OF BOARD)

NOTES:
1. RECOMMENDED MINIMUM PCB THICKNESS: .034/0.86

SEE SHEET ONE		EC NO: UCP2008-0743		DRAWN:JBELL 2007/07/24		CHECKED:LSCHMIDT 2007/07/30		APPROVED:FSM TH 2007/08/01		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
D2		REV		DESCRIPTION		▽=0		4 PLACES		± ---		± ---		DRAWN BY STAMBAUG		DATE 99/06/03		TITLE SURFACE MOUNT MODULAR JACK W/ SHIELD			
						▽=0		3 PLACES		± ---		± .010		CHECKED BY WIRKUS		DATE 99/06/03					
								2 PLACES		± 0.25		± ---		APPROVED BY EDGLEY		DATE 99/06/03					
								1 PLACE		± ---		± ---									
												</									

12

11

10

9

8

7

6

5

4

3

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[44282-0012](#)