


- ④ RECOMMENDED SPARE PARTS.
- 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- ④ POSITION REAR STRIP GUIDE IN INSULATION BARREL TRANSITION.

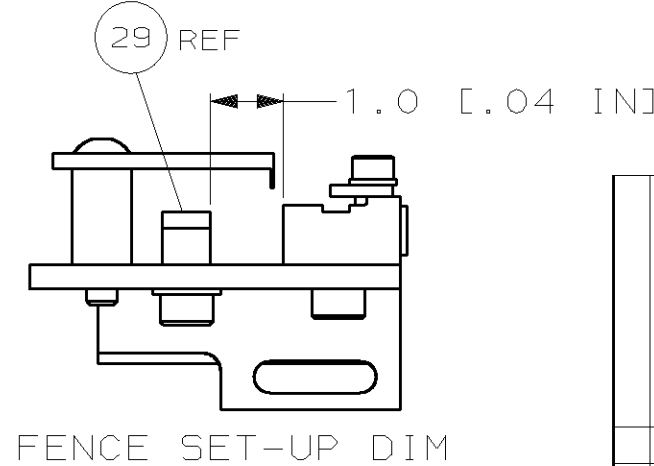

	B	ECN 0150-1267-03	
	A	SEE ECN 015A-0581-01	
P F	LTR	REVISION RECORD	

QTY REOD PER ASSY				PARTS LIST			
		DIMENSIONS: mm (INCHES) DO NOT SCALE PRINT.		MATL	HT TR	FIN	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 14JUN01	APP 14JUN01		
		1 PLC DEC ± 0.5 [0.02 IN]		L: LOFHOUSE	F: BACKHURST		
		2 PLC DEC $\pm$		CHK -	REL 18JUL01		
		3 PLC DEC $\pm$		L: LOFHOUSE			
		ANGLES $\pm$		 AMP Incorporated Harrisburg, PA 17105-3508			
TE	11-03	SURF TEXTURE: ☒		NAME SIDE FEED HD-I APPLICATOR			MACHINE REF
L/JL	JUL01	REMOVE BURRS, BREAK		SCALE -	DWG NO 1426215	SHEET 1 of 1	REV B
APP	DATE	SHARP EDGES RO.38 MAX		CUSTOMER AND ASSEMBLY DRAWING			RESTRICTED TO -
		CAGE CODE 00779					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1426215-2](#)