

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION JUNE, 2006.

© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
		P	LTR	DESCRIPTION
E	B	B		ECR-06-013423

NOTES:

- 1△ PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2△ 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3△ Ag PLATING

4 ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE: DC - 2 GHz
 NOMINAL IMPEDANCE: 75 Ohm
 INSULATION RESISTANCE: 5000 MΩ
 WORKING VOLTAGE: 500 Volts RMS at Sea Level
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 CONTACT RESISTANCE:
 CENTRE CONTACT: 1.50 mΩ Max
 OUTER CONTACT: 0.20 mΩ Max
 VSWR @ xGHz: N/A
 INSERTION LOSS xdb: N/A

5 MECHANICAL CHARACTERISTICS


COUPLING RETENTION FORCE: N/A
 CABLE RETENTION FORCE: N/A
 DURABILITY: 500 Cycles Min

6 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

7 FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE

8 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

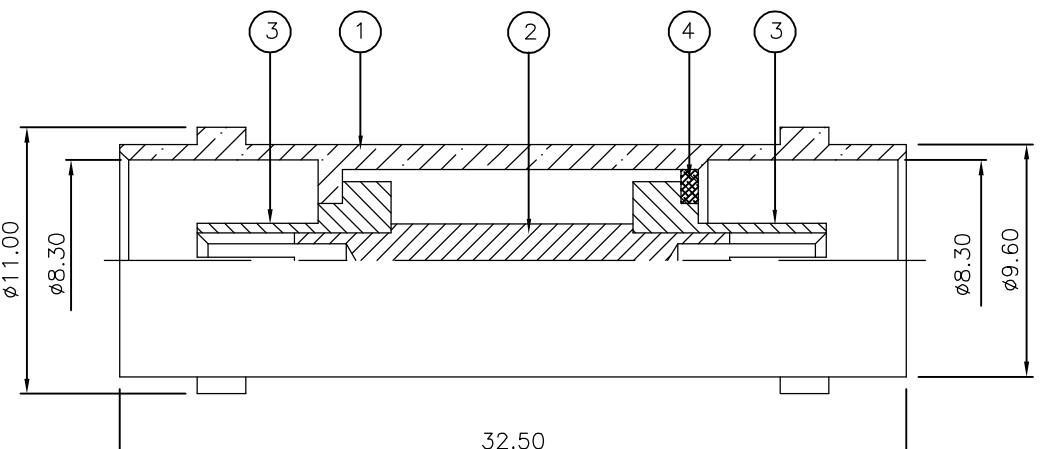

	1	1	BRASS	△	SLEEVE	4
	2	2	PTFE		INSULATION	3
	1	1	BRASS	△	CONTACT	2
	1	1	BRASS	△	BODY	1
	6-0	1-0	MATERIAL		DESCRIPTION	ITEM
	△	△				

QUANTITY PER ASSY

PARTS LIST

tyco
Electronics Tyco Electronics Corporation
 Bideford EX39 4HE

NAME BNC STRAIGHT ADAPTOR J-J 75 OHM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1478041	—
CUSTOMER DRAWING			
SCALE NTS			
SHEET 1 OF 1 REV B			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: TOLERANCES UNLESS OTHERWISE SPECIFIED:

mm

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC ANGLES	± -

MATERIAL FINISH

SEE TABLE

—

DWN J.SANDWELL 13JUN06

CHK S.PARLOW 13JUN06

APVD F.WHEELER-KING 13JUN06

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1478041-0](#)