
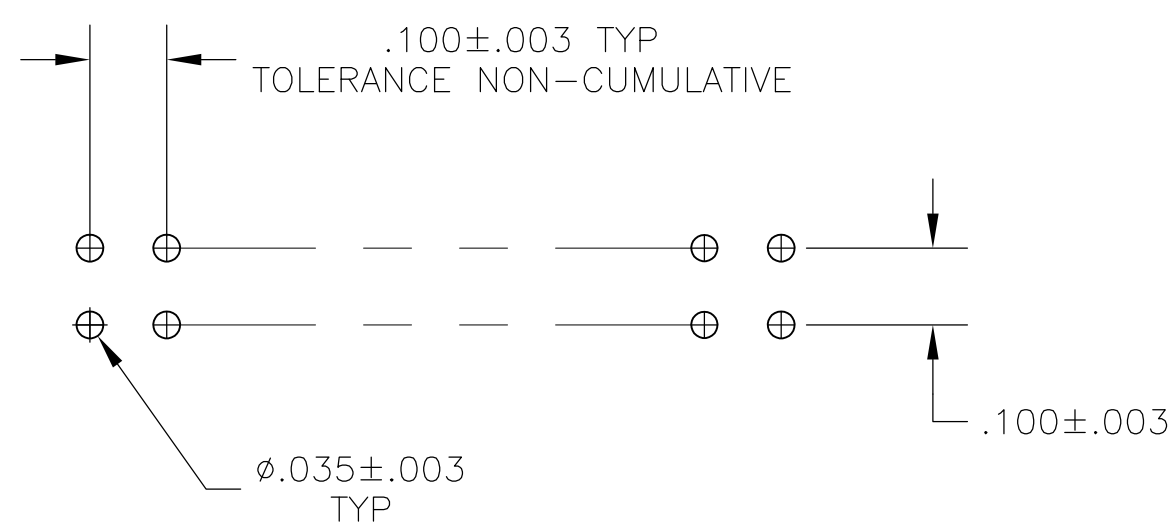
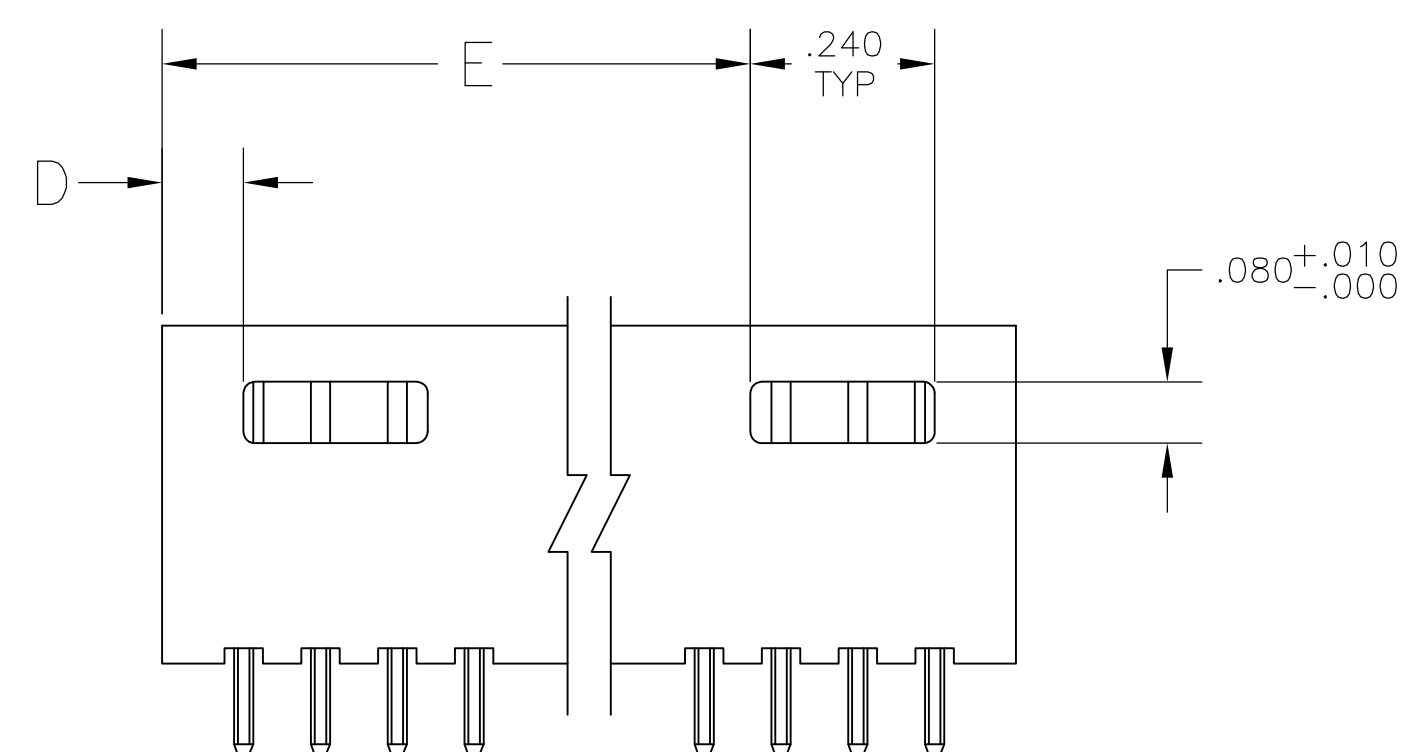
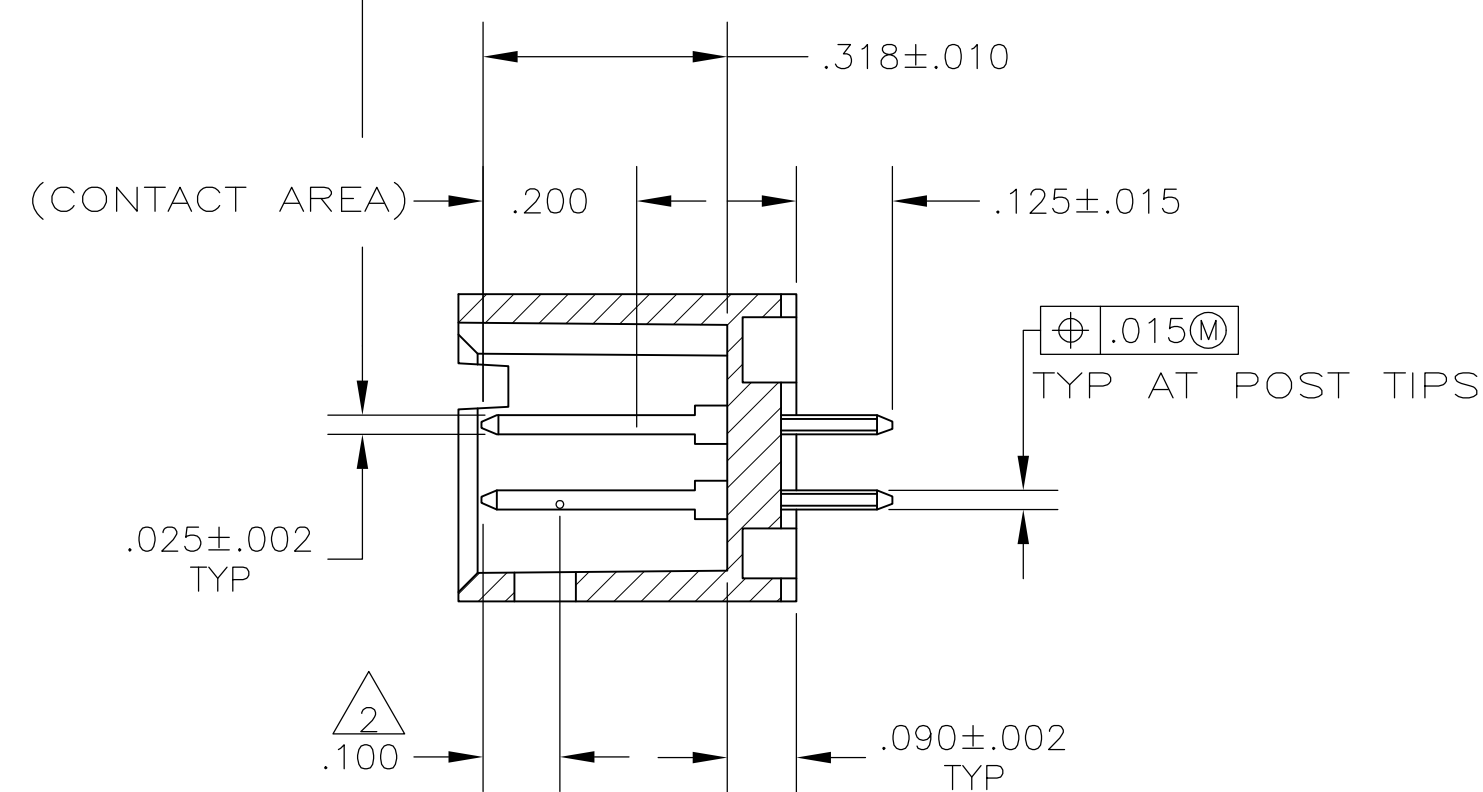
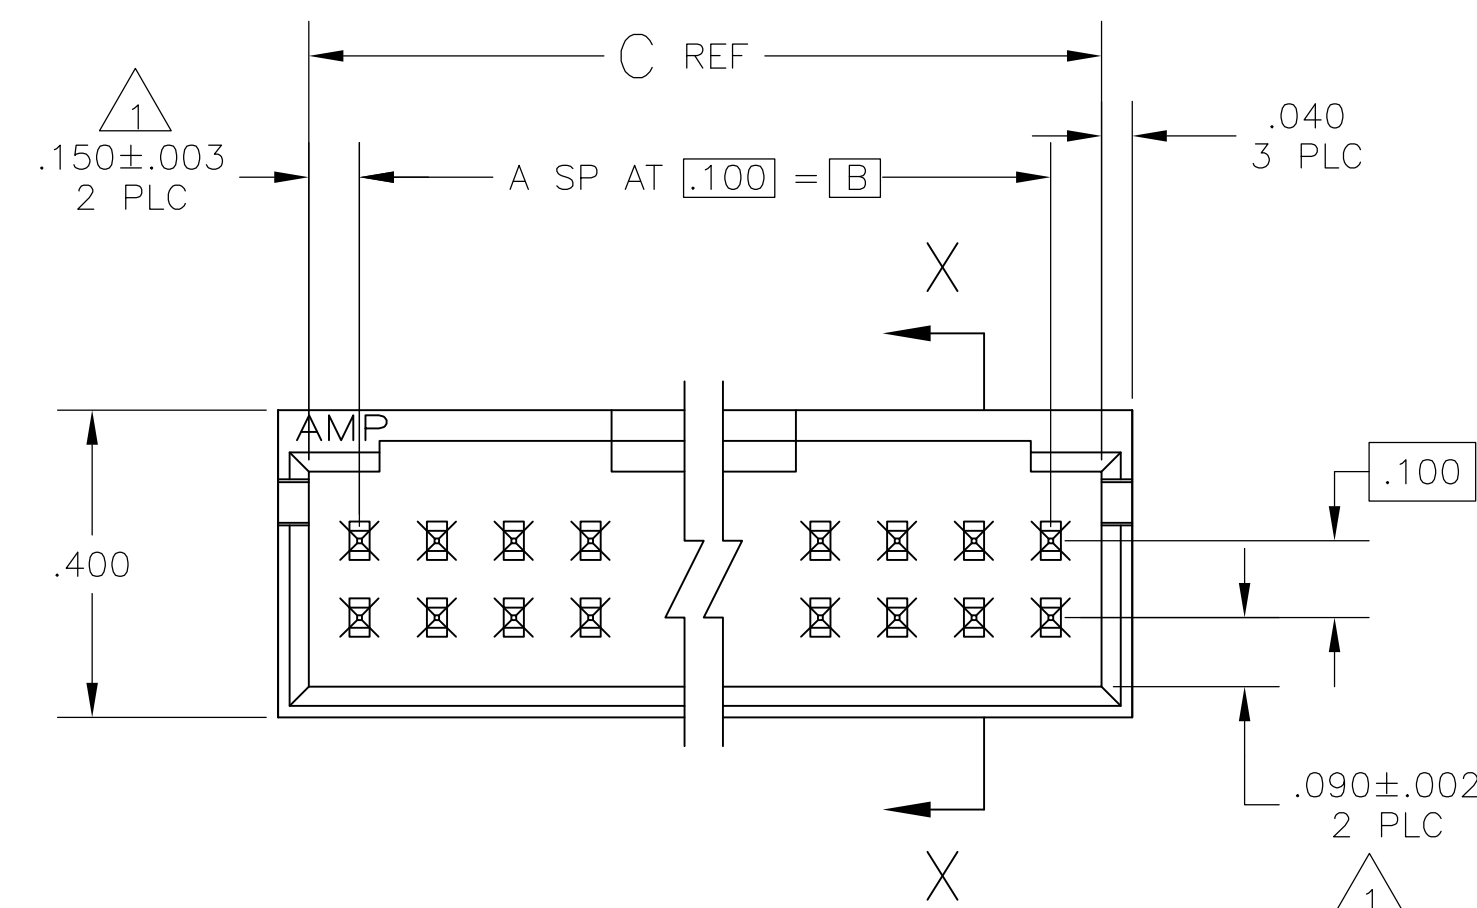


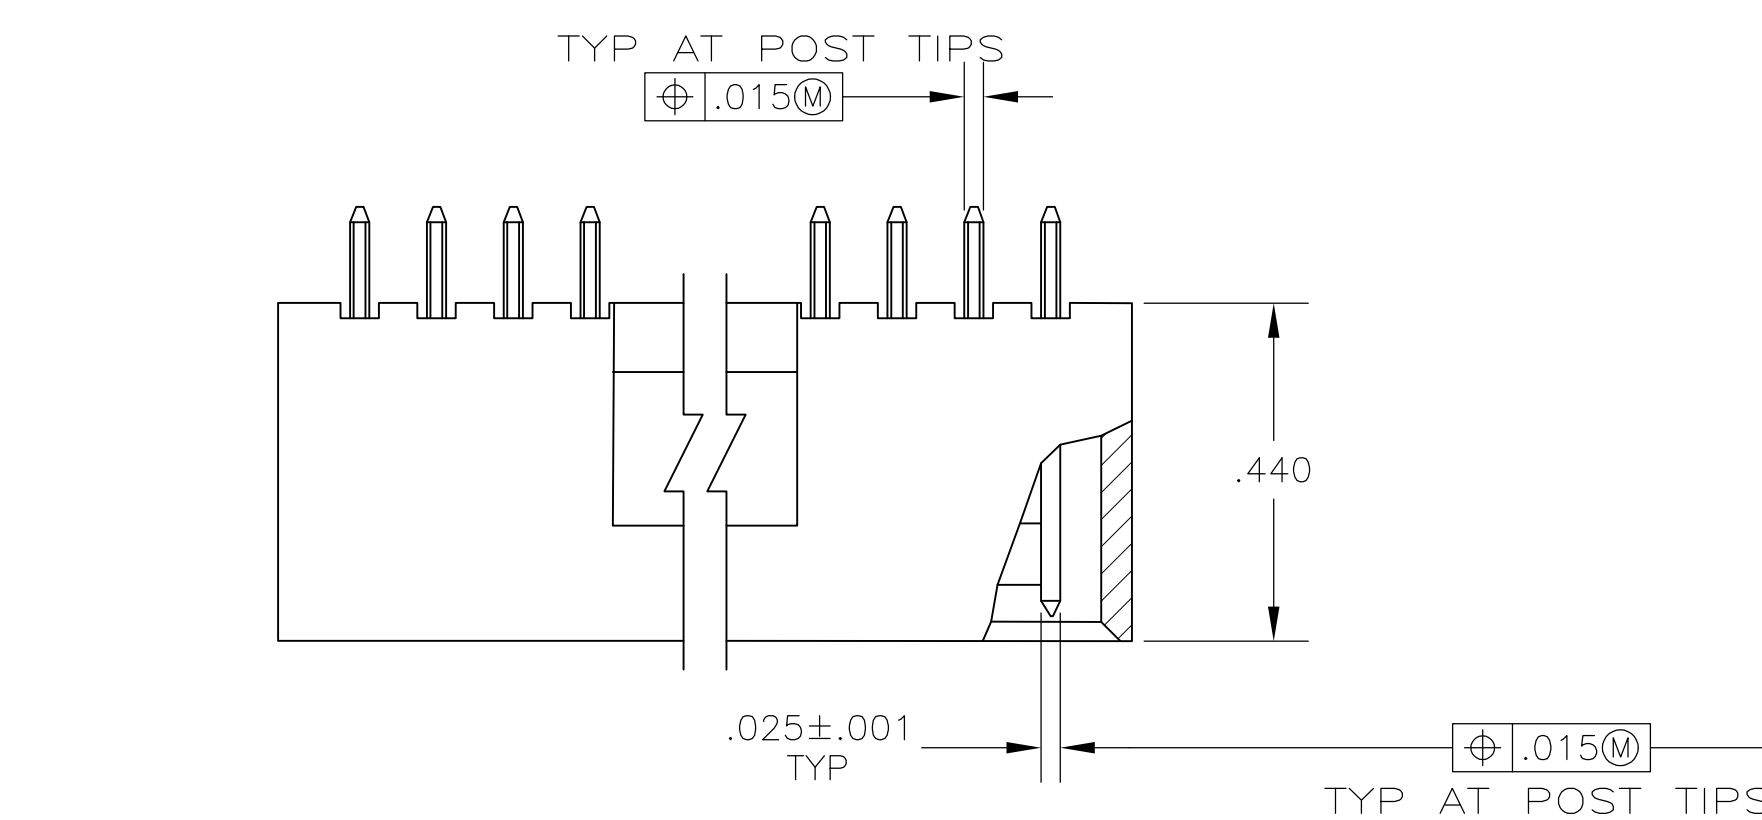

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 INDICATED PARTS ARE PACKED IN "GANG-OF -TUBES"
- 4 POSTS; .000030 GOLD IN CONTACT AREA, .000100—.000200 MATTE TIN—LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 5 POSTS; .000030 GOLD IN CONTACT AREA, .000100—.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN H.MOLL		04 SEP 87	 TE Connectivity	
		CH MAYER		04 SEP 87		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, VERTICAL, .100X.100 C/L, WITH .025 SO POSTS
INCHES		FRACTIONS		F.R. FEJDT		
		0 PLC ± —		PRODUCT SPEC		
		1 PLC ± —		APPLICATION SPEC		
2 PLC ± .005 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH		SEE TABLE		WEIGHT		—
MATERIAL: HYDING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POSTS: PINK BRINZE		CUSTOMER DRAWING		SIZE CASE CODE DRAWING NO A1 00779 C=103169		RESTRICTED
				SCALE 4:1 SHEET 1 OF 1 REV 12		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-103169-8](#)