


300W Single Output, Convection Cooled Power Supplies

Features

- ◆ Universal Input (85 - 265VAC)
- ◆ Power Factor Corrected
- ◆ Convection cooling (300W) or Forced Air (336-338W)
- ◆ Five year warranty
- ◆ Less than 0.5mA earth leakage current

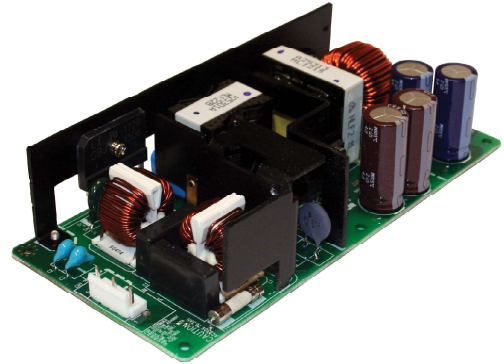

Key Market Segments & Applications



Specifications		ZWS300BAF
Model		ZWS300BAF
Input Voltage	V	85-265VAC (47-63Hz), 120-370VDC ⁽⁵⁾
Input Current	A	3.7 / 1.9 (Convection cooled rating)
Inrush Current ⁽¹⁾⁽²⁾	A	15 / 30
Power Factor	-	0.97 at 100VAC, 0.93 at 200VAC, Meets EN61000-3-2
Leakage Current	mA	0.5mA Max. Typically 0.2mA (100VAC), 0.4mA (230VAC)
Off Load Power Draw	W	Typically 0.1W at 100VAC, 0.5W at 200VAC, 0.8W at 265VAC when unit is in inhibit
Temperature Coefficient	%/°C	<0.02%/°C
Overcurrent Protection ⁽³⁾	-	>116% of convection cooled rated output current (>105% for 12V model)
Overvoltage Protection	V	12V: 13.8-16.2V, 15V: 17.3-20.3V, 24V: 28.8-33.6V, 36V: 41.4-48.6V, 48V: 55.2-64.8V
Hold Up Time (Typ) ⁽¹⁾	ms	18ms at 100VAC input (Convection cooled rating)
Efficiency ⁽¹⁾	%	12 & 15V models: 86 / 89%, 24V, 36V & 48V models: 88 / 91% (Convection cooled rating)
Remote On/Off	-	Optional, see instruction manual
Operating Temperature 12V & 15V Models	°C	Convection: -10°C to +70°C, derate linearly to 40% load from 40°C to 70°C 1.4m/s Airflow: -10°C to +70°C, derate linearly to 60% load from 50°C to 70°C
Operating Temperature 24V, 36V & 48V Models	°C	Convection: -10°C to +70°C, derate linearly to 40% load from 45°C to 70°C 0.7m/s Airflow: -10°C to +70°C, derate linearly to 60% load from 50°C to 70°C 1.4m/s Airflow: -10°C to +70°C, derate linearly to 70% load from 60°C to 70°C
Storage Temperature	°C	-30 to +75°C
Humidity (non condensing)	%RH	Operating: 30 - 90%RH, Storage: 10 - 90%RH
Cooling	-	Convection or forced air
Withstand Voltage	-	Input to Ground 2kVAC (20mA), Input to Output 3kVAC (20mA), Output to Ground 500VAC (20mA) for 1 min.
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6m/s ² constant X, Y, Z 1 hour each
Shock	-	< 196.1 m/s ²
Safety Agency Certifications	-	IEC/EN/UL/CSA60950-1, IEC/EN/UL/CSA62368-1, EN50178 (OV II), CE Mark
Conducted & Radiated EMI ⁽⁴⁾	-	EN55011/EN55022-B, FCC Class B, VCCI-B
Immunity	-	EN61000-4-2 (Ivl 2, 3), -3 (Ivl 3), -4 (Ivl 3), -5 (Ivl 3, 4), -6 (Ivl 3), -8 (Ivl 4), -11; EN61000-6-2
Weight (Typ)	g	540g (open frame)
Size (WxHxD)	in (mm)	3.31 x 1.65 x 7.09" (84 x 42 x 180) open frame
Warranty	yrs	Five Years

Notes:

- (1) 100 / 200VAC Input
- (2) 25°C ambient (cold start)
- (3) Avoid prolonged operation in overload
- (4) Forced air rating: Class A radiated
- (5) Safety certified for AC input only

Model Selector							
Model	Output Voltage	Adjustment Range	Max Current Convection	Max Current Forced Air	Line Reg (mV)	Load Reg (mV)	Ripple & Noise (mV)
ZWS300BAF12	12V	9.6 - 13.2V	25A	25A	48	100	100
ZWS300BAF15	15V	13.5 - 20.3V	20A	22A	60	120	120
ZWS300BAF24	24V	21.6 - 27.5V	12.5A	14A	96	150	150
ZWS300BAF36	36V	32.4 - 39.6V	8.4A	9.4A	144	240	250
ZWS300BAF48	48V	39.5 - 52.8V	6.3A	7A	192	240	250

Outline Drawing

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (INPUT SIDE CN1)	B3P5-VH	JST	1
PIN HEADER (OUTPUT SIDE CN51)	B8P-VH	JST	1

*OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.

MATCHING HOUSINGS, PINS & TOOL (NOT INCLUDED WITH THE PRODUCT):

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
SOCKET HOUSING (CN1)	VHR-5N	JST	1
SOCKET HOUSING (CN51)	VHR-8N	JST	1
TERMINAL PINS	SVH-21T-P1.1	JST	11
	BVH-21T-P1.1	JST	11
HAND CRIMPING TOOL	YC-160R	JST	-

NOTES:

A: 4- ϕ 3.5 HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.

B: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, AND MAXIMUM OUTPUT CURRENT ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

C: COUNTRY OF MANUFACTURE WILL BE SHOWN HERE.

D: \perp IS FOR SAFETY GROUND CONNECTION.

E: TO KEEP THE DISTANCE MORE THAN 4mm BETWEEN PCB EDGE AND CUSTOMER'S CHASSIS.

F: OPTION MODEL(ZWS300BAF-*/R)
 REMOTE ON/OFF CONTROL CONNECTOR (CN52) : B2B-XH-AM (JST)
 MATCHING HOUSING : XHP-2 (JST)
 MATCHING TERMINAL : BXH-001T-P0.6 (JST) OR SXH-001T-P0.6 (JST)
 HAND CRIMPING TOOL : YC-110R (JST) OR YRS-110 (JST)
 MATCHING HOUSING AND TERMINAL ---- NOT INCLUDED WITH THE PRODUCT

SCALE FOR NAME PLATE : 2/1

(unit : mm)

MODEL NAME	ZWS300BAF
TDK-Lambda	
A254-02-01	

Options

Suffix	Description
-	JST Connectors
/L	L Bracket
/A	Cover & L Bracket
/R	Remote On/Off
/T	Screw Terminals
/CO2	PCB Coating
Example	ZWS300BAF24/TA*

* please contact factory for other combinations of option codes

Similar Products

ZWS-B, -BAF, -BP	10W to 240W Single output
HWS	15W to 1800W Single Output, Enclosed
EFE	300W to 400W Single Output, Medical & ITE
CFE400M	300W to 400W Single Output, Medical & ITE

For Additional Information, please visit
<https://product.tdk.com/en/power/>



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[ZWS300BAF12/T](#) [ZWS300BAF12](#) [ZWS300BAF12/L](#) [ZWS300BAF12/R](#) [ZWS300BAF15/TA](#) [ZWS300BAF12/CO2](#)
[ZWS300BAF12/TA](#) [ZWS300BAF15/A](#) [ZWS300BAF15/CO2](#) [ZWS300BAF12/TL](#) [ZWS300BAF15/L](#) [ZWS300BAF15/T](#)
[ZWS300BAF15/TL](#) [ZWS300BAF12/A](#) [ZWS300BAF15/R](#) [ZWS300BAF15](#)