

FLORENCE-Z30

~30° medium beam

TECHNICAL SPECIFICATIONS:

Dimensions	286.0 x 61.0 mm
Height	8.5 mm
Fastening	glue
ROHS compliant	yes 


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
FLORENCE-Z30	Linear lens	PMMA	clear	








ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
F14486_FLORENCE-Z30 » Box size: 398 x 298 x 140 mm	72	72	6	7.1

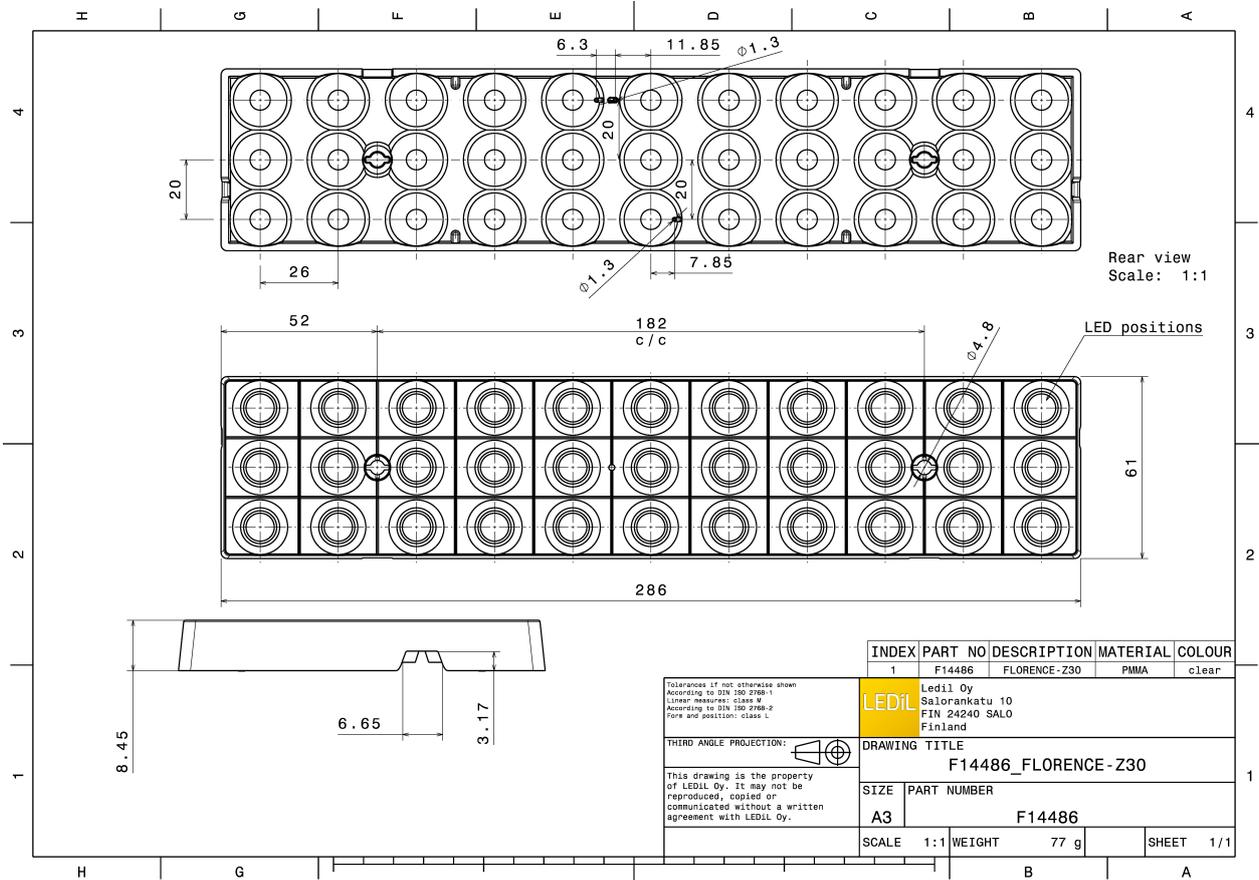



PHOTOMETRIC DATA (MEASURED):
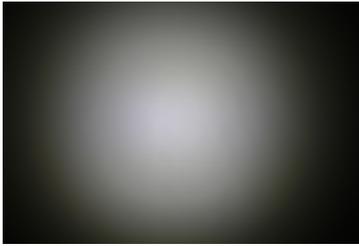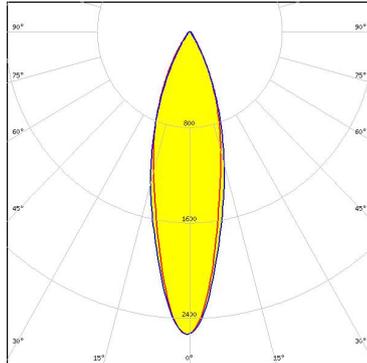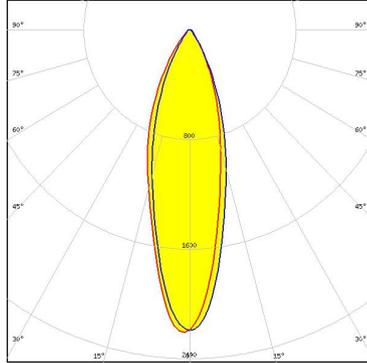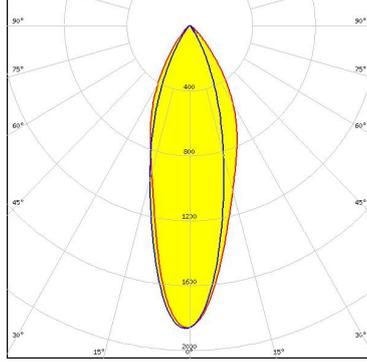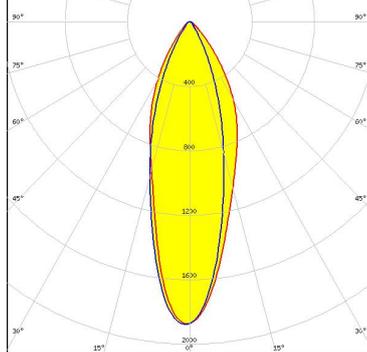
<p></p> <p>LED TRIDINO R3 8x0 1100 1ft HV FWHM 28.0° Efficiency 91 % Peak intensity 2.500 cd/m LEDs/each optic 1 Light colour White Required components:</p>		
<p> LG Innotek</p> <p>LED LG 5630 FWHM 29.0° Efficiency 94 % Peak intensity 2.200 cd/m LEDs/each optic 1 Light colour White Required components:</p>		
<p> LG Innotek</p> <p>LED LG 6030 FWHM 31.0° Efficiency 85 % Peak intensity 1.870 cd/m LEDs/each optic 1 Light colour White Required components: C14453_FLORENCE-3R-SHD-GR</p>		
<p> LG Innotek</p> <p>LED LG 6030 FWHM 31.0° Efficiency 89 % Peak intensity 1.880 cd/m LEDs/each optic 1 Light colour White Required components: C14646_FLORENCE-3R-SHD-WHT</p>		

PHOTOMETRIC DATA (MEASURED):


LG Innotek

LED LG 6030
 FWHM 31.0°
 Efficiency 83 %
 Peak intensity 1.900 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C14592_FLORENCE-3R-SHD-BLK

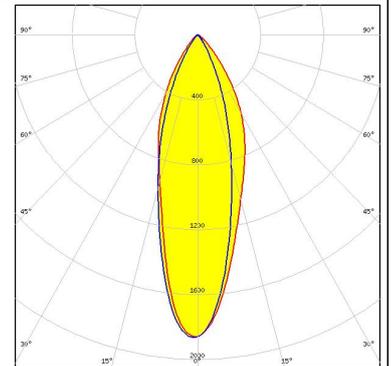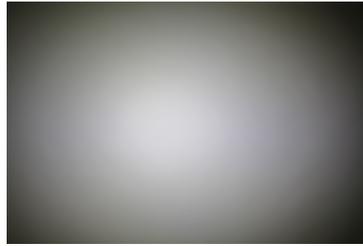



LG Innotek

LED LG 6030
 FWHM 31.0°
 Efficiency 92 %
 Peak intensity 1.900 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

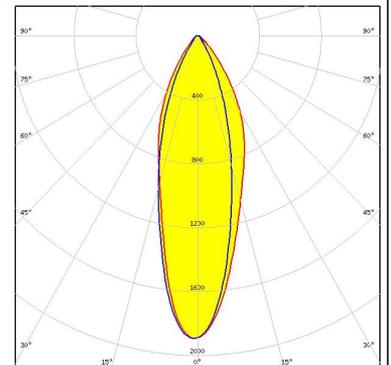


LUMILEDS

LED LUXEON 3030 2D (Round LES)
 FWHM 26.0°
 Efficiency 87 %
 Peak intensity 2.600 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

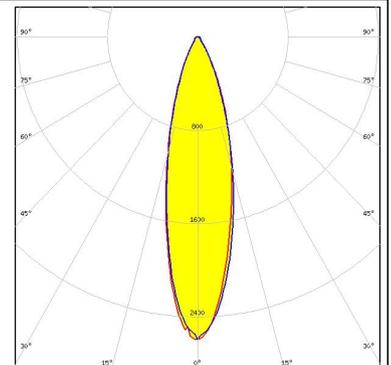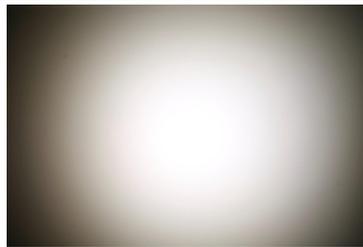

LUMILEDS



LED LUXEON 3535L HE
 FWHM 29.0°
 Efficiency 93 %
 Peak intensity 2.370 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

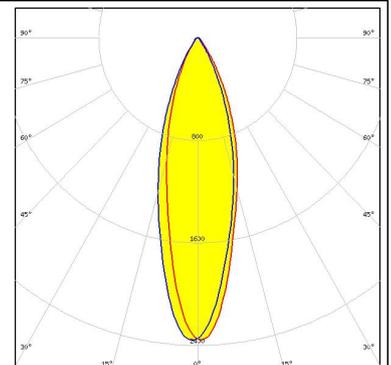


PHOTOMETRIC DATA (MEASURED):





LED LUXEON XR-3535L (L202 - xxx033C30001)
 FWHM 27.0°
 Efficiency 93 %
 Peak intensity 2.400 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

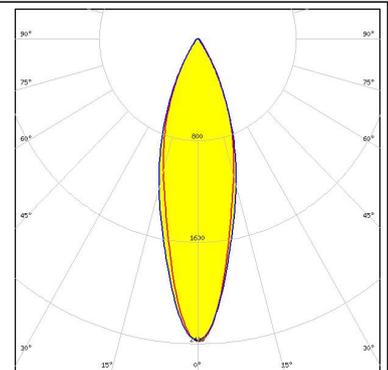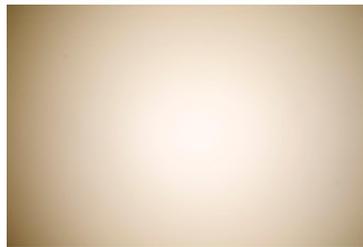


LED MP-2016
 FWHM 24.0°
 Efficiency 92 %
 Peak intensity 3.000 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

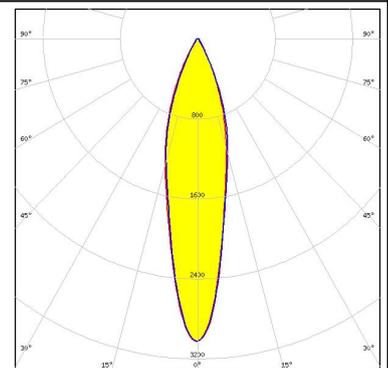

LED NFSW757H
 FWHM 29.0°
 Efficiency 94 %
 Peak intensity 2.373 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C14646_FLORENCE-3R-SHD-WHT

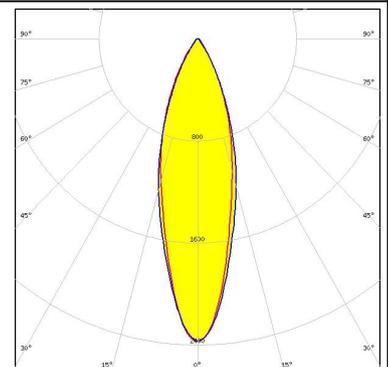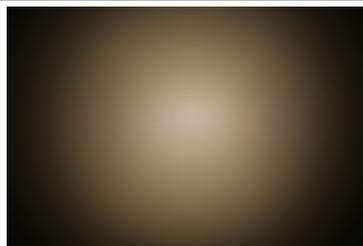



LED NFSW757H
 FWHM 29.0°
 Efficiency 94 %
 Peak intensity 2.339 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

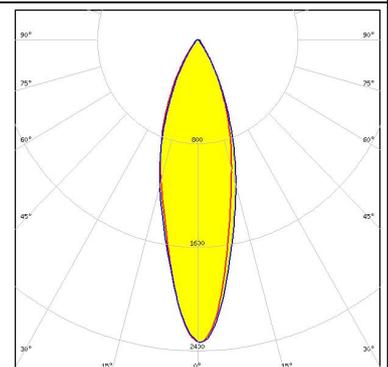

PHOTOMETRIC DATA (MEASURED):


OSRAM

LED PL-BAR-G3 1100 280x55
 FWHM 28.0°
 Efficiency 94 %
 Peak intensity 2.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

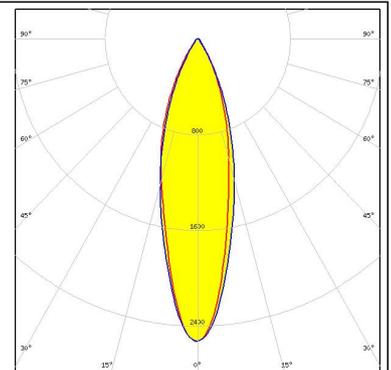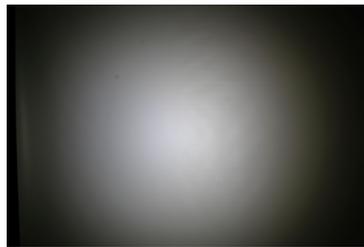

OSRAM



LED PLG2-BAR-1100-xxx-280x55-DC
 FWHM 29.0°
 Efficiency 91 %
 Peak intensity 2.310 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

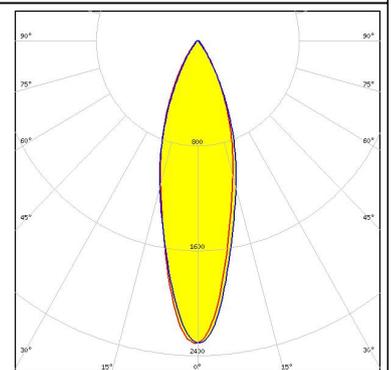

OSRAM

Opto Semiconductors



LED Duris E5
 FWHM 28.0°
 Efficiency 91 %
 Peak intensity 2.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

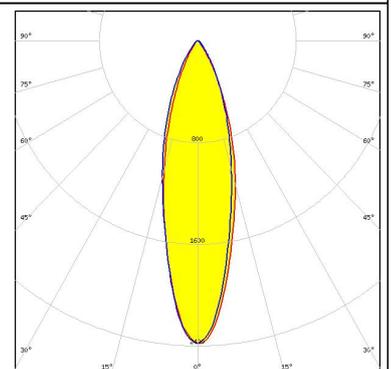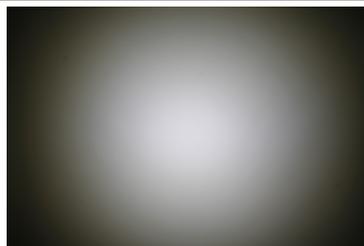

OSRAM

Opto Semiconductors


LED Duris S2
 FWHM 23.0°
 Efficiency 90 %
 Peak intensity 2.820 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

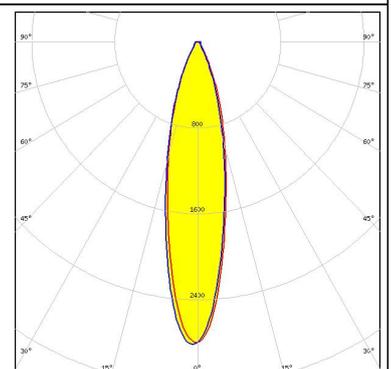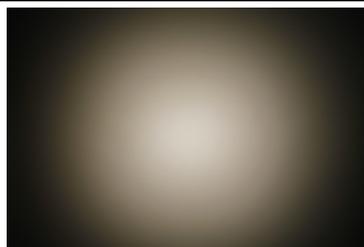

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo LED Line 1ft 650lm 3R HV4 & LV4
FWHM 26.0°
Efficiency 94 %
Peak intensity 2.718 cd/lm
LEDs/each optic 1
Light colour White
Required components:

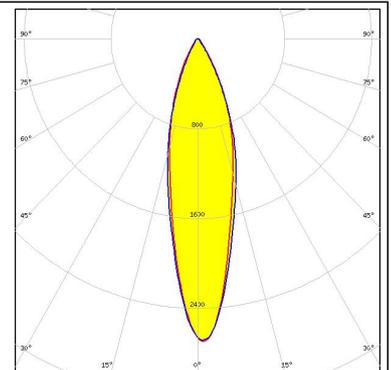



SAMSUNG

LED LM561B
FWHM 28.0°
Efficiency 93 %
Peak intensity 2.440 cd/lm
LEDs/each optic 1
Light colour White
Required components:

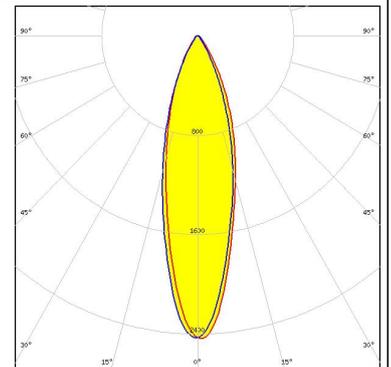



SAMSUNG

LED LM561B Plus
FWHM 27.0°
Efficiency 93 %
Peak intensity 2.570 cd/lm
LEDs/each optic 1
Light colour White
Required components:

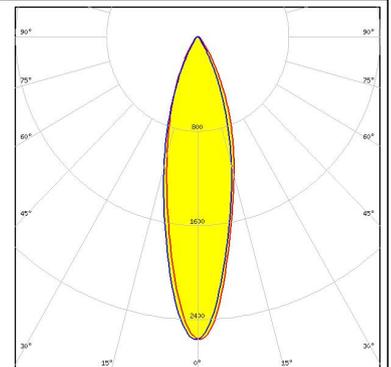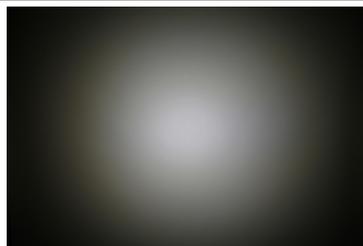

SAMSUNG


LED LM561C
FWHM 28.0°
Efficiency 93 %
Peak intensity 2.420 cd/lm
LEDs/each optic 1
Light colour White
Required components:

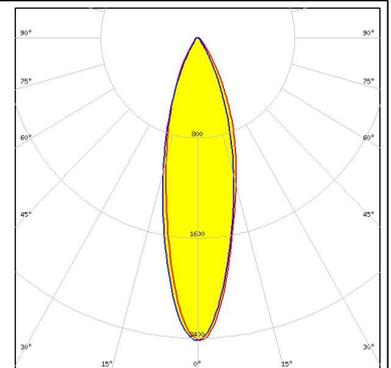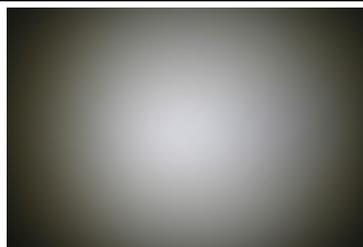

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED LT-R286A
 FWHM 29.0°
 Efficiency 94 %
 Peak intensity 2.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

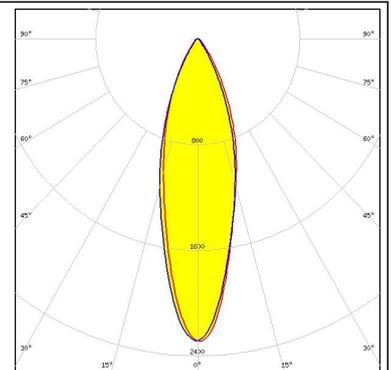


SEOUL SEMICONDUCTOR

LED SEOUL 3030
 FWHM 27.0°
 Efficiency 94 %
 Peak intensity 2.645 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

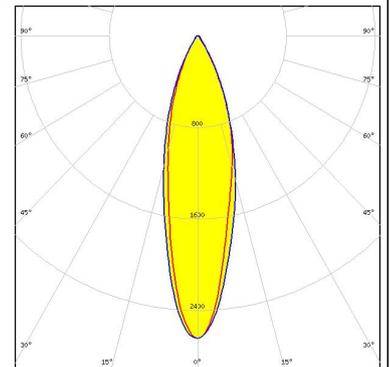


SEOUL SEMICONDUCTOR

LED SEOUL 5630C
 FWHM 27.0°
 Efficiency 94 %
 Peak intensity 2.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:





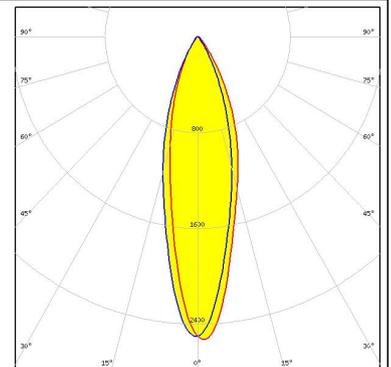


SEOUL SEMICONDUCTOR

LED SEOUL 5630C
 FWHM 27.0°
 Efficiency 88 %
 Peak intensity 2.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14453_FLORENCE-3R-SHD-GR

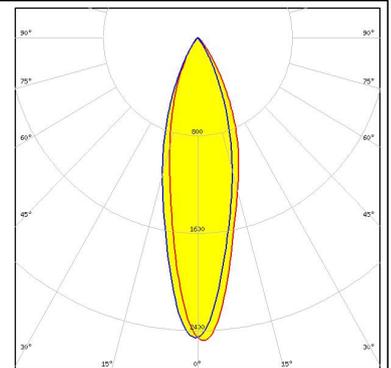


PHOTOMETRIC DATA (MEASURED):
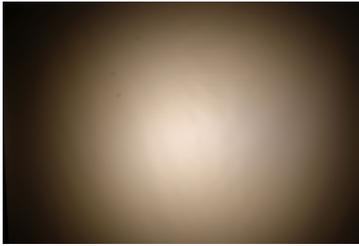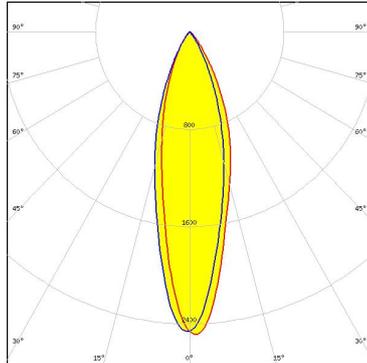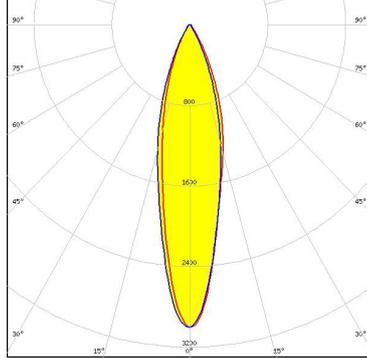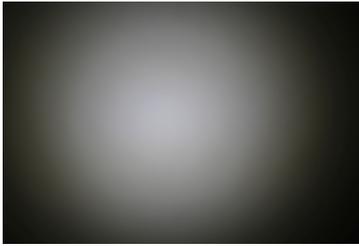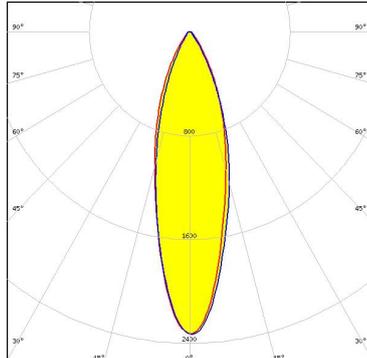
<p> SEOUL SEMICONDUCTOR</p> <p>LED SEOUL 5630C FWHM 27.0° Efficiency 87 % Peak intensity 2.500 cd/m LEDs/each optic 1 Light colour White Required components: C14592_FLORENCE-3R-SHD-BLK</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED SEOUL DC 3030 FWHM 23.0° Efficiency 94 % Peak intensity 3.000 cd/m LEDs/each optic 1 Light colour White Required components:</p>		
<p>TRIDONIC</p> <p>LED LLE G2 55x280mm 2000lm FWHM 29.0° Efficiency 94 % Peak intensity 2.300 cd/m LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (SIMULATED):


LG Innotek

LED LG 3528
 FWHM 18.0°
 Efficiency 92 %
 Peak intensity 4.049 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

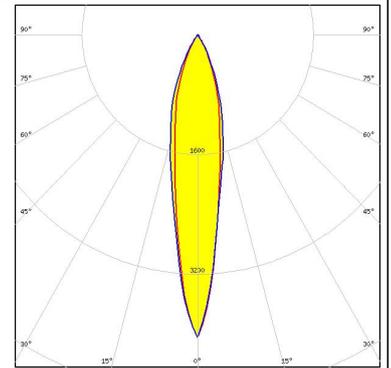


NICHIA

LED NF2x757G
 FWHM 25.0°
 Efficiency 90 %
 Peak intensity 3.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

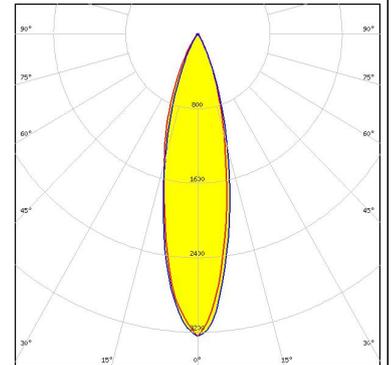


NICHIA

LED NFMW48xA
 FWHM 27.0°
 Efficiency 91 %
 Peak intensity 2.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

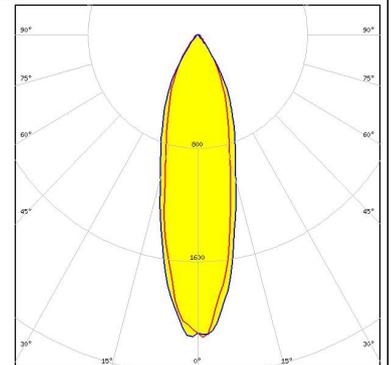

OSRAM Opto Semiconductors


LED Duris E 2835
 FWHM 29.0°
 Efficiency 94 %
 Peak intensity 2.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

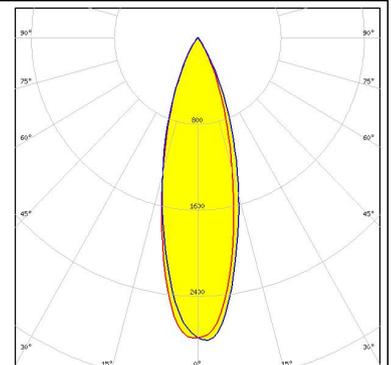

PHOTOMETRIC DATA (SIMULATED):


OSRAM

Opto Semiconductors
 LED Duris E 2835
 FWHM 30.0°
 Efficiency 96 %
 Peak intensity 2.220 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:

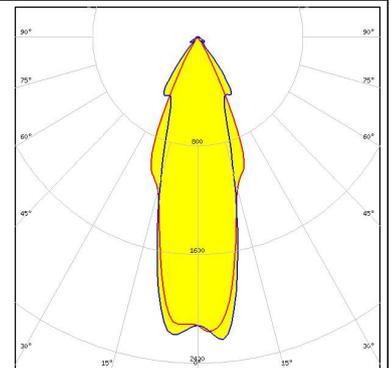


SAMSUNG

LED LM302Z plus
 FWHM 23.0°
 Efficiency 94 %
 Peak intensity 3.446 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

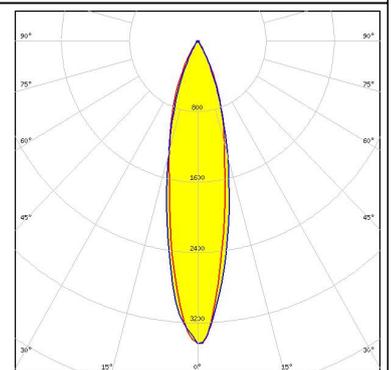


SEOL SEMICONDUCTOR

LED SEOUL 5630D
 FWHM 29.0°
 Efficiency 90 %
 Peak intensity 3.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

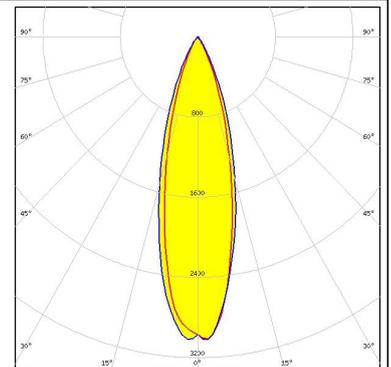

SEOL SEMICONDUCTOR

LED SEOUL DC 3030C
 FWHM 23.0°
 Efficiency 94 %
 Peak intensity 3.506 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

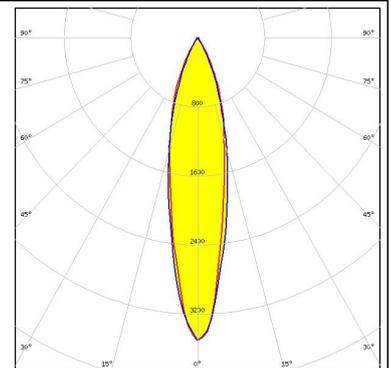

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ledi:](#)

[F14486_FLORENCE-Z30](#)