



LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			7	ECR-12-015027	24AUG2012	HD	CD

a) Part as supplied

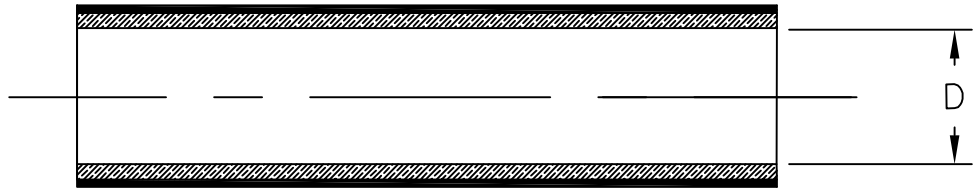

b) Part fully recovered

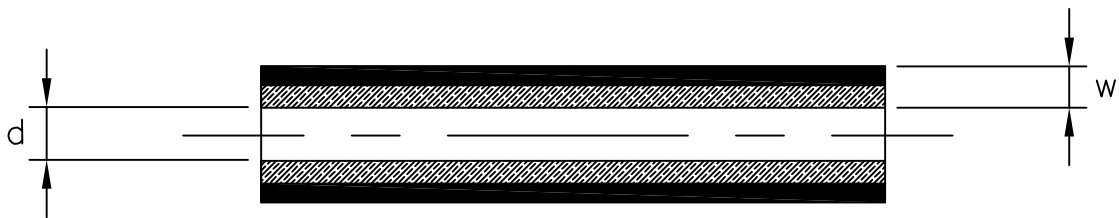

PRODUCT DIMENSIONS & NOTES

DIMENSIONS (in millimetres)

D DIA.	d DIA.	W
	MAX	± 0.20
a	b	b
9.5 – 12.0	1.5	1.6

NOTES:

Material conforms to RAYCHEM specification RK-6214.
 Longitudinal shrinkage on full recovery = -5 to -15%
 Supplied wall thickness concentricity = 60% minimum.


MATERIAL: 1. JACKET Irradiated Modified Polyolefin. (Colour: Clear)
 2. LINER Hot melt adhesive. (Colour: Light Amber)

RELEASED FOR PUBLICATION AUG , 2012.

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT 2011 Tyco Electronics UK Ltd, Swindon, UK

DIMENSIONS:		DWN	31JUL2002	MATERIAL		FINISH					
mm		AL		-		-					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	-	 TE Connectivity							
		APVD	30JUL2002								
		CD		NAME							
		PRODUCT SPEC									
		RK-6214									
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC		RPPM-NR510							
		-									
		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO					
		WEIGHT		A4	-	C-RPPM-NR510	-				
		12.99g/m									
CUSTOMER DRAWING						SCALE	1:1	SHEET	1 of 1	REV	7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[RPPM-NR510-X-35MM](#) [RPPM-NR501-X-SP](#) [RPPM-NR510-X-80MM](#) [RPPM-NR510-X-50MM](#)