


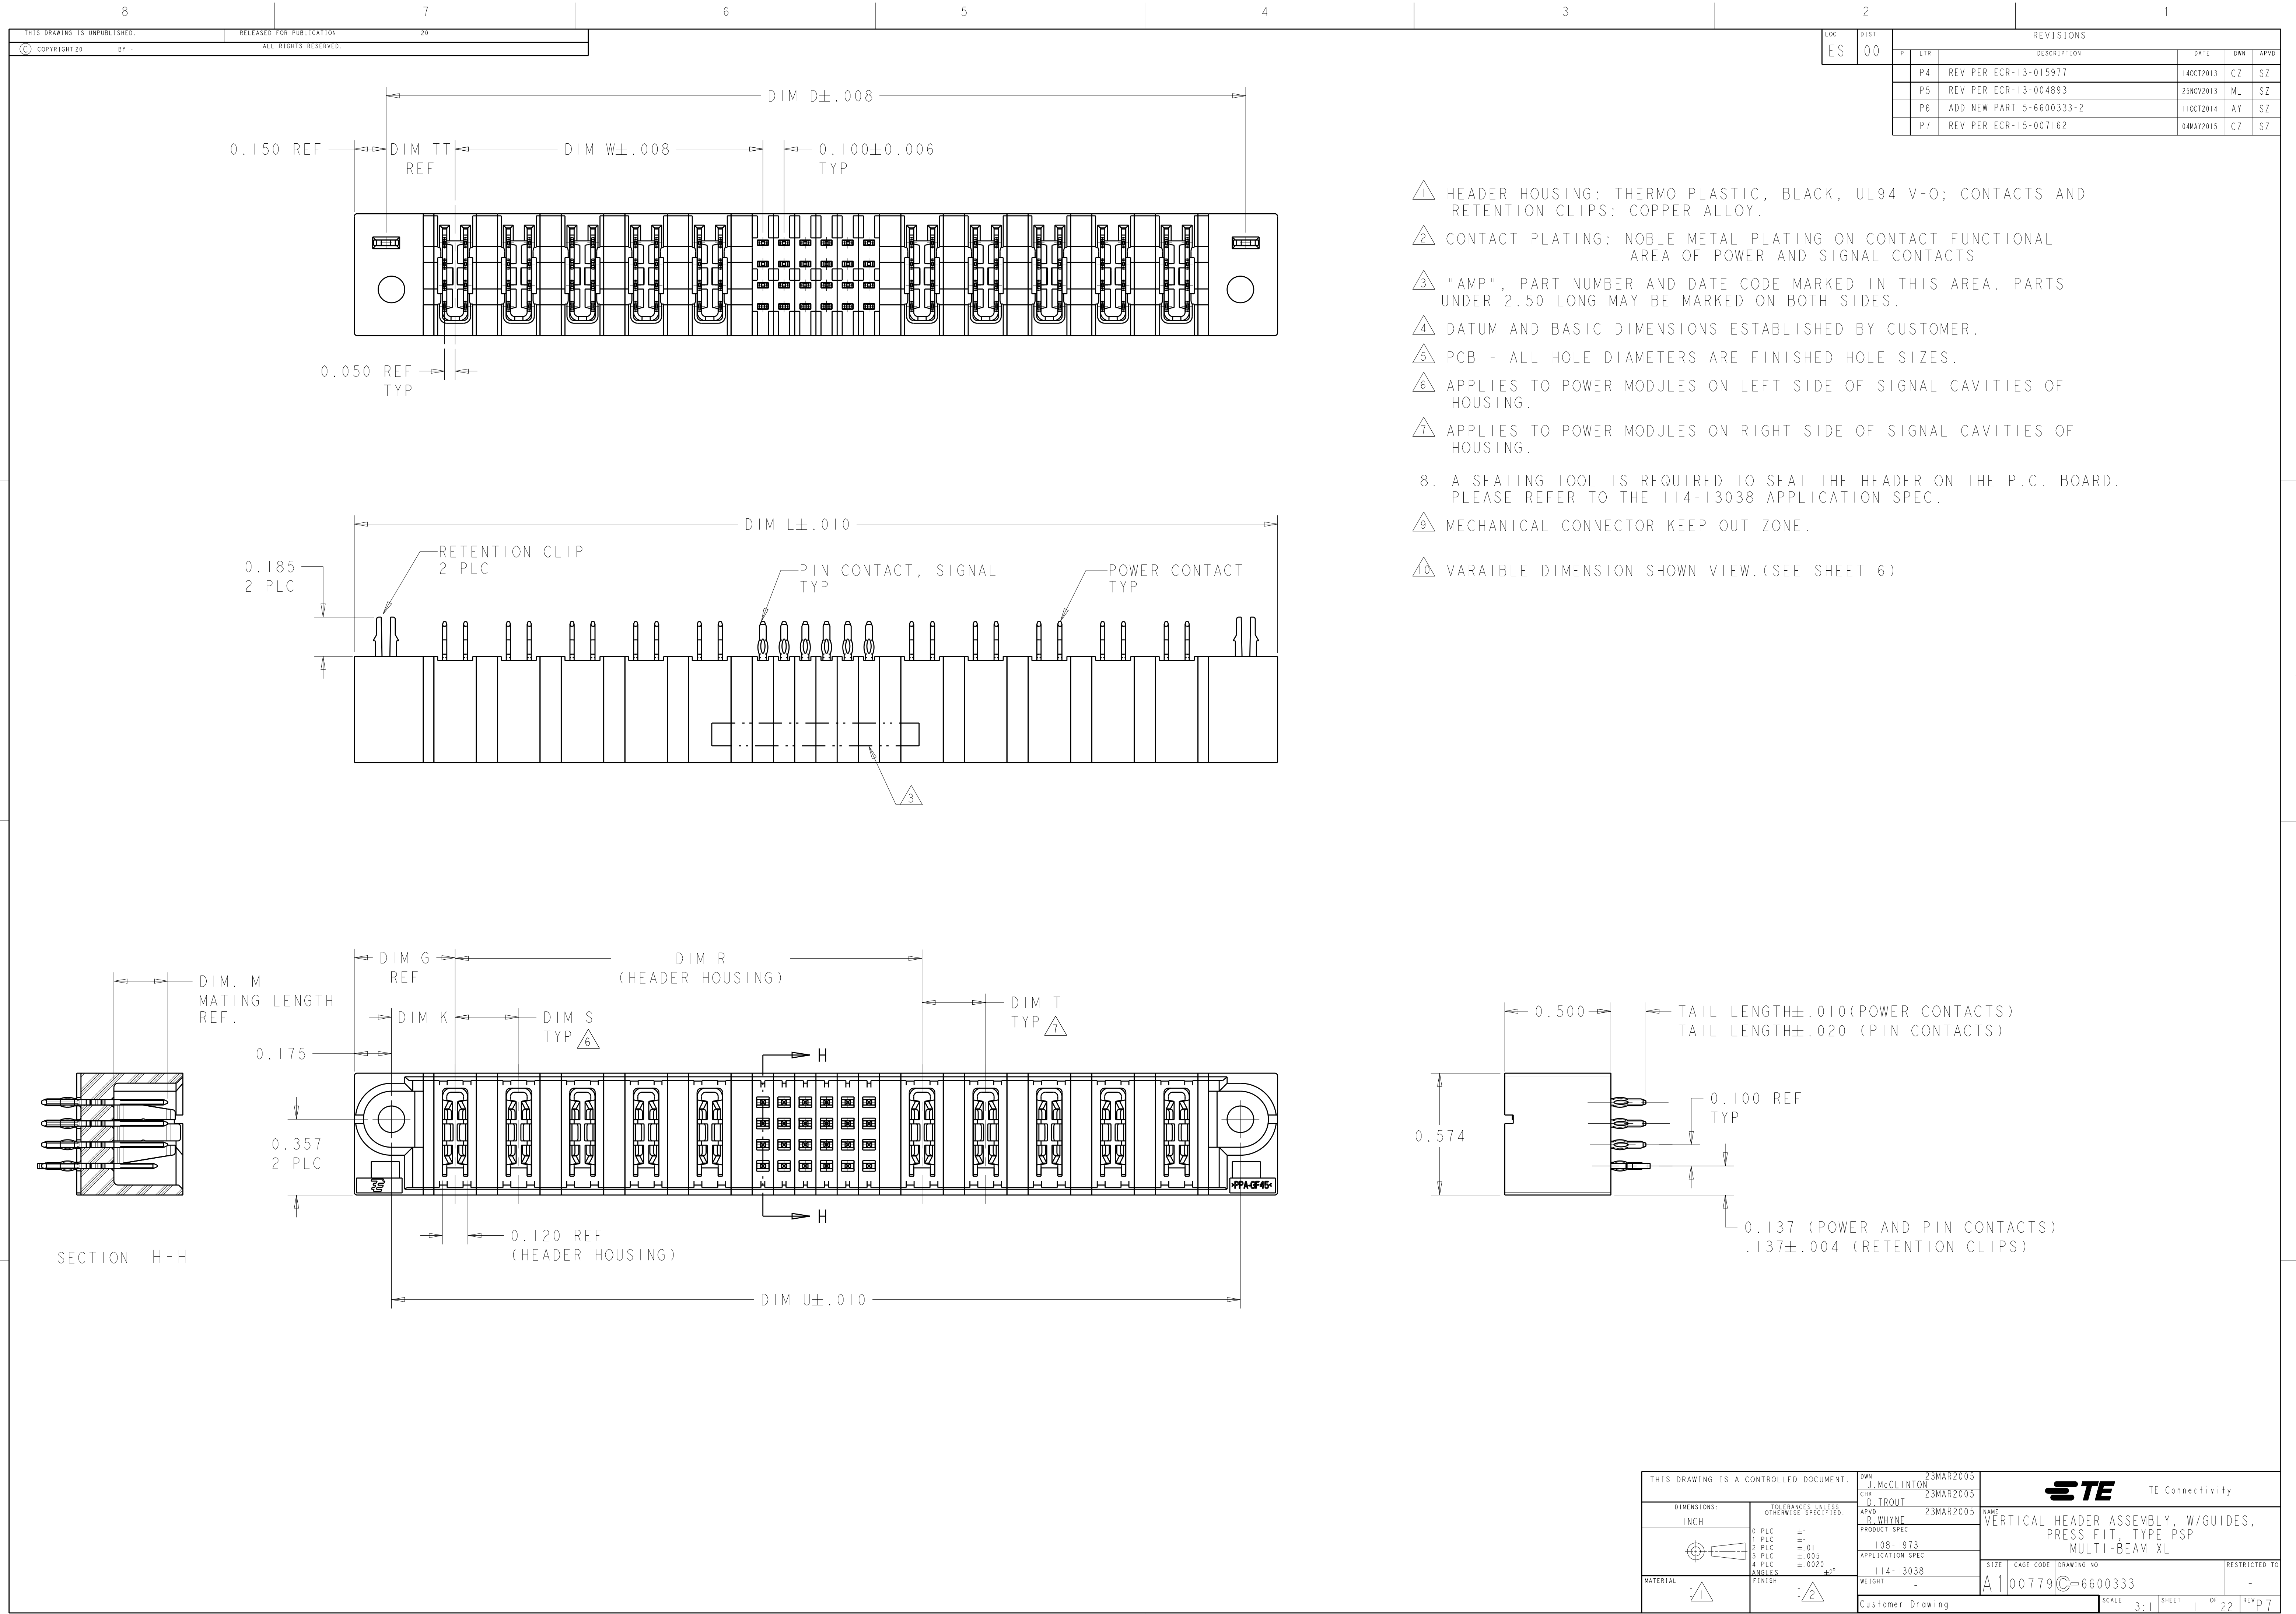


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		P4	REV PER ECR-13-015977	14OCT2013	CZ	SZ		
		P5	REV PER ECR-13-004893	25NOV2013	ML	SZ		
		P6	ADD NEW PART 5-6600333-2	11OCT2014	AY	SZ		
		P7	REV PER ECR-15-007162	04MAY2015	CZ	SZ		

1. HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
2. CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
3. "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
4. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
6. APPLIES TO POWER MODULES ON LEFT SIDE OF SIGNAL CAVITIES OF HOUSING.
7. APPLIES TO POWER MODULES ON RIGHT SIDE OF SIGNAL CAVITIES OF HOUSING.
8. A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13038 APPLICATION SPEC.
9. MECHANICAL CONNECTOR KEEP OUT ZONE.
10. VARAIBLE DIMENSION SHOWN VIEW.(SEE SHEET 6)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. WHYNE 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
0 PLC $\pm .$		PRODUCT SPEC	SIZE	
1 PLC $\pm .01$		108-1973	CAGE CODE	
2 PLC $\pm .01$		APPLICATION SPEC	DRAWING NO	
3 PLC $\pm .005$		114-13038	RESTRICTED TO	
4 PLC $\pm .0020$		WEIGHT	A100779C=6600333	
ANGLES $\neq 2^\circ$		Customer Drawing	SCALE 3:1 SHEET 1 OF 22 REV P7	
FINISH				

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

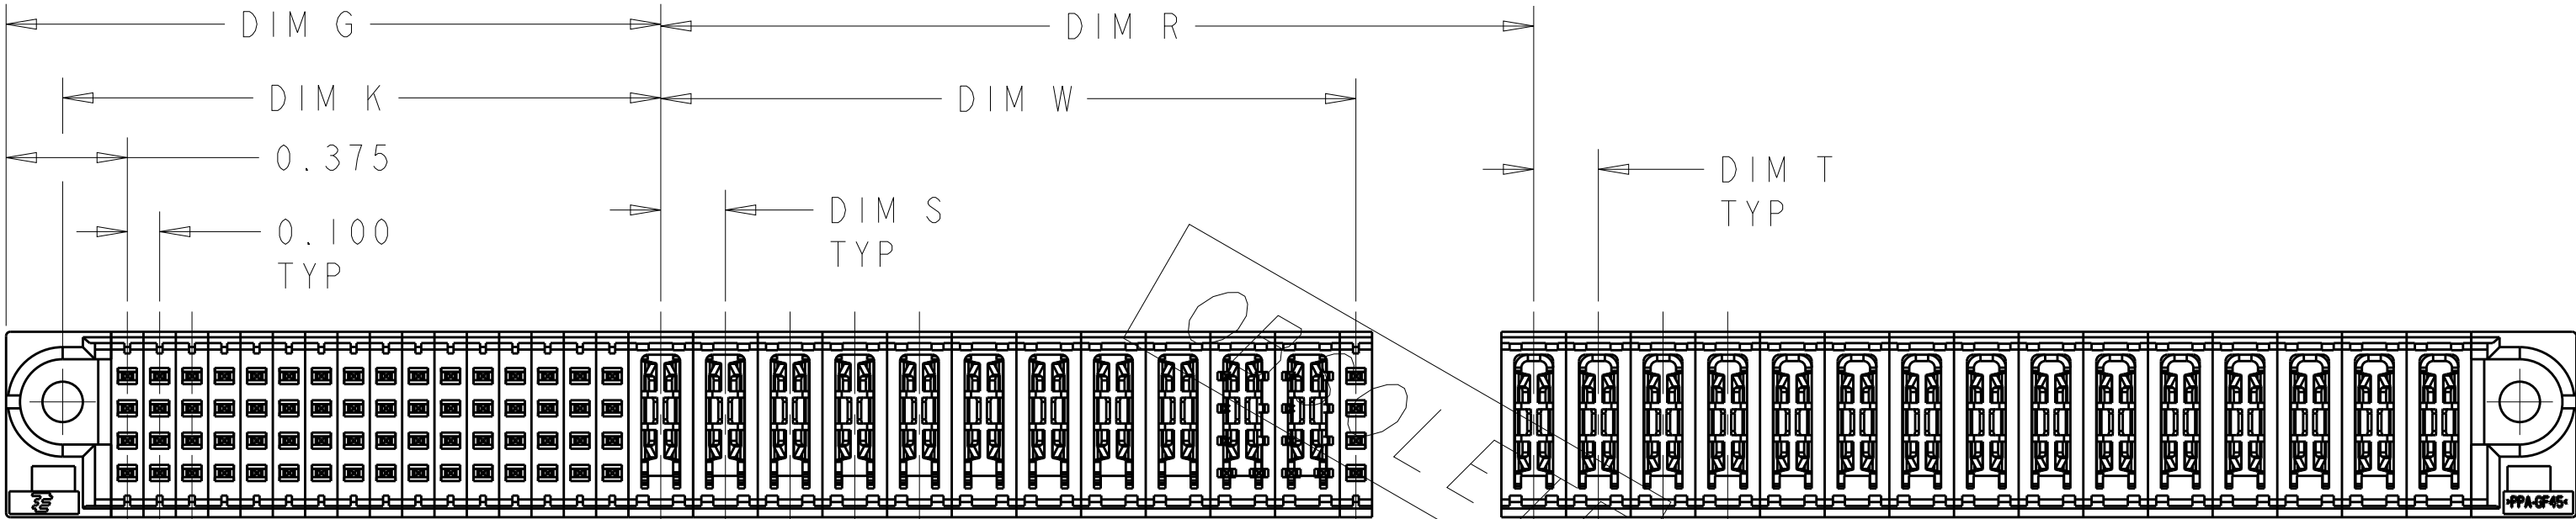

PART NUMBER 2-6600333-3
UNSPECIFIED REFER TO TEH SHEET 1

P6	.300	.425	2.500	.250	.250	1.700	2.850	.275	.450	2.550	NO	2P + 48S + 2P	5-6600333-2
	.300	1.425	4.250	.250	.250	2.700	4.600	.275	.450	4.300	NO	6P + 48S + 5P	5-6600333-1
P1	.300	.425	2.400	.250	.250	1.100	2.750	.275	.450	2.450	NO	2P + 24S + 4P	5-6600333-0
	.300	.175	1.100	-	-	.550	1.450	.275	.450	1.150	YES	1P + 12S + 1P	4-6600333-9
N7	.300	1.225	4.000	.250	.250	2.200	4.350	.275	.450	4.057	NO	5P + 24S + 6P	4-6600333-8
	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
N3	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S+ 2ACP	4-6600333-5
N5	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	4-6600333-4
	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S + 2ACP	4-6600333-3
N4	.300	1.925	4.700	.250	.250	2.400	5.050	.275	.450	4.750	YES	8P + 16S + 8P	4-6600333-2
	.300	.425	1.600	.250	.250	.800	1.950	.275	.450	1.650	YES	2P + 12S + 2P	4-6600333-1
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	3-6600333-9
	.300	1.425	3.500	.250	.250	1.700	3.850	.275	.450	3.550	YES	6P + 8S + 6P	3-6600333-8
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	3-6600333-7
	.300	.925	3.700	.250	.250	2.400	4.050	.275	.450	3.750	NO	4P + 56S + 4P	3-6600333-6
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	3-6600333-5
	.300	.925	2.500	.250	.250	1.200	2.850	.275	.450	2.550	YES	4P + 8S + 4P	3-6600333-4
	.300	.925	2.700	.250	.250	1.400	3.050	.275	.450	2.750	NO	4P + 16S + 4P	3-6600333-3
	.300	.925	2.900	.250	.250	1.600	3.250	.275	.450	2.950	NO	4P + 24S + 4P	3-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	3-6600333-1
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	3-6600333-0
	.300	.425	2.100	-	.250	1.300	2.450	.275	.450	2.150	YES	2P + 32S + 2P	2-6600333-9
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-8
	.300	.975	3.250	.250	.250	1.700	3.600	.275	.450	3.300	YES	4P + 24S + 5P	2-6600333-7
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	2-6600333-6
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-5
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-4
ETE	1.875	2.150	7.600	.200	.200	2.700	7.950	1.850	2.025	7.650	YES	64S+11P+20S+15P	2-6600333-3
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	2-6600333-1
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	1-6600333-6
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-5
	.300	.975	3.200	.250	.250	1.900	3.550	.275	.450	3.250	YES	4P + 32S + 4P	1-6600333-4
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-3
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	1-6600333-2
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	1-6600333-1
	.300	.475	1.800	.250	.250	1.000	2.150	.275	.450	1.850	YES	2P + 16S + 2P	1-6600333-0
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	6600333-9
	.300	.425	3.250	-	.250	2.700	3.600	.275	.450	3.300	YES	2P + 88S + 1P	6600333-8
	.300	.725	2.300	.250	.250	1.250	2.650	.275	.450	2.350	YES	3P + 16S + 3P	6600333-7
	.300	.975	3.000	.250	.250	1.700	3.350	.275	.450	3.050	YES	4P + 24S + 4P	6600333-6
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	6600333-5
	.300	.425	1.700	.250	.250	.900	2.050	.275	.450	1.750	YES	2P + 16S + 2P	6600333-4
	.325	1.450	4.000	.300	.300	2.200	4.350	.300	.475	4.050	YES	5ACP + 24S + 5ACP	6600333-1
	DIM "TT"	DIM "W"	DIM "U"	DIM "T"	DIM "S"	DIM "R"	DIM "L"	DIM "K"	DIM "G"	DIM "D"	RETENTION CLIP	DESCRIPTION	PART NO

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

J. McCLINTON

23MAR2005

DIMENSIONS:

INCH

0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.0020 FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.0020 FINISH

MATERIAL

-

CHK

D. TROUT

23MAR2005

APVD

R. WHYNE

23MAR2005

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

NAME

VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE

CAGE CODE

DRAWING NO

100779

©=6600333

RESTRICTED TO

-

SCALE

3:1

SHEET

2

OF

22

REV

P7

TE Connectivity

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.
COPYRIGHT 20 BY -

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC
ES

DIST
00

REVISIONS

P	LYR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER					SIGNAL						POWER					
		P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
6600333-1	D	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	
	C						EV	EV	EV	EV	EV	EV						
	B						EV	EV	EV	EV	EV	EV						
	A						ES	ES	ES	ES	ES	ES						
5ACP+24S+5ACP		HD																HD

RECOMMENDED PCB LAYOUT 6600333-1
SCALE 2:1

PART NUMBER	ROWS	POWER		SIGNAL						POWER			
		P1	P2	1	2	3	4	5	6	P3	P4		
6600333-5	D	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM		
	C			EV	EV	EV	EV	EV	EV				
	B			EV	EV	EV	EV	EV	EV				
	A			ES	ES	ES	ES	ES	ES				
2P+24S+2P		HD											HD

RECOMMENDED PCB LAYOUT 6600333-5
SCALE 2:1

PART NUMBER	ROWS	POWER		SIGNAL				POWER			
		P1	P2	1	2	3	4	P3	P4		
6600333-4	D	VM	VM	EV	EV	EV	EV	VM	VM		
	C			EV	EV	EV	EV				
	B			EV	EV	EV	EV				
	A			EV	EV	EV	EV				
2P+16S+2P		HD									HD

RECOMMENDED PCB LAYOUT 6600333-4
SCALE 2:1

PART NUMBER	ROWS	POWER				SIGNAL						POWER					
		P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8		
6600333-6	D	VM	VM	VM	VM	ES	ES	ES	ES	EV	ES	VM	VM	VM	VM		
	C					ES	ES	ES	ES	EV	ES						
	B					ES	ES	ES	ES	EV	ES						
	A					ES	ES	EV	ES	EV	ES						
4P+24S+4P		HD															HD

RECOMMENDED PCB LAYOUT 6600333-6
SCALE 2:1

		RETENTION CLIP	HD
-	-	SIGNAL CONTACT .165 TAIL LENGTH	ES
.204	MLBF	SIGNAL CONTACT .165 TAIL LENGTH	EV
.254	STANDARD	POWER CONTACT .165 TAIL LENGTH	VM
-	-		
DIM. M REFERENCE	MATING SEQUENCE	DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±"
1 PLC	±.01
2 PLC	±.01
3 PLC	±.005
4 PLC	±.0020
ANGLES	±2°
FINISH	-

MATERIAL

-

DWN
J. McCLINTON
CHK
D. TROUT
APVD
R. WHYNE

23MAR2005
23MAR2005

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES,
PRESS FIT, TYPE PSP
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
6600333

RESTRICTED TO
-

SCALE
3:1


SHEET
3

OF
22

REV
P7

4805 (3/11)


PART NUMBER	ROWS		POWER	SIGNAL					POWER	
			P1	1	2	3	4	P2		
6600333-9	D		VM	ES	EV	ES	EV	VM		
	C			EV	EV	EV	EV			
	B			ES	EV	ES	EV			
	A			ES	EV	ES	EV			
IP+16S+IP		HD								HD

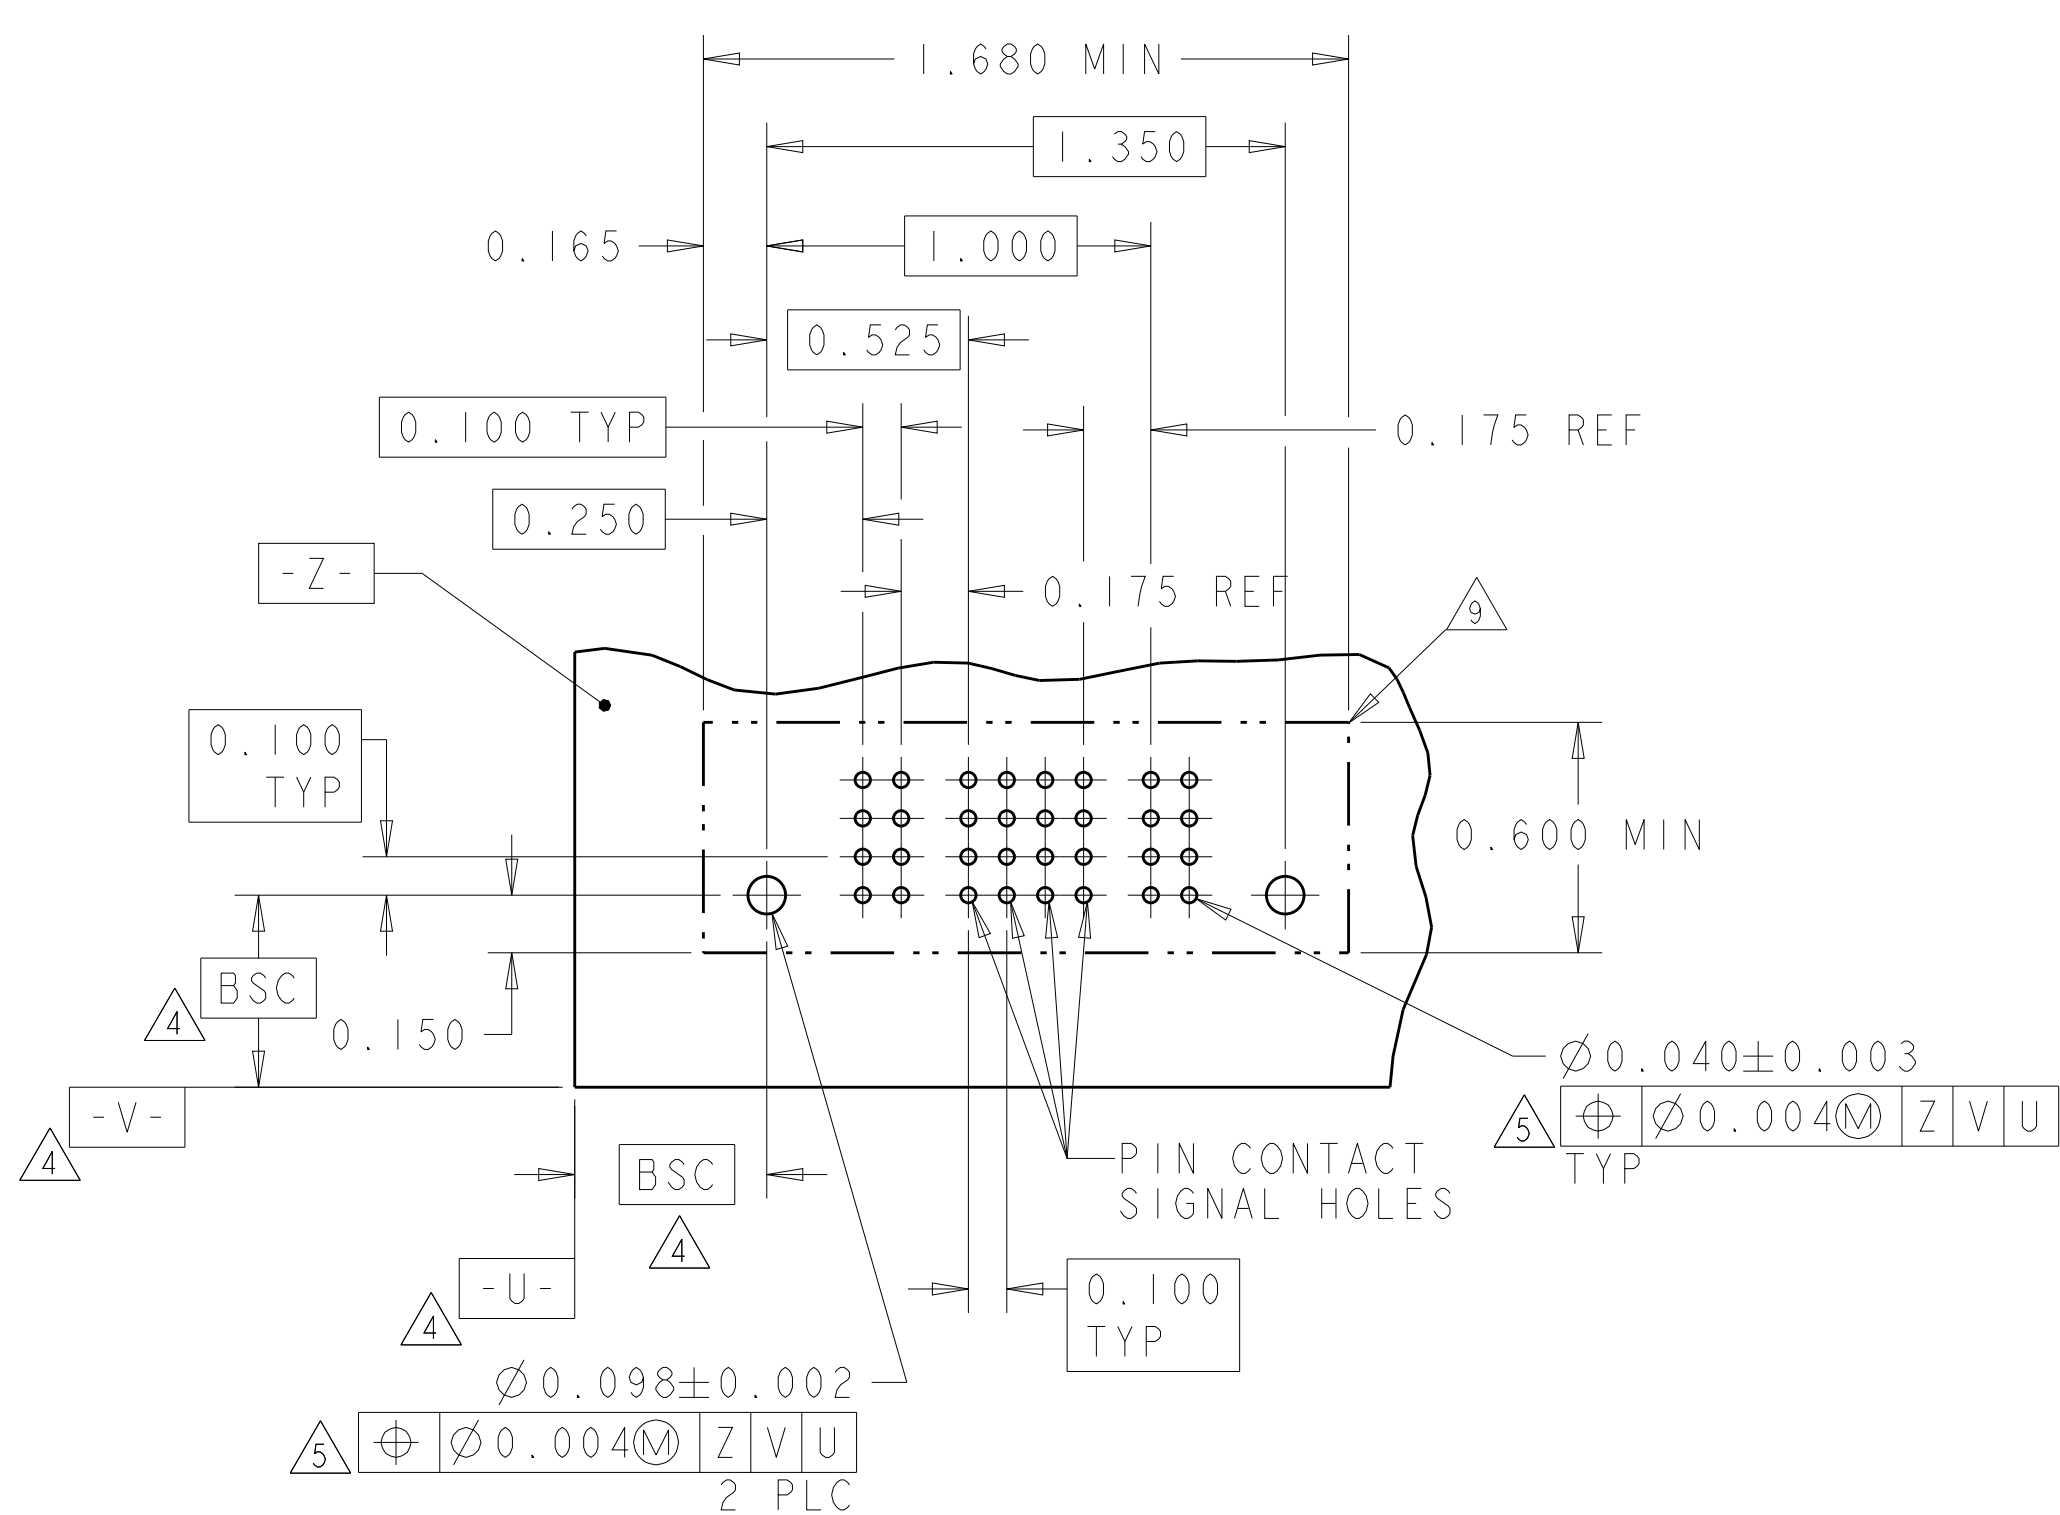


RECOMMENDED PCB LAYOUT 6600333-9
SCALE 2:1


PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
3-6600333-0	D		VM	ES	EV	EV	ES	VM	
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
IP+16S+IP		HD							HD



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON	23MAR2005		TE Connectivity	
		CHK D. TROUT	23MAR2005			
		AVER R. WHYNE	23MAR2005		NAM VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED:				
		Ø PLG ±. PLG ±. PLG ±.01 PLG ±.005 PLG ±.002 ANGLES °±		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		
MATERIAL	FINISH	WEIGHT		SIZE	CAGE CODE	DRAWING NO
-	-	-		A1	100779	C6600333
Customer Drawing		RESTRICTED TO		SCALE	SHEET	REV
				3:1	4 of 22	P

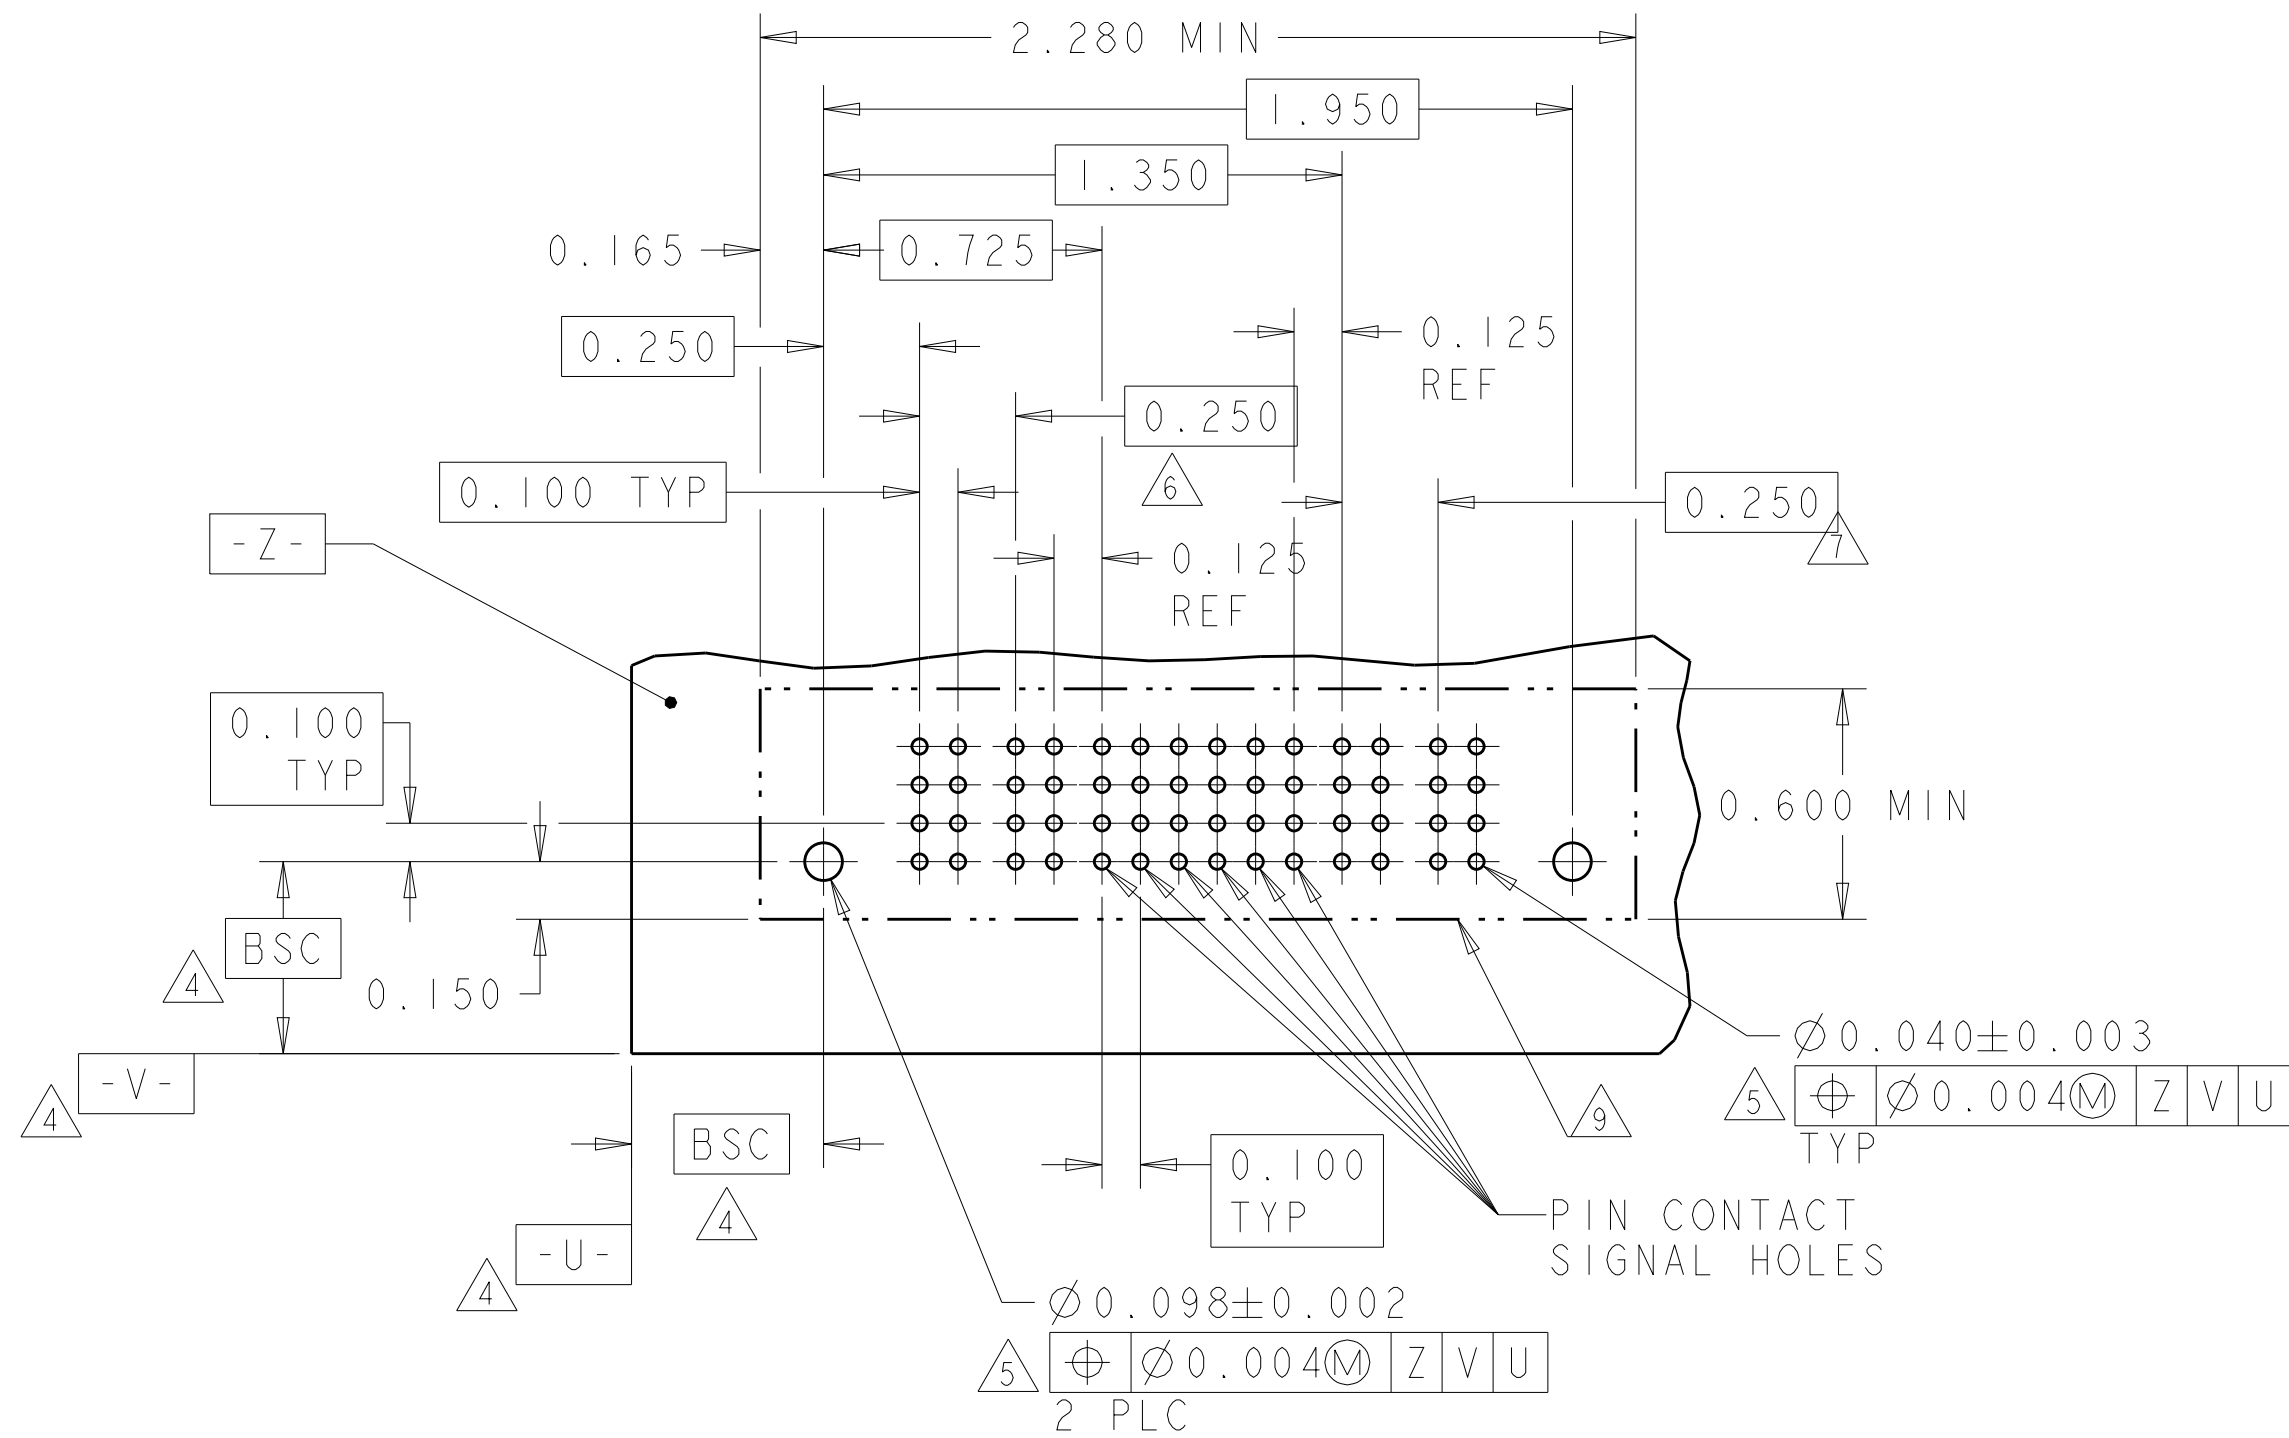[illegible]

RECOMMENDED PCB LAYOUT 1-6600333-2
SCALE 2:1

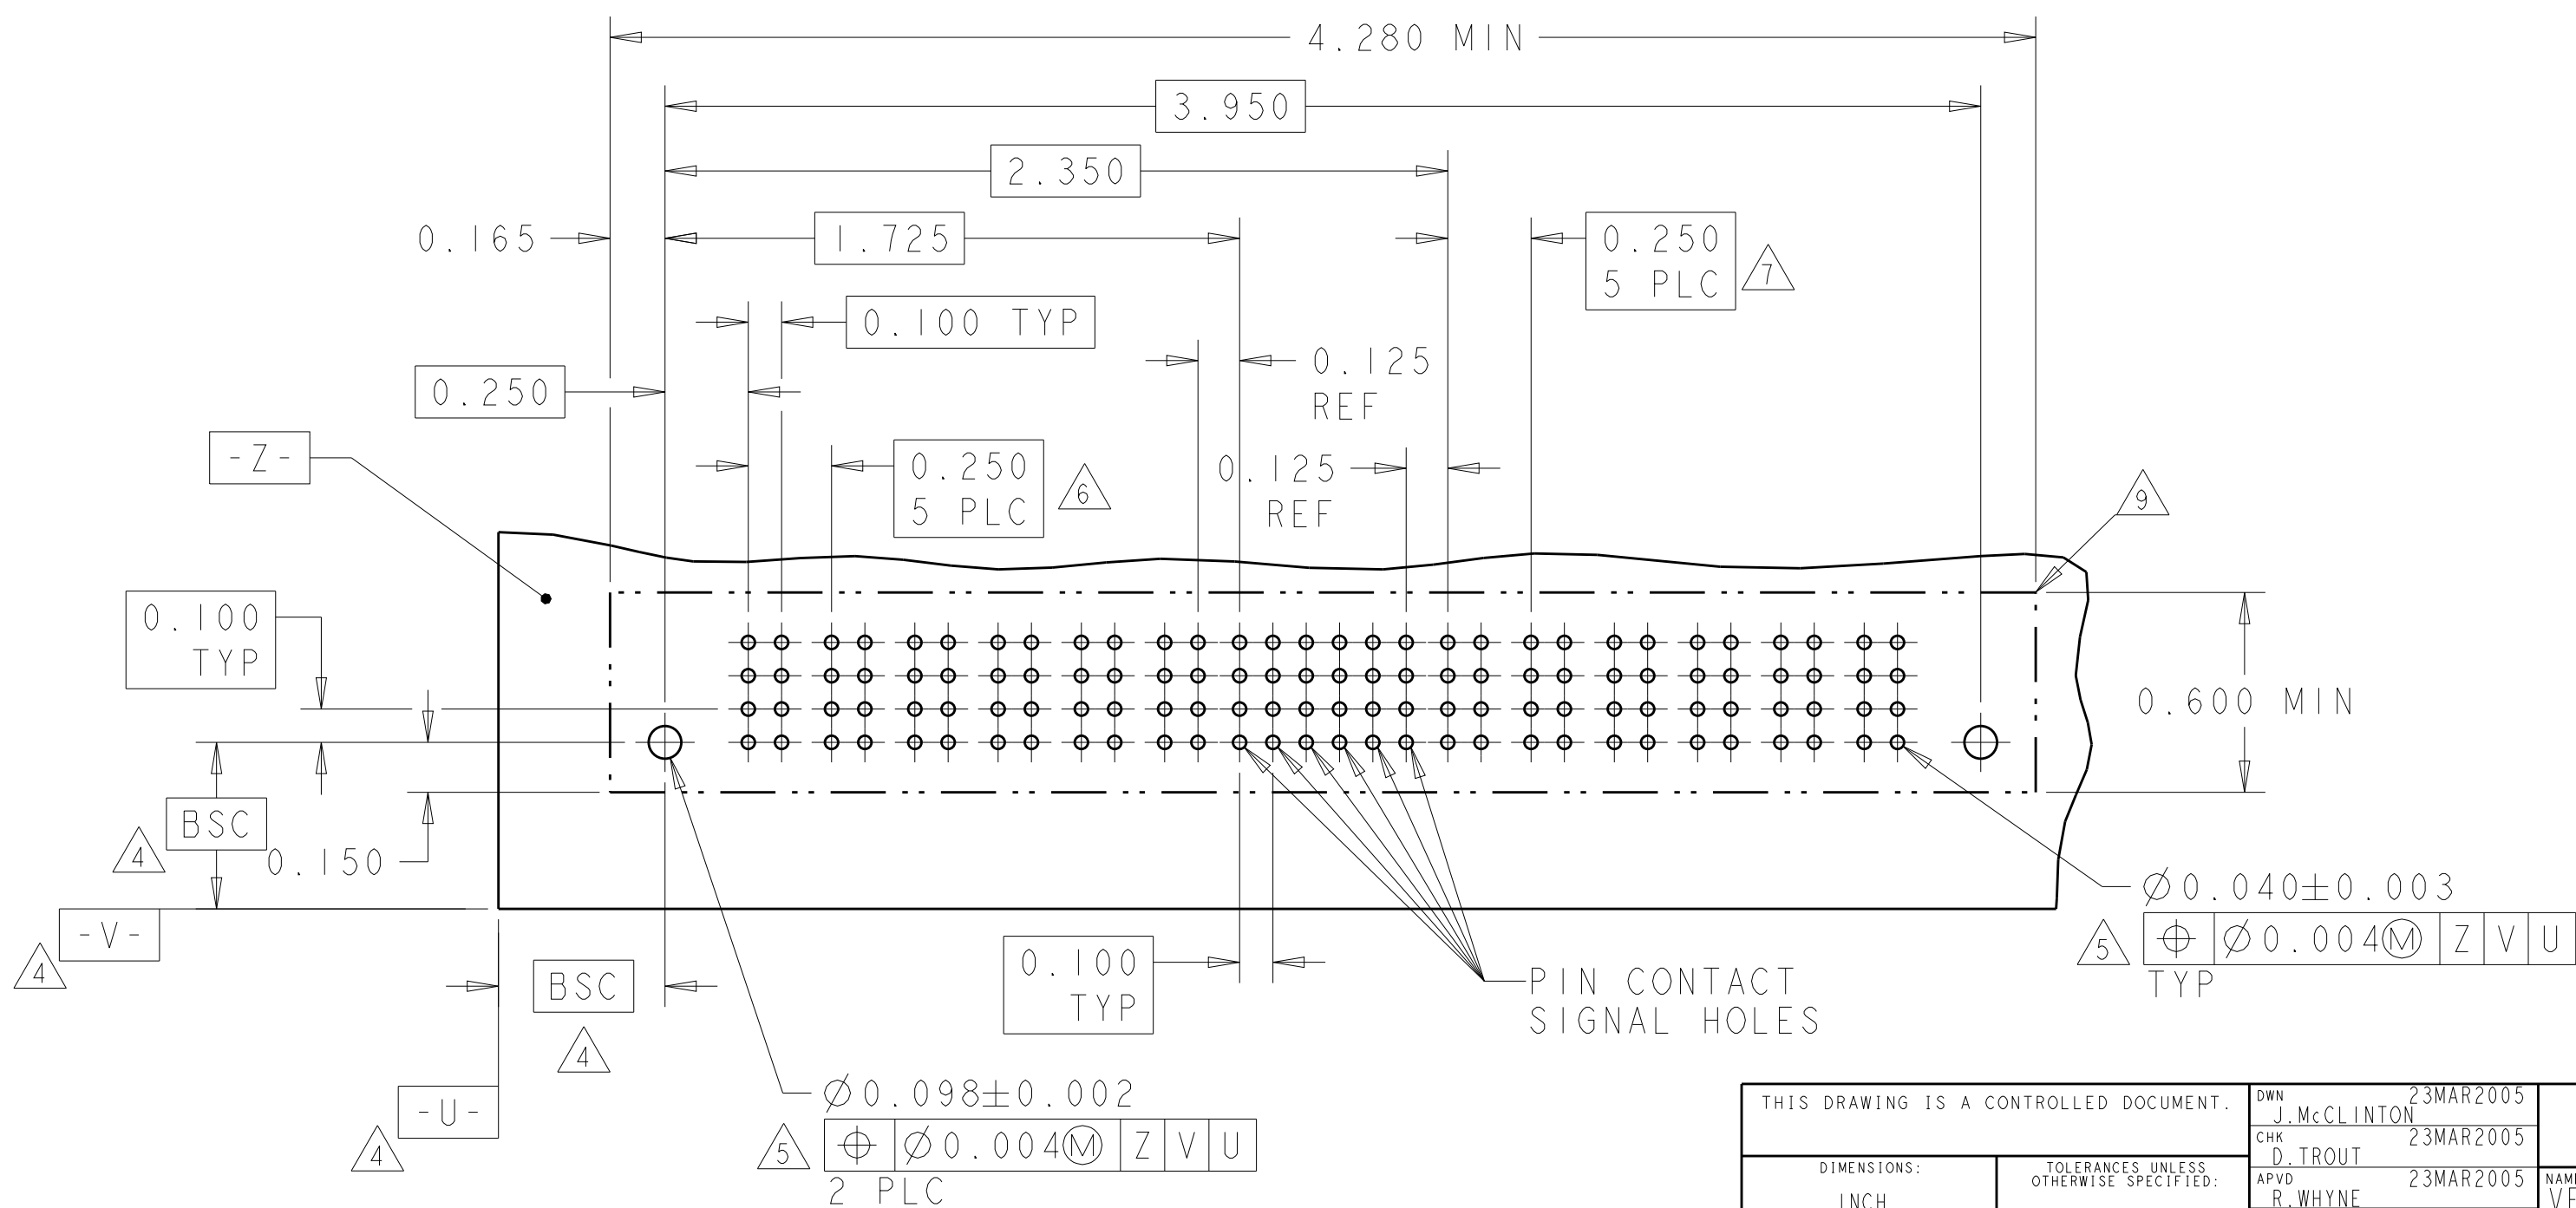[illegible]

RECOMMENDED PCB LAYOUT 1-6600333-3
SCALE 2:1

4805 (3/11)

[illegible]

3.580 MIN

3.250

2.150

1.275

0.165

0.100 TYP

0.175 REF

0.250 3 PLC

0.175 REF

0.250 3 PLC

0.250

-Z-

0.100 TYP

BSC

0.150

-V-

BSC

0.100 TYP

0.098±0.002

Ø 0.004 (M) Z V U

2 PLC

PIN CONTACT SIGNAL HOLE

Ø 0.040±0.003

Ø 0.004 (M) Z V U

TYP

0.600 MIN

6

7

9


4

4




4

5

Figure 1: Recommended PCB layout for the 1-6600333-6 connector. The diagram shows a top-down view of the PCB with dimensions and tolerances. Key features include a central array of 48 pins (8 rows by 6 columns) with a pitch of 0.100 TYP. The overall dimensions are 2.380 MIN (width) and 0.600 MIN (height). Various mounting holes and reference points are indicated with dimensions like 0.165, 0.775, 1.450, 2.050, 0.175 REF, 0.250, 0.100 TYP, 0.150, 0.098, 0.040, and 0.004 M. The layout is labeled "RECOMMENDED PCB LAYOUT 1-6600333-6" and "SCALE 2:1".

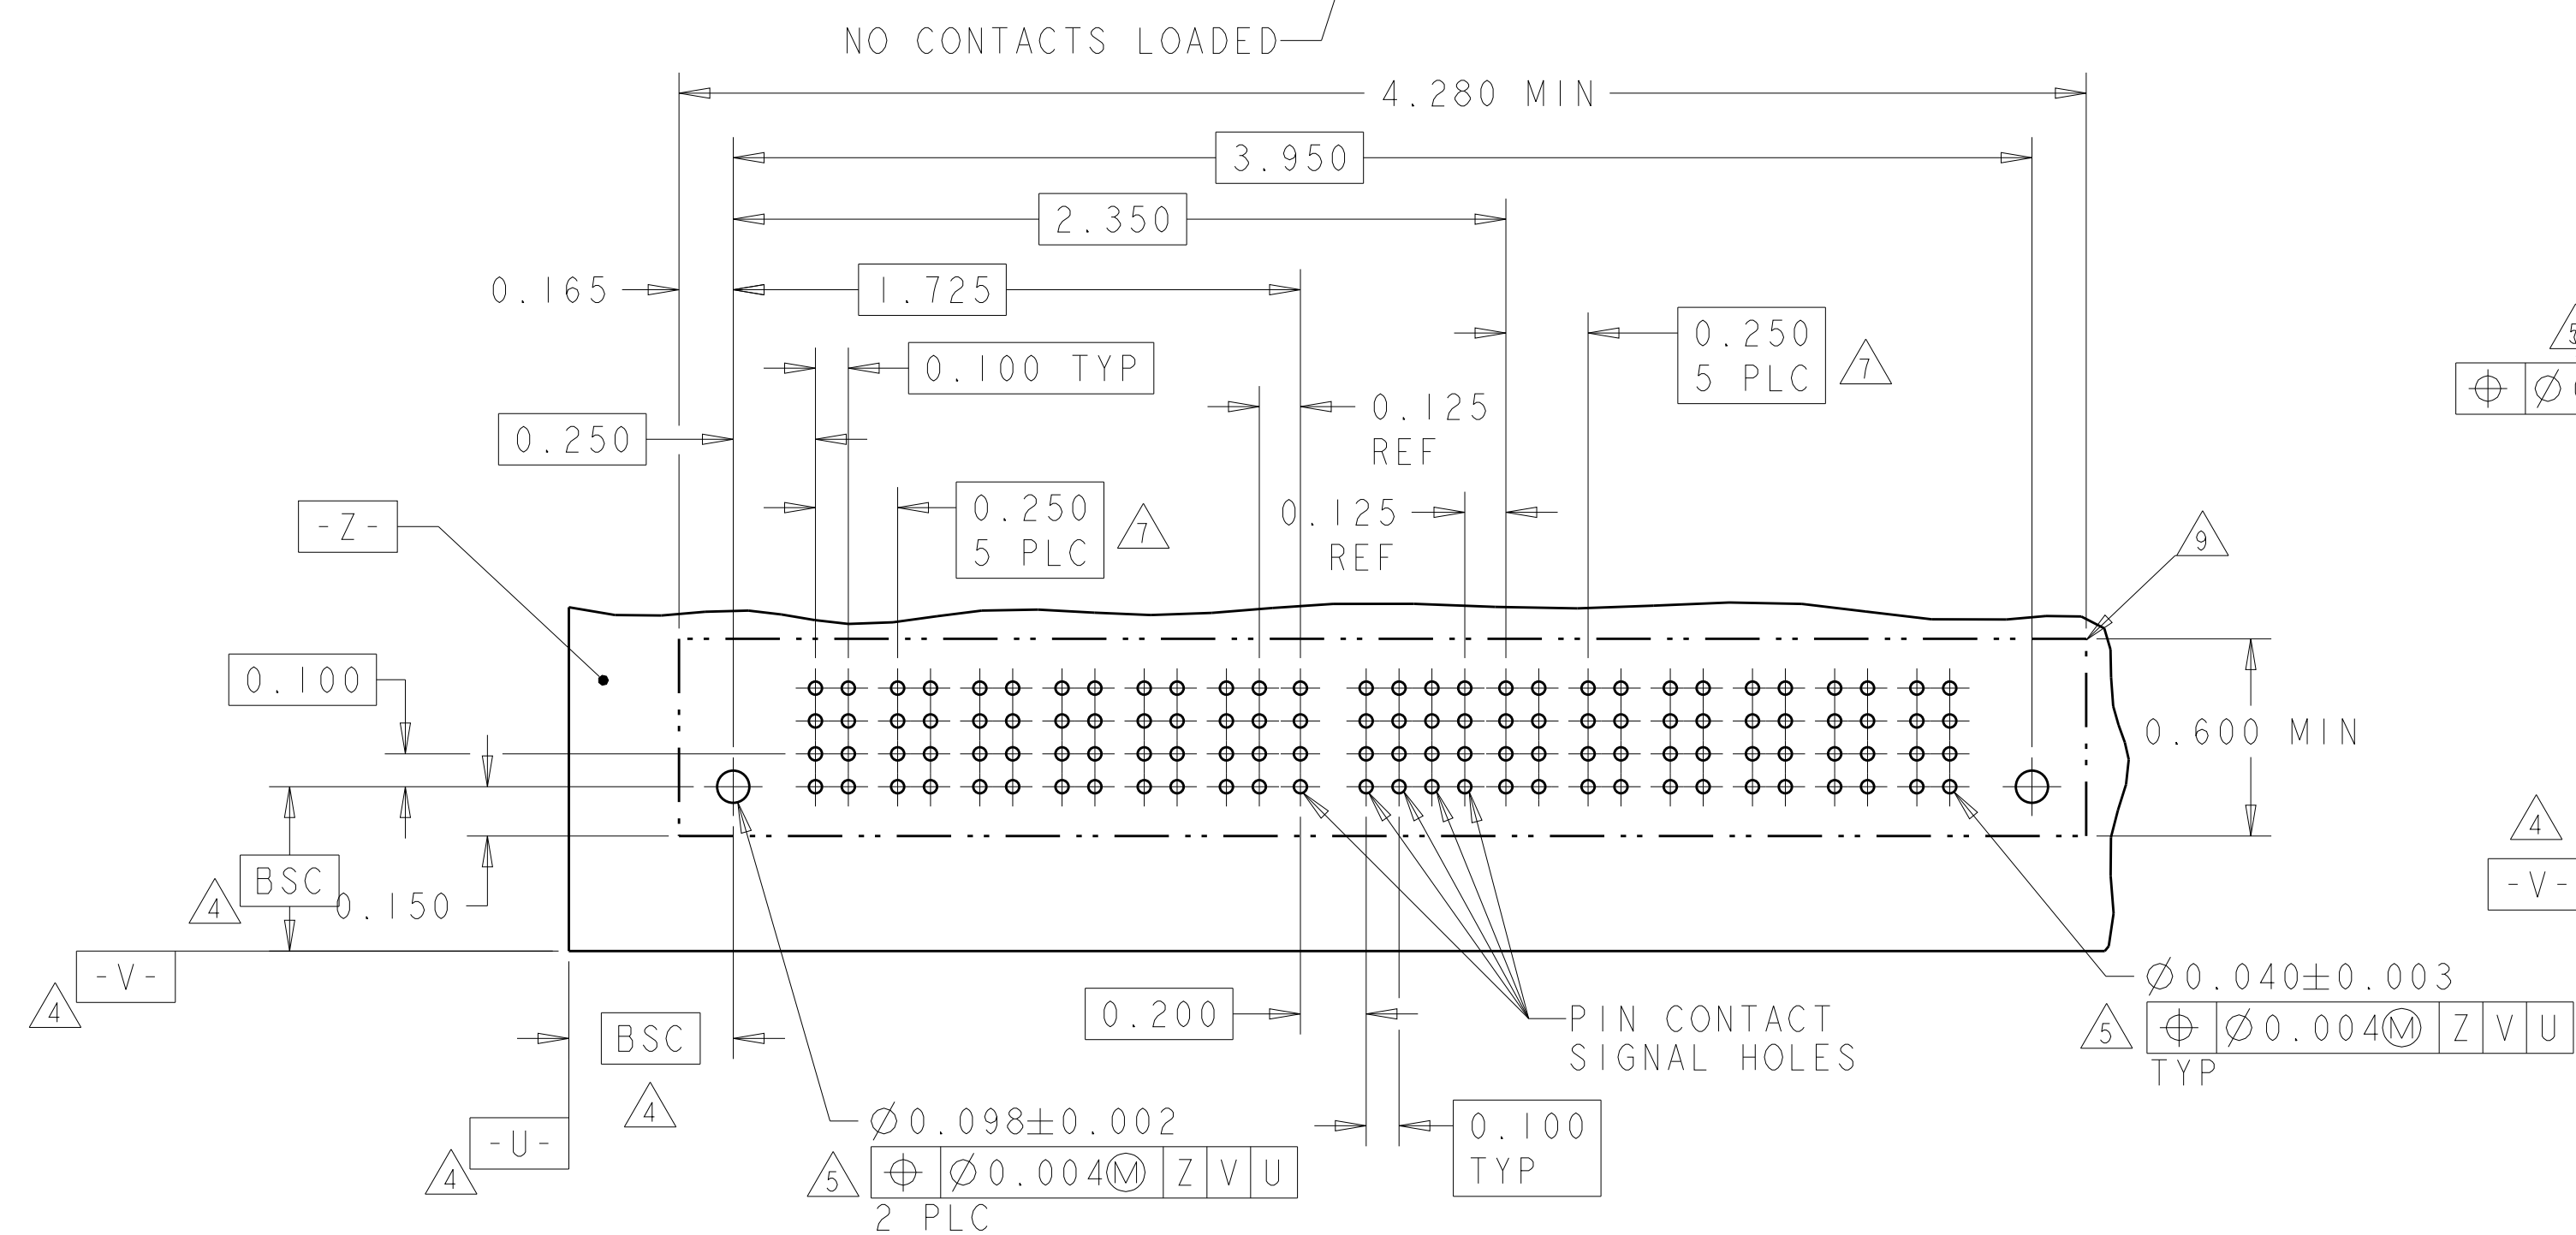[illegible][illegible]4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

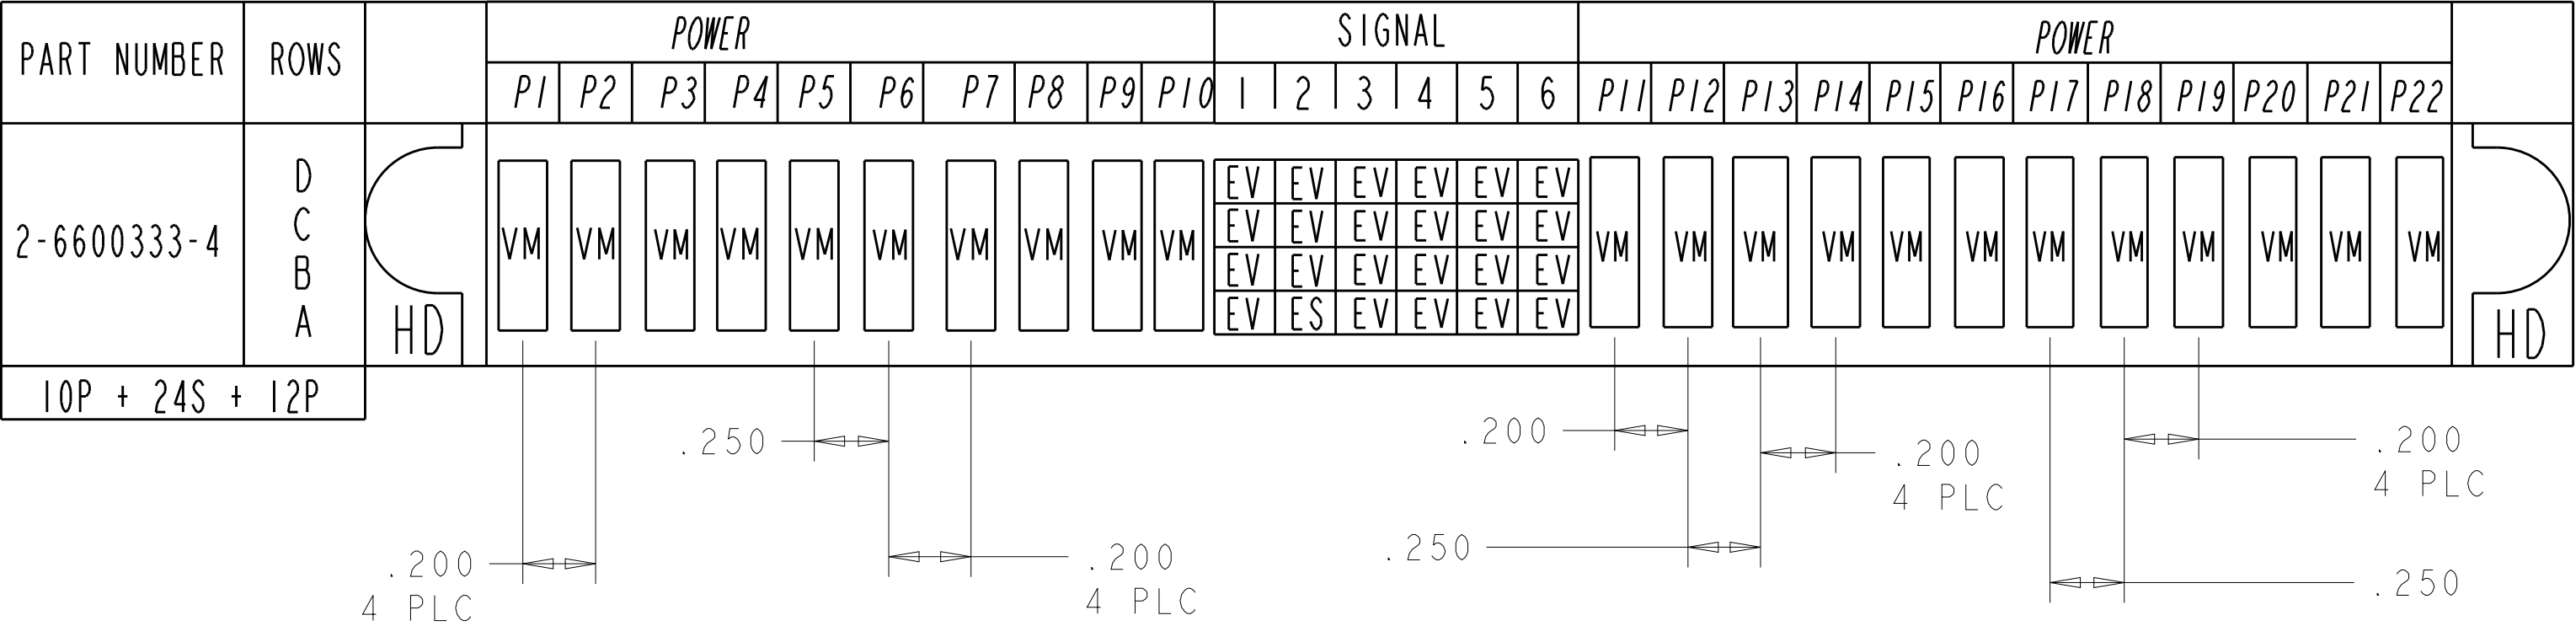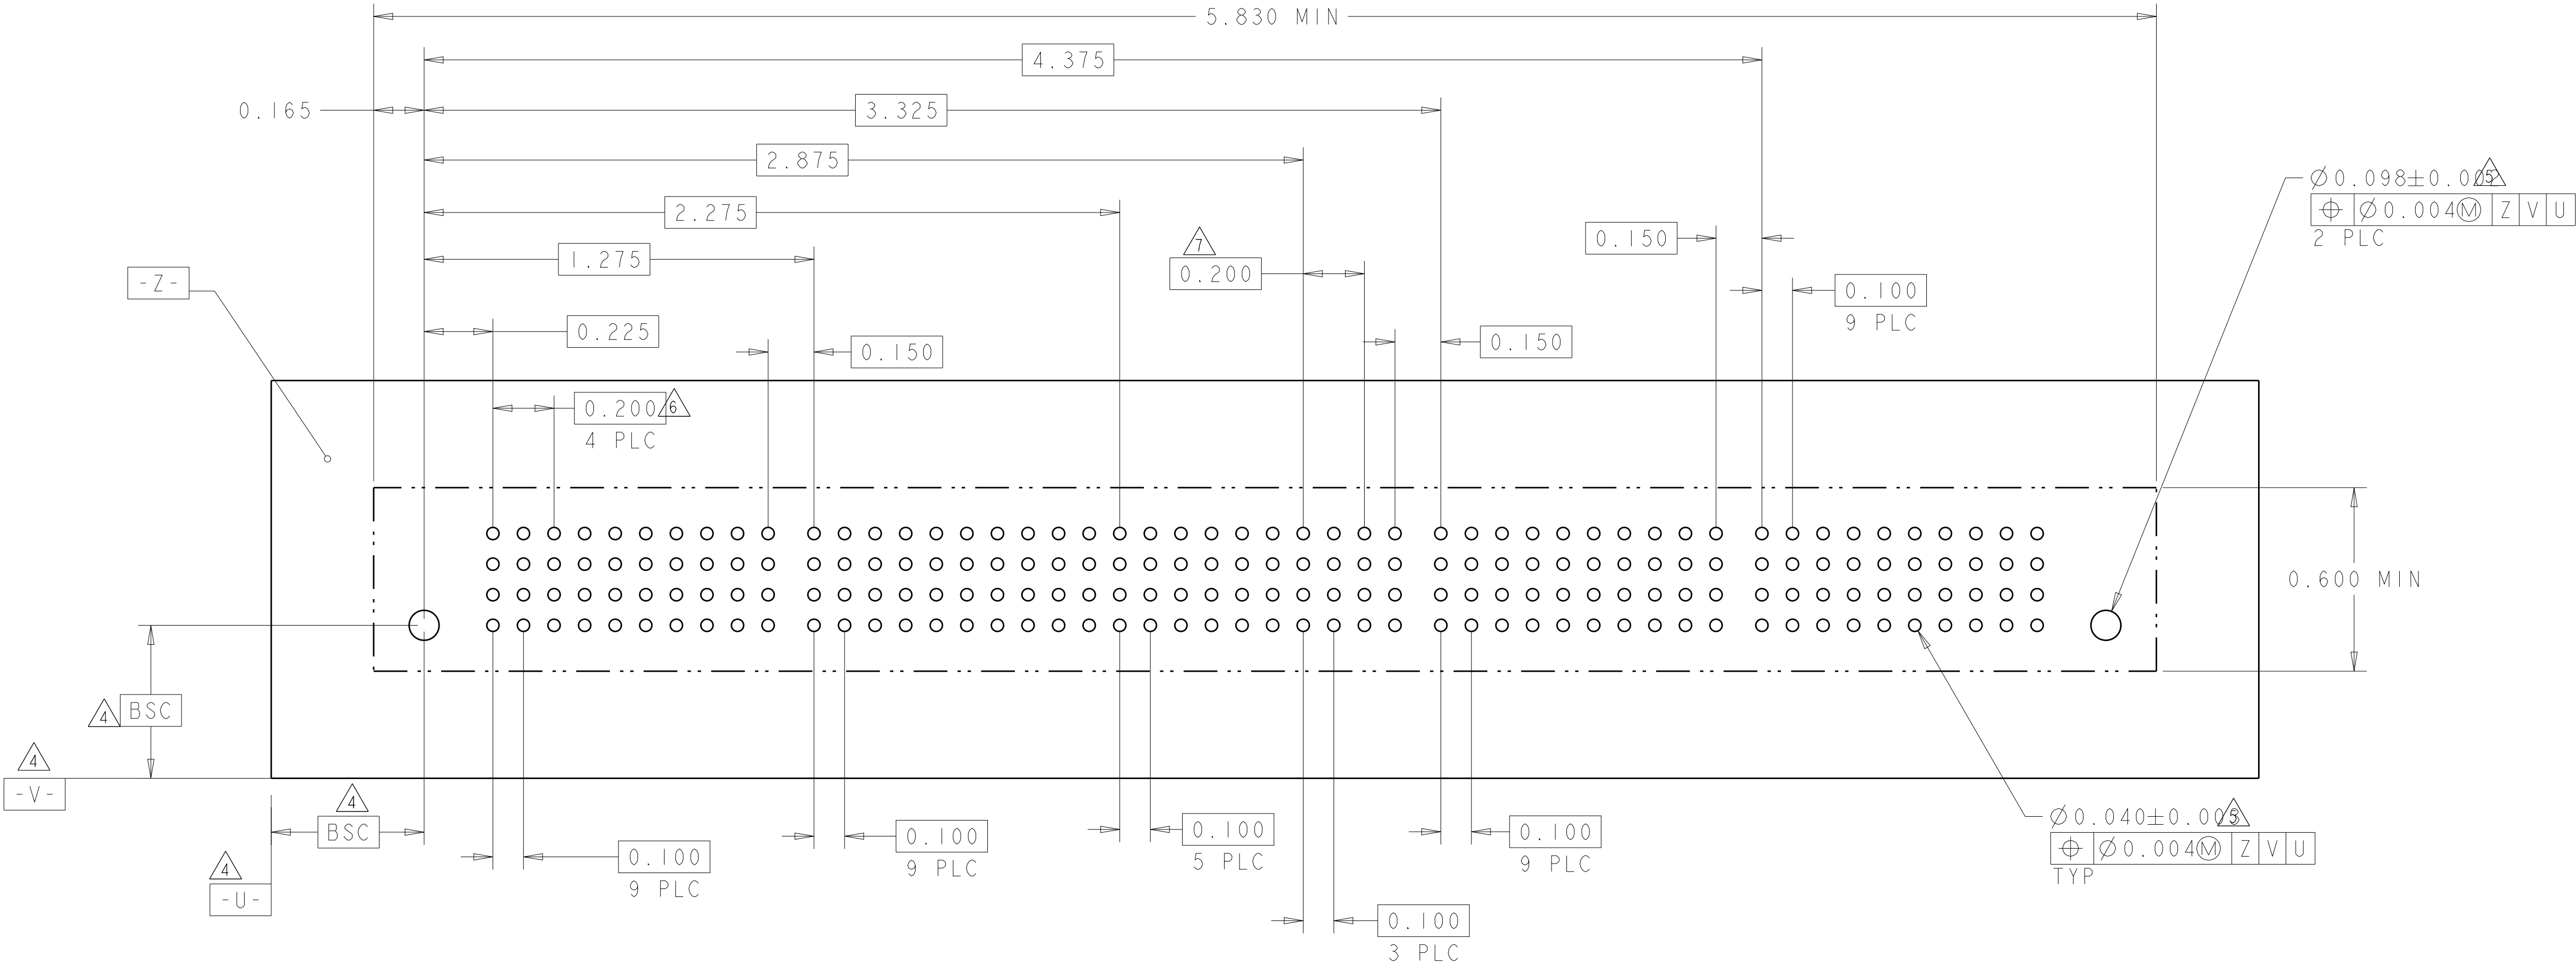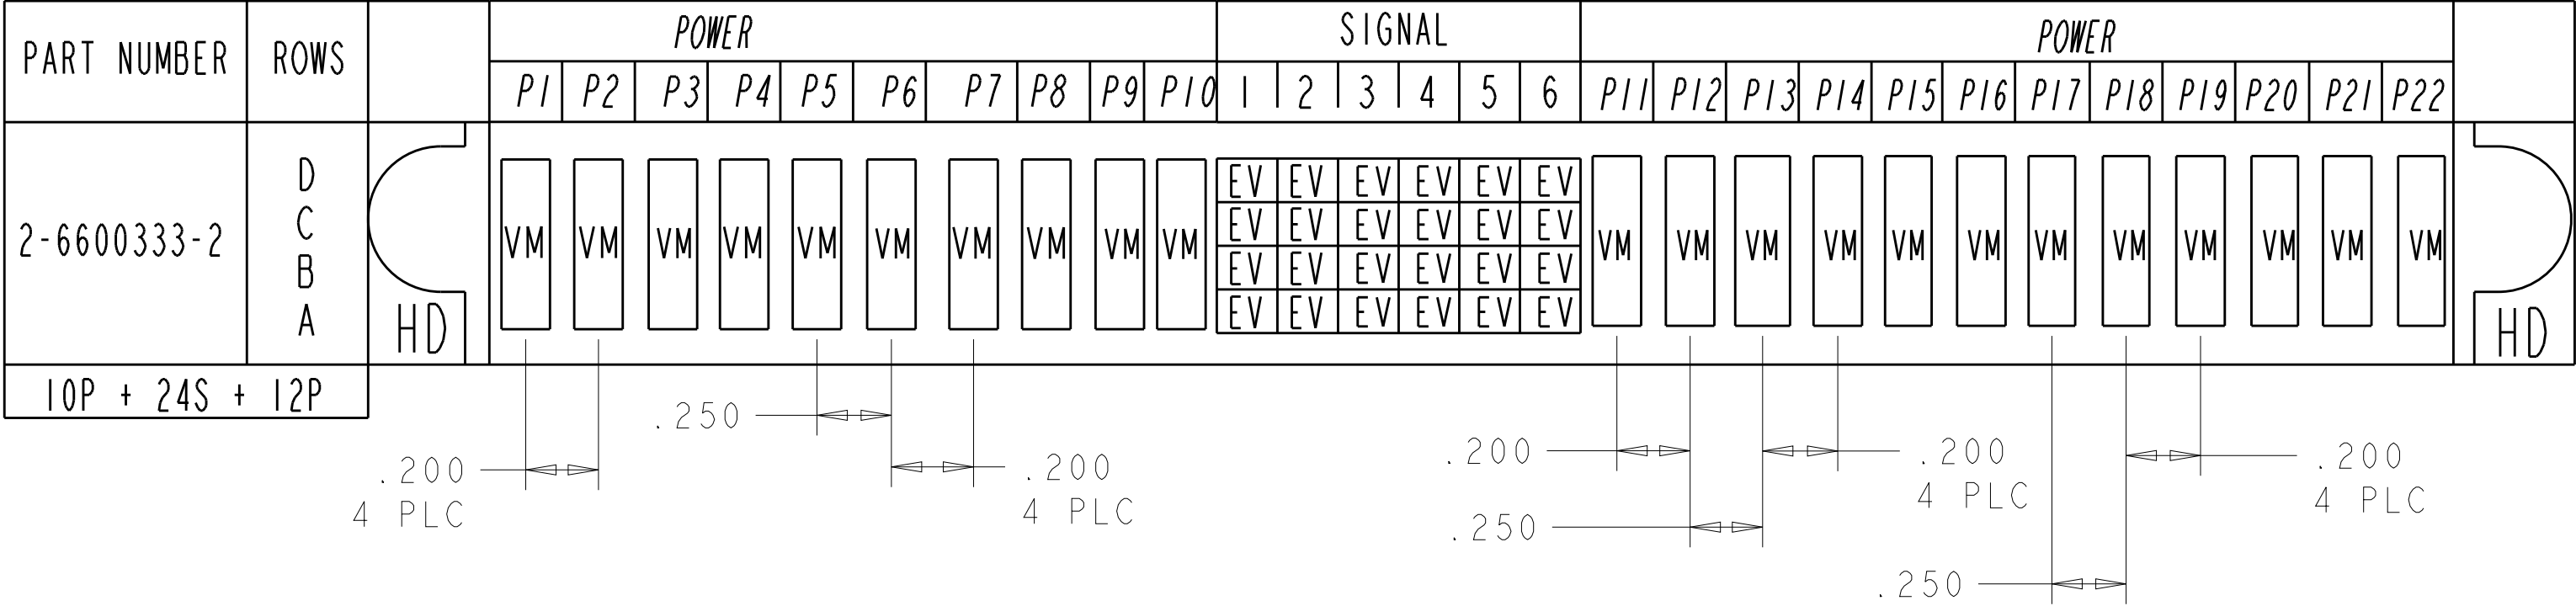

THE PART NUMBER 2-6600333-4 PCB LAYOUT IS SAME AS 2-6600333-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

J. McCLINTON

23MAR2005

CHK

D. TROUT

23MAR2005

APVD

R. WHYNE

23MAR2005

DIMENSIONS:

INCH

0 PLC

±"

1 PLC

±.01

2 PLC

±.01

3 PLC

±.005

4 PLC

±.0020

ANGLES

±2°

FINISH

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

NAME

VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6600333

RESTRICTED TO

-

SCALE

3:1

SHEET

7

OF

22

REV

P7


TE

TE Connectivity


4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	
2-6600333-5	D		VM	VM	VM	VM	EV	EV	EV	EV	VM	VM	VM	
	C						EV	EV	EV	EV				
	B						EV	EV	EV	EV				
	A						ES	EV	EV	EV				
4P+16S+3P		HD												HD

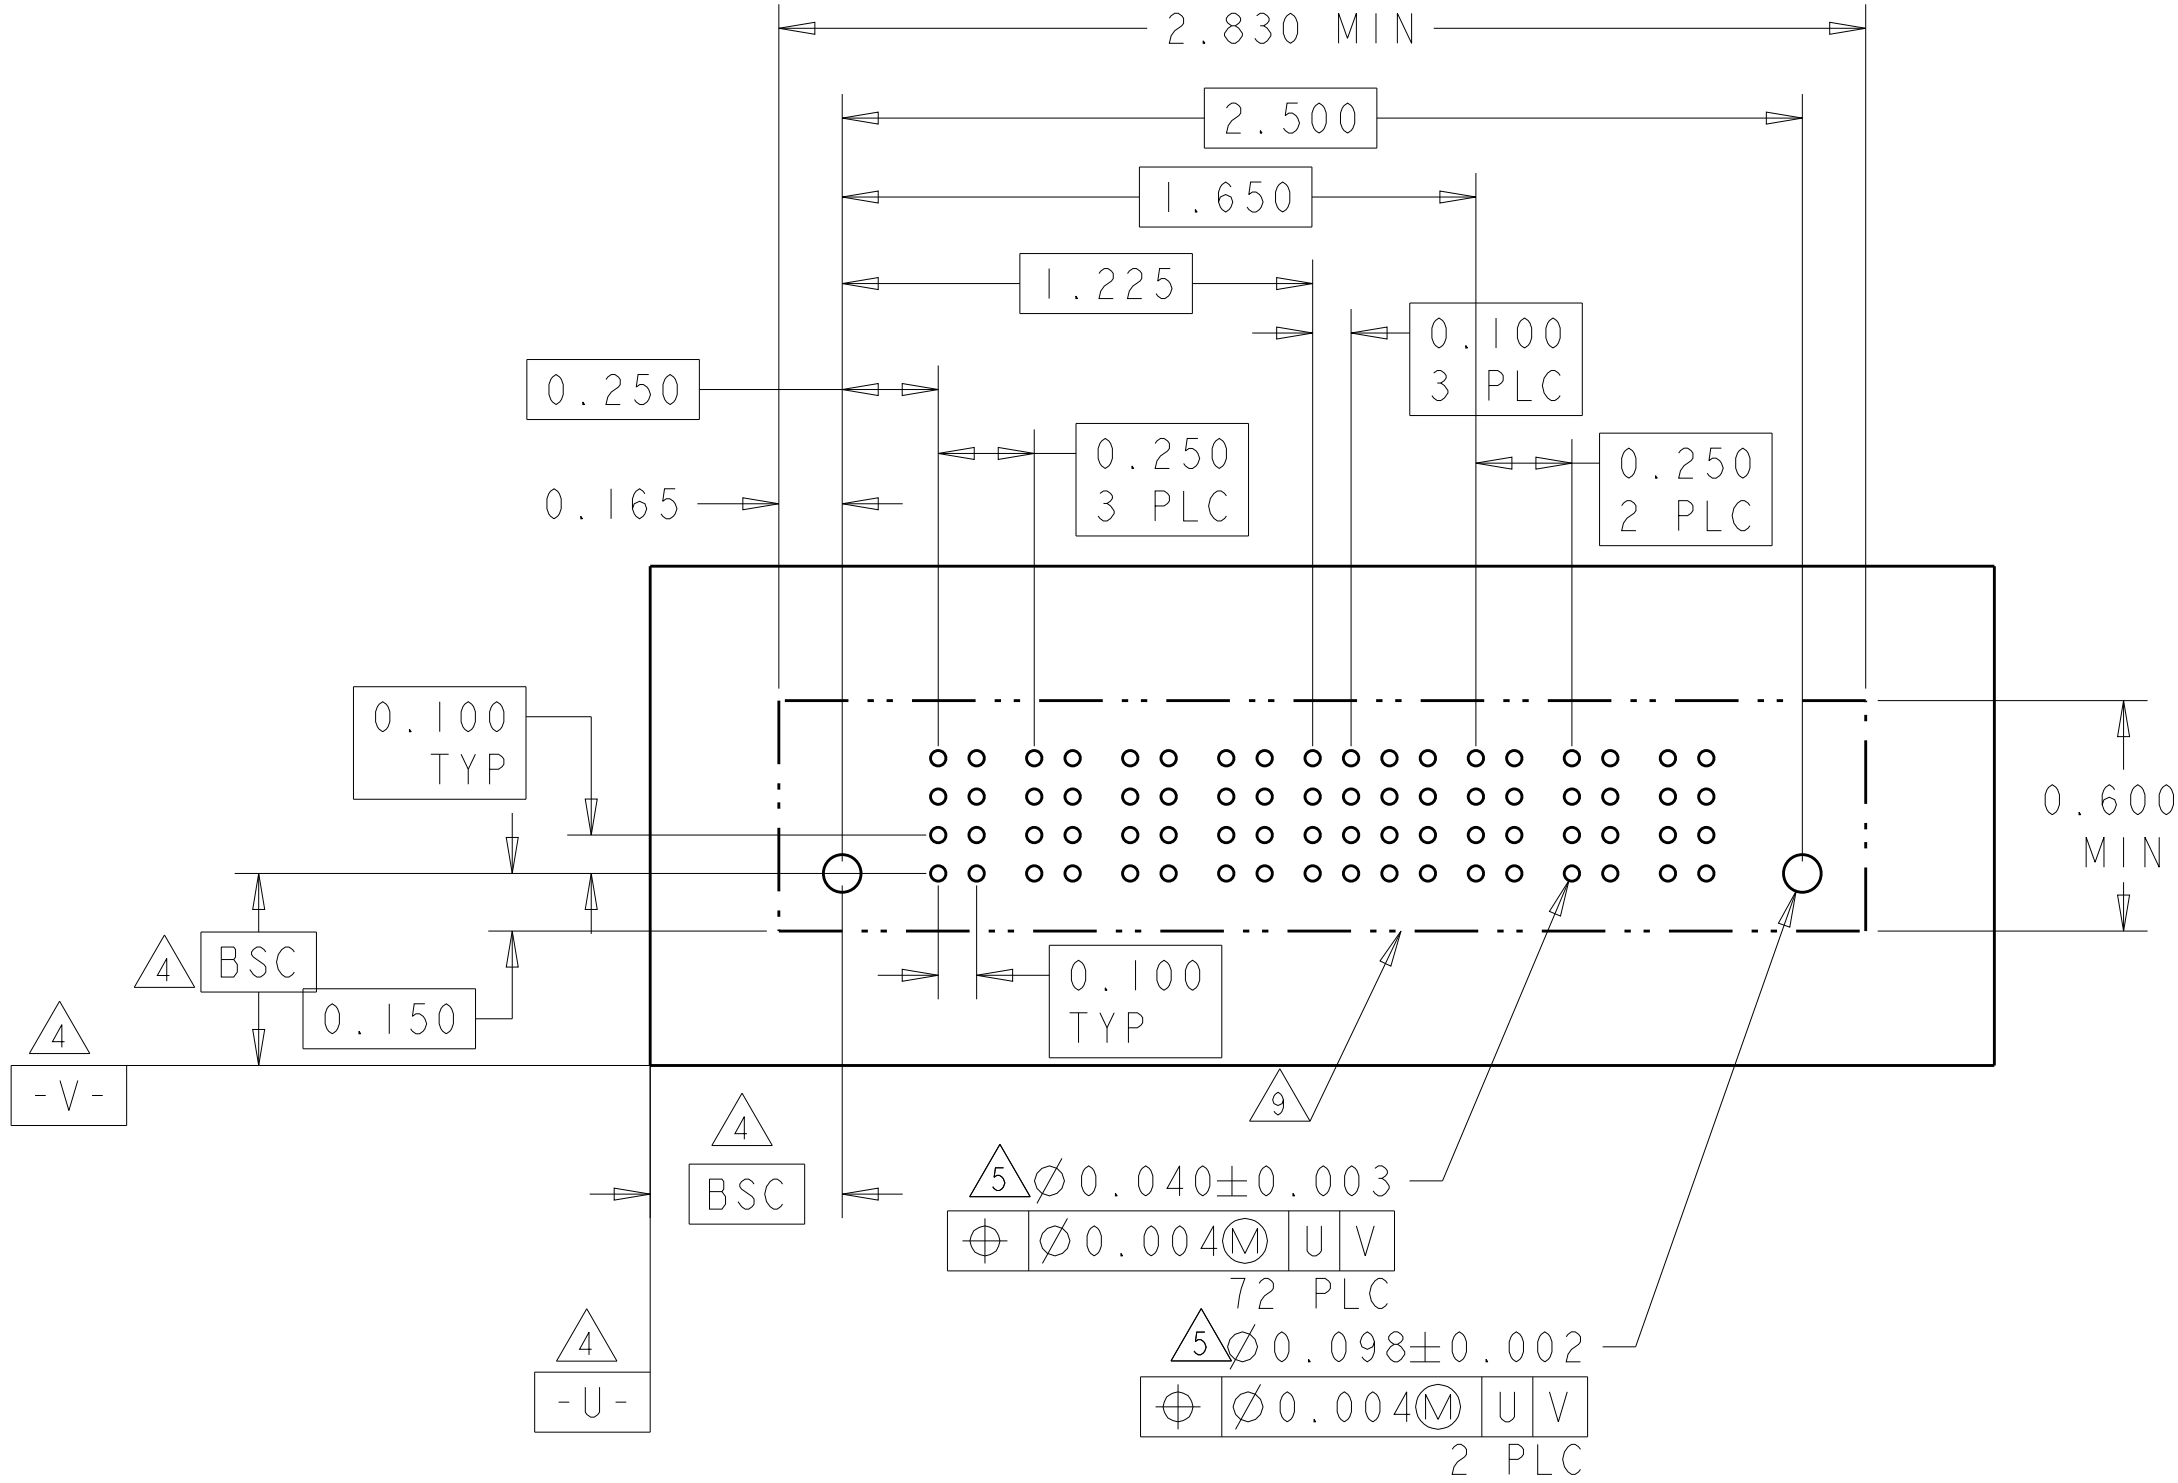

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
2-6600333-6	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

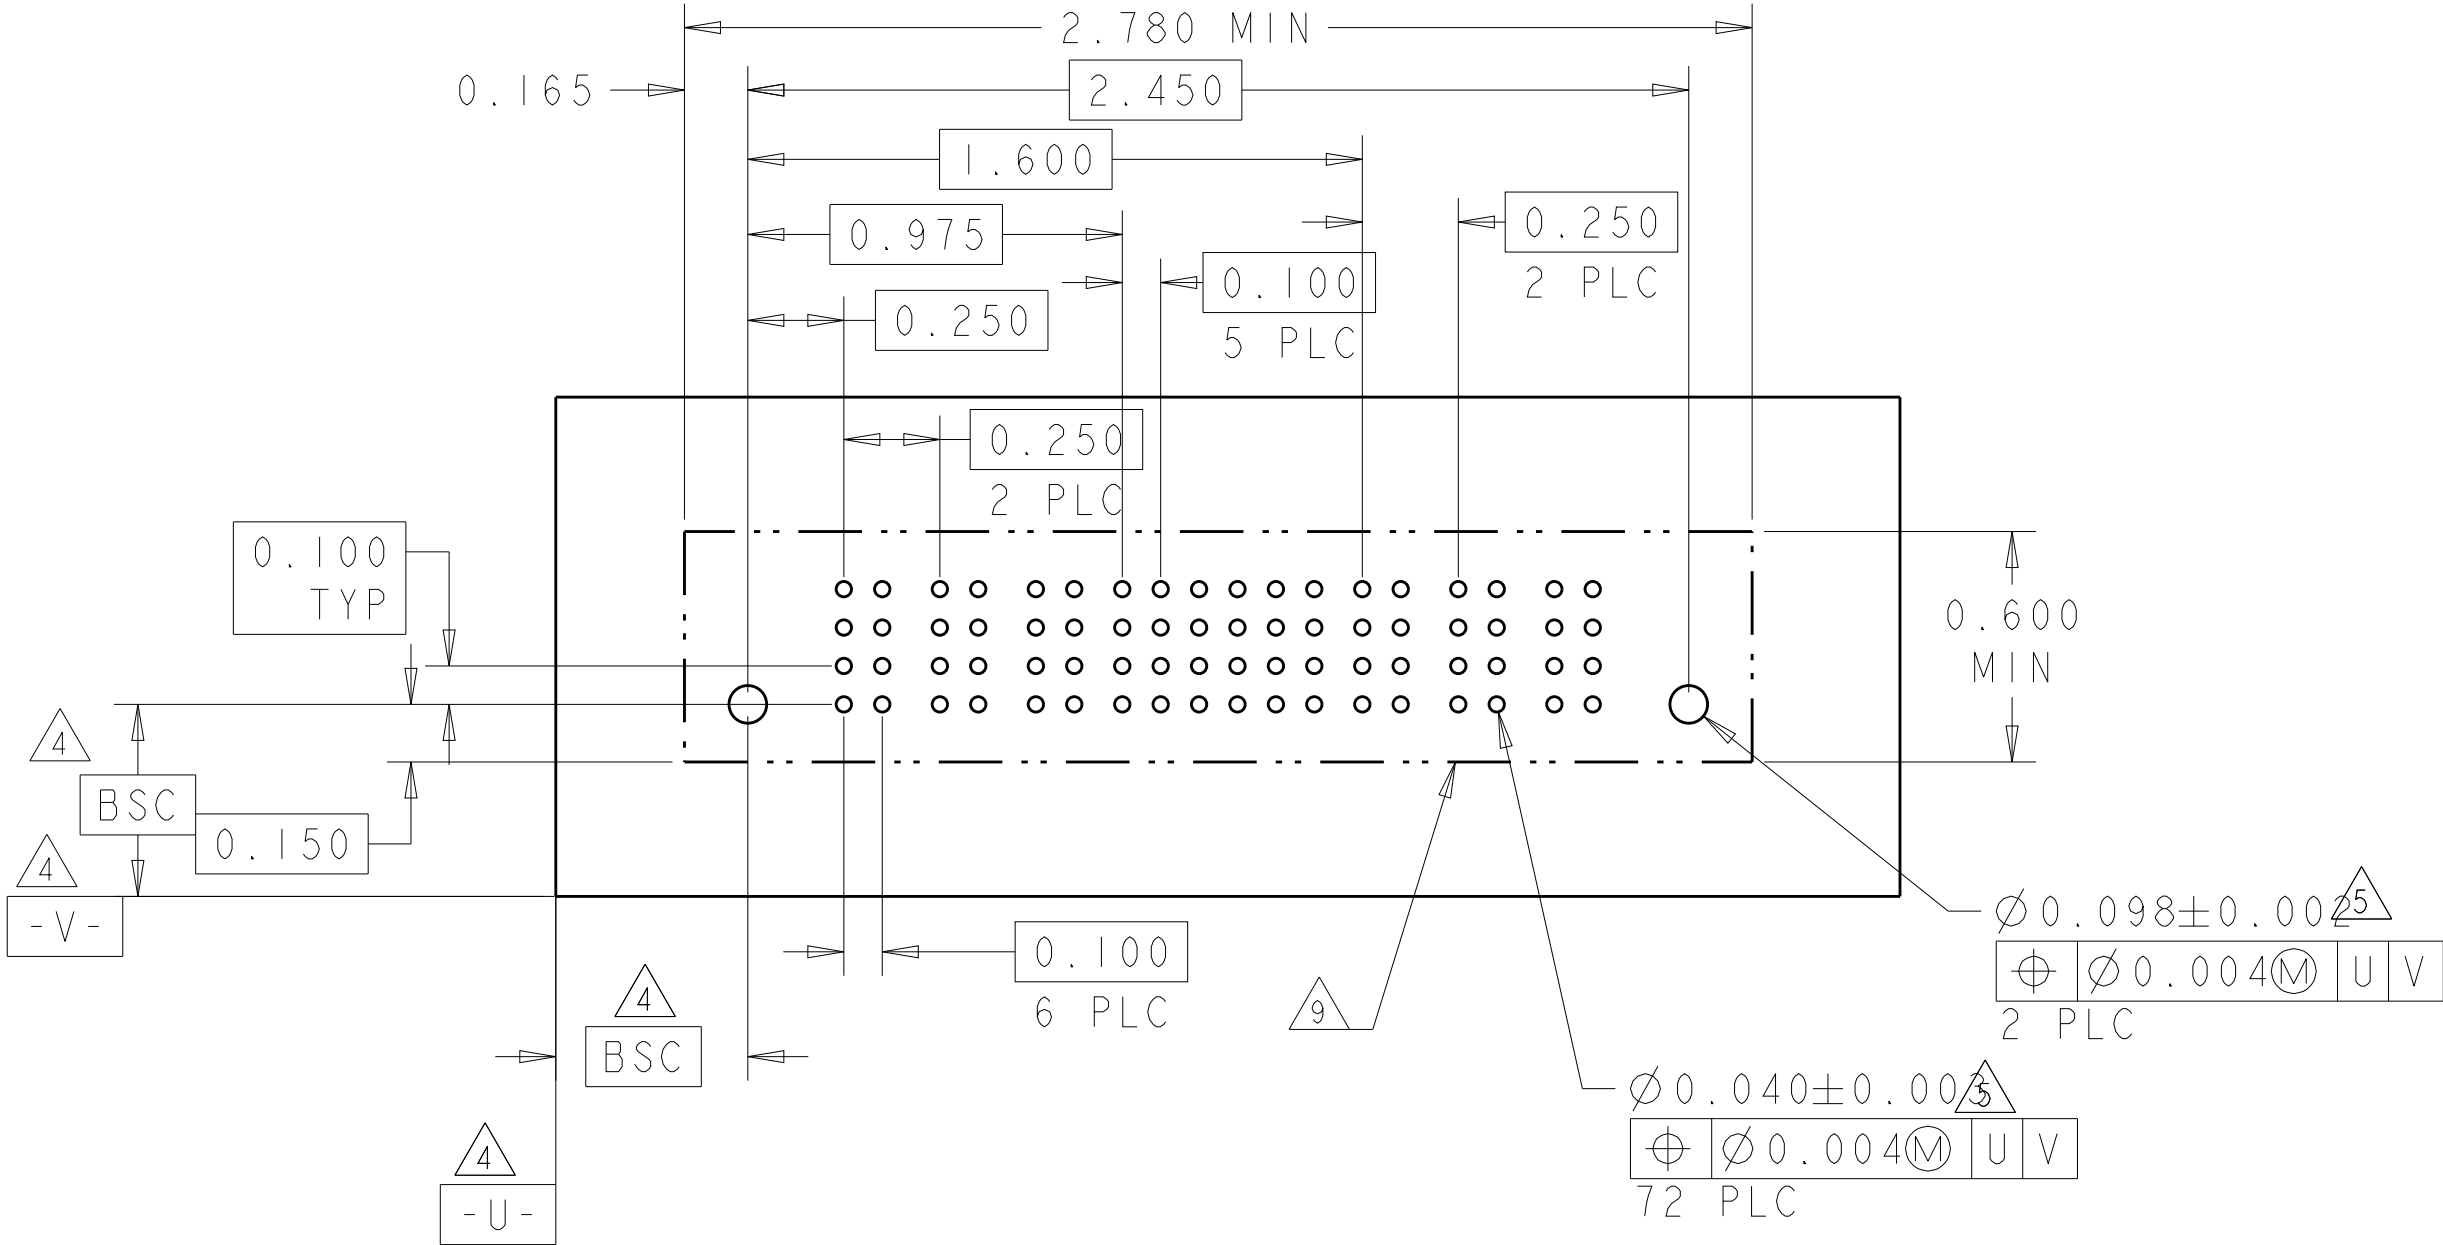

PART NUMBER	ROWS		POWER				SIGNAL						POWER					
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	
2-6600333-7	D		VM	VM	VM	VM	ES	EV	ES	EV	EV		VM	VM	VM	VM	VM	
	C						EV	EV	EV	ES	EV							
	B						EV	ES	EV	EV	EV							
	A						ES	ES	EV	EV	ES							
4P+24S+5P		HD																HD

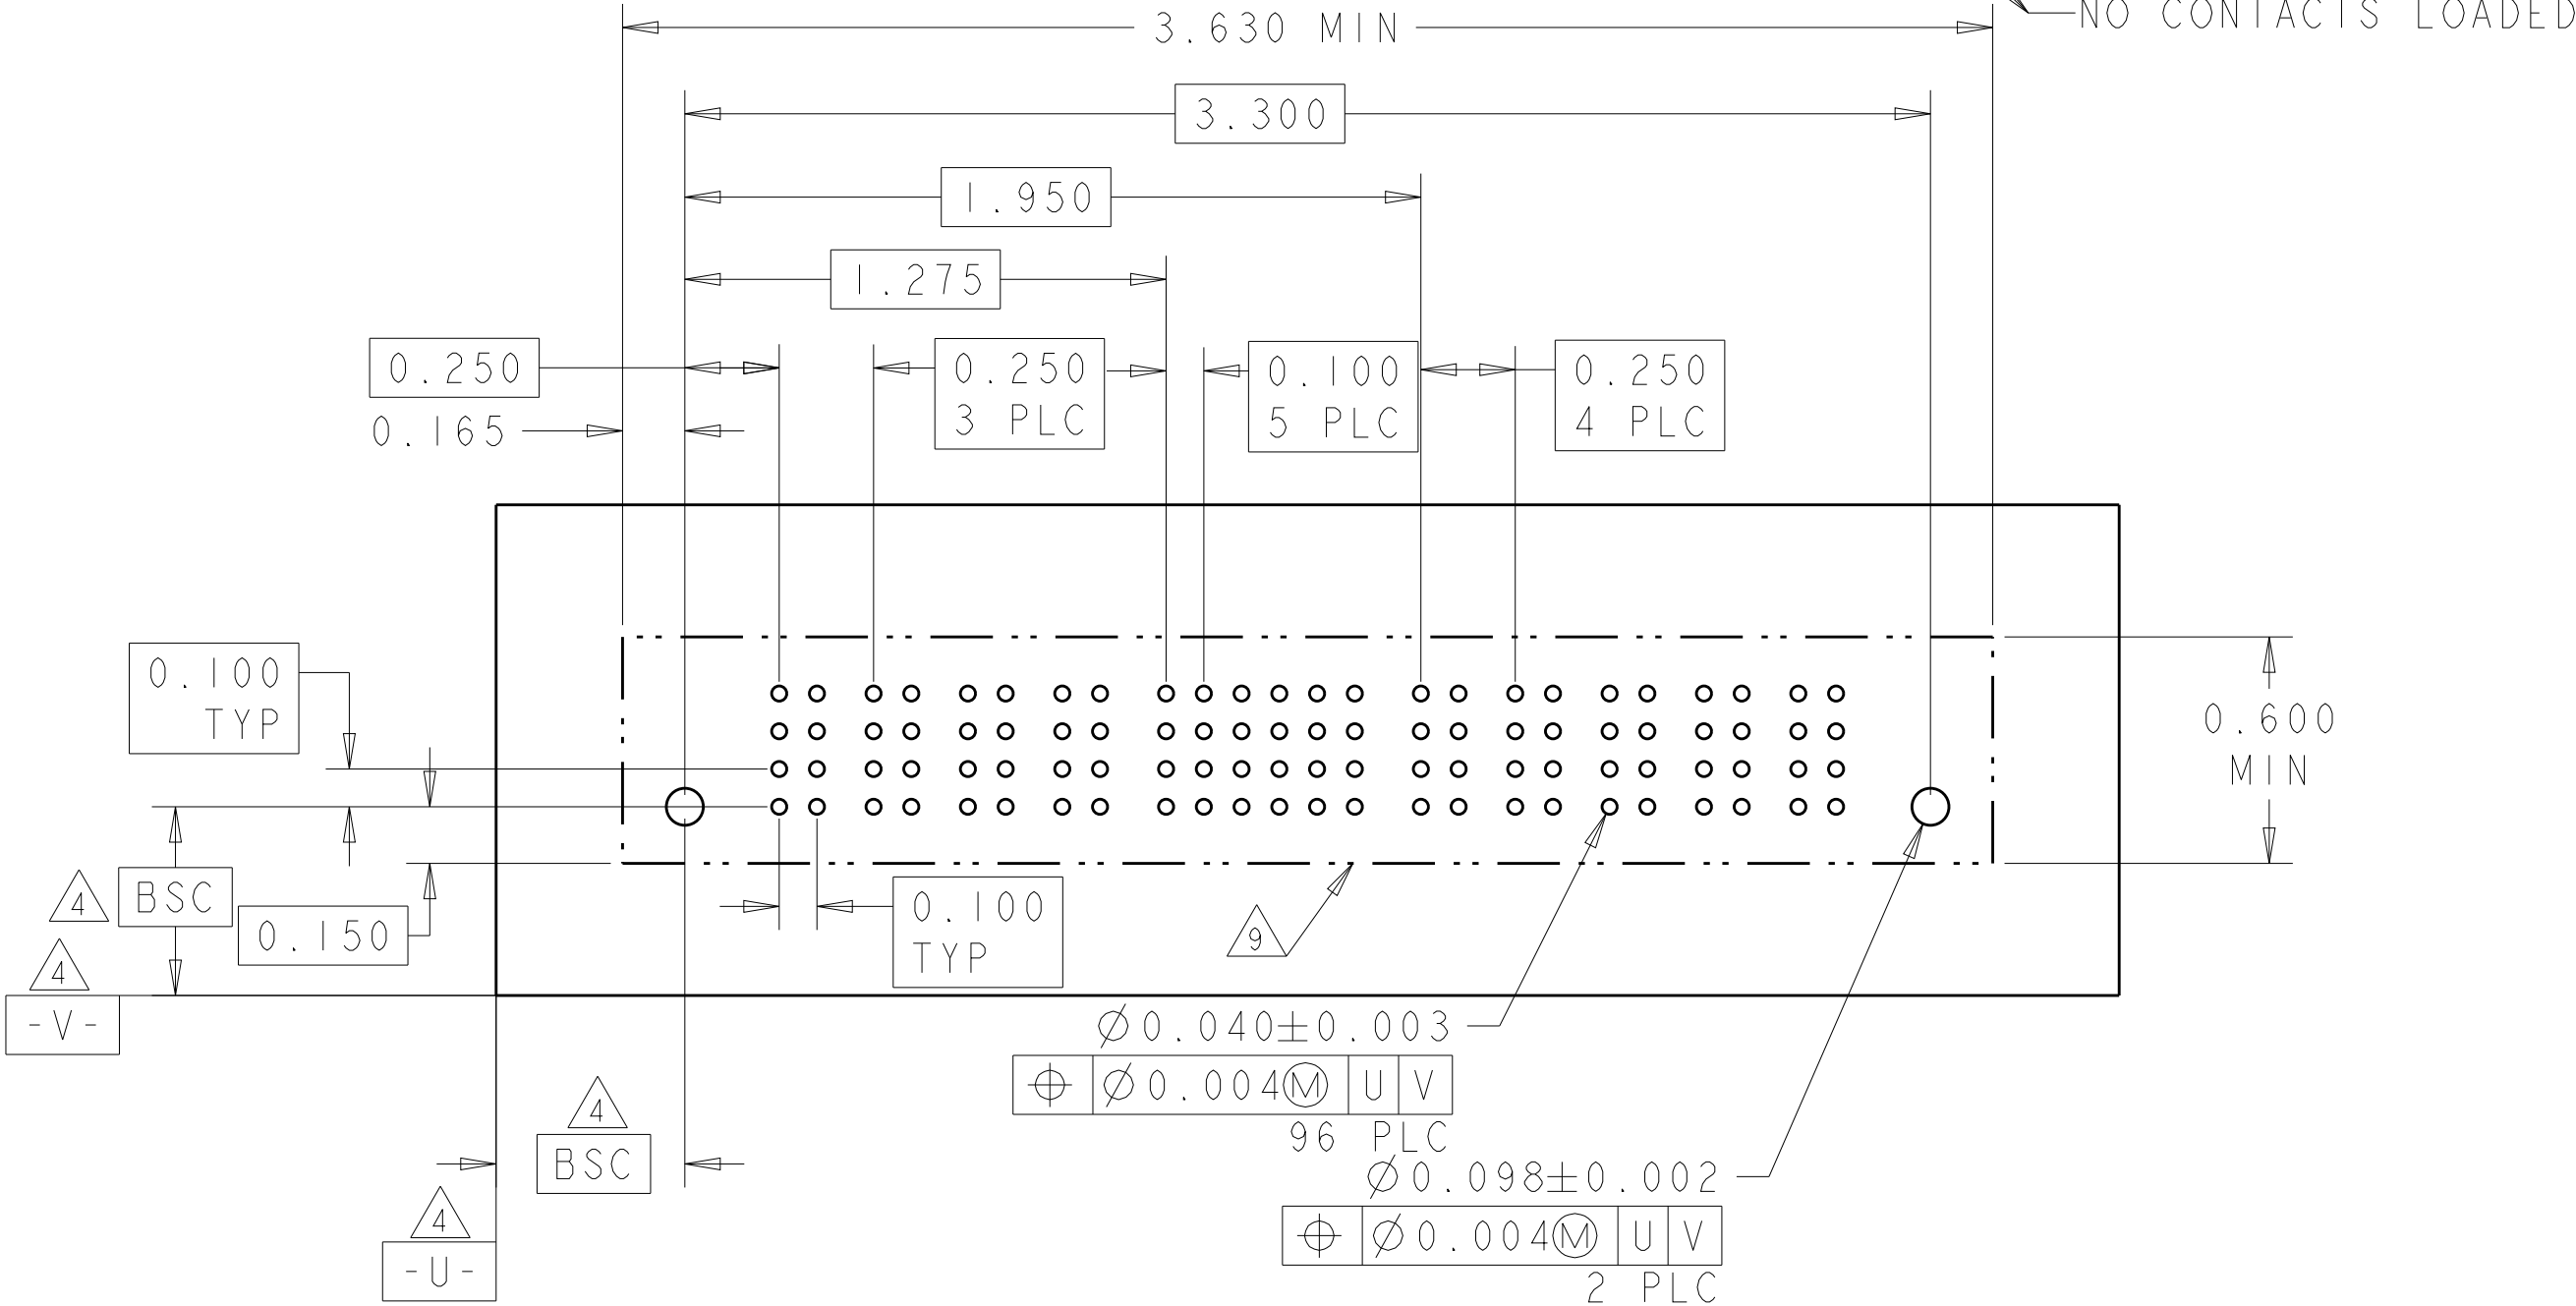

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

Customer Drawing

SCALE 3:1

SHEET 9 of 22

REV P7

NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE A1


CAGE CODE 100779


DRAWING NO. C=6600333

RESTRICTED TO -


TE Connectivity


Customer Drawing

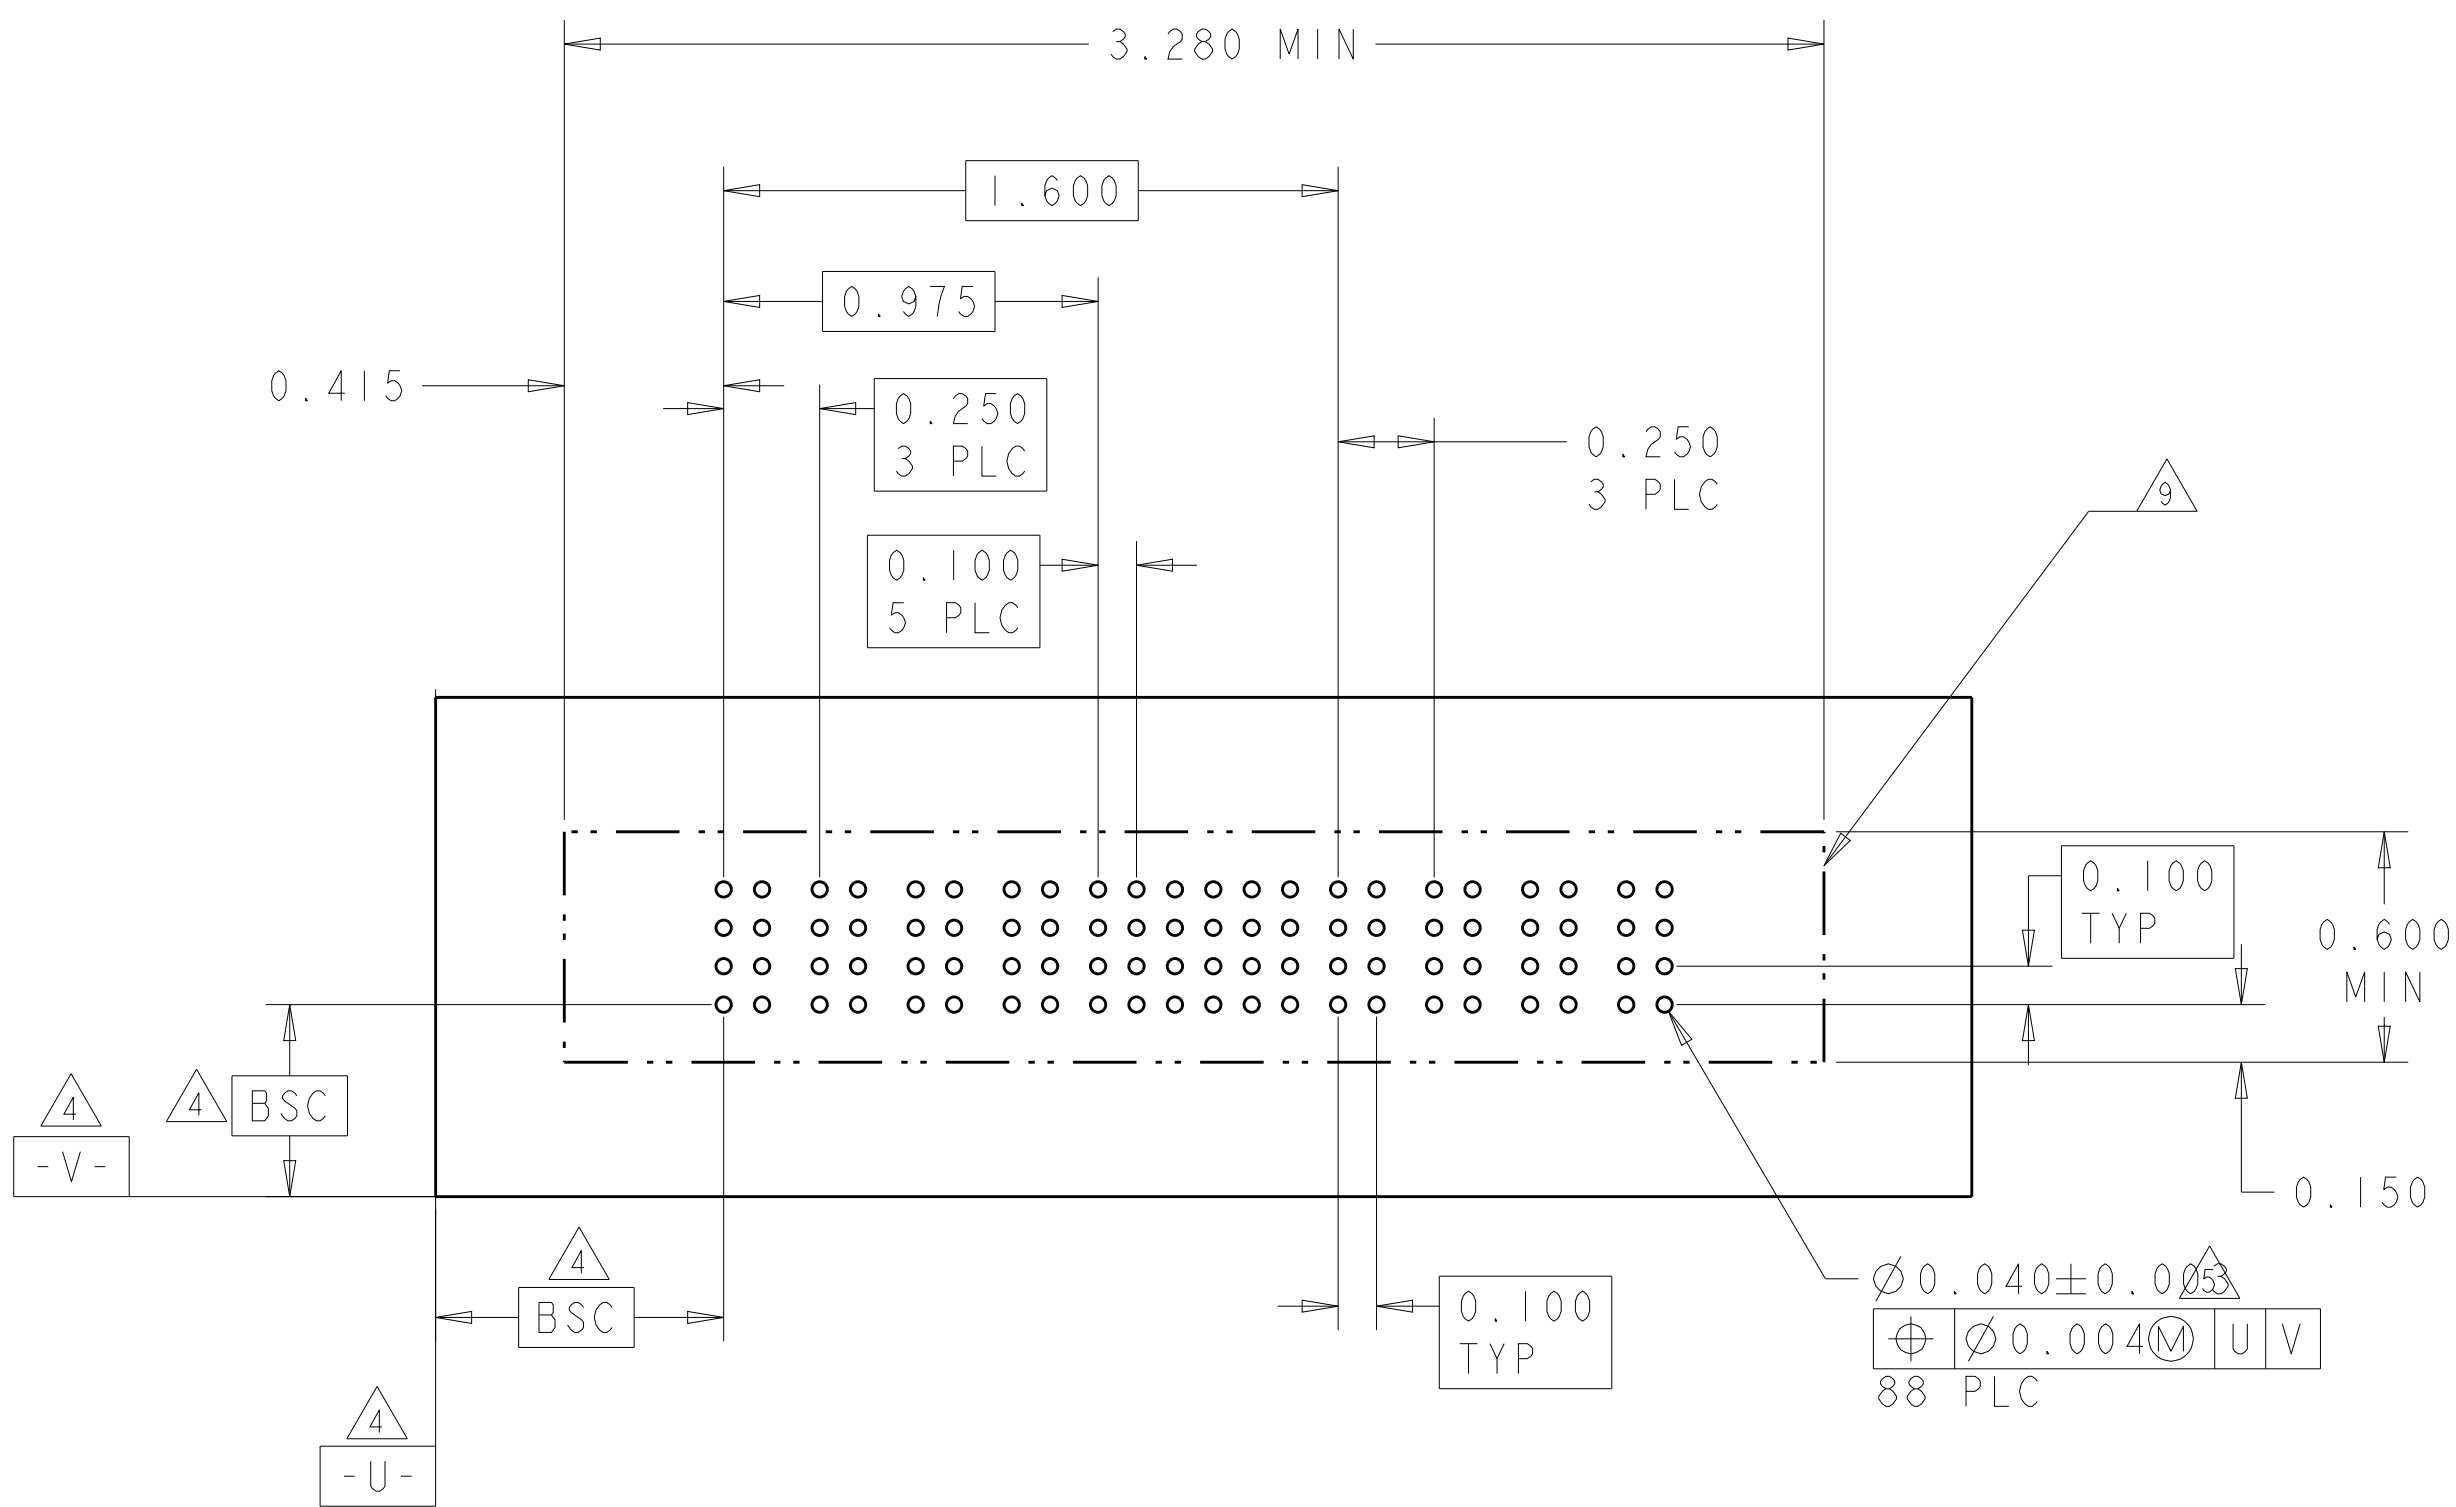[illegible]4805 (3/11)

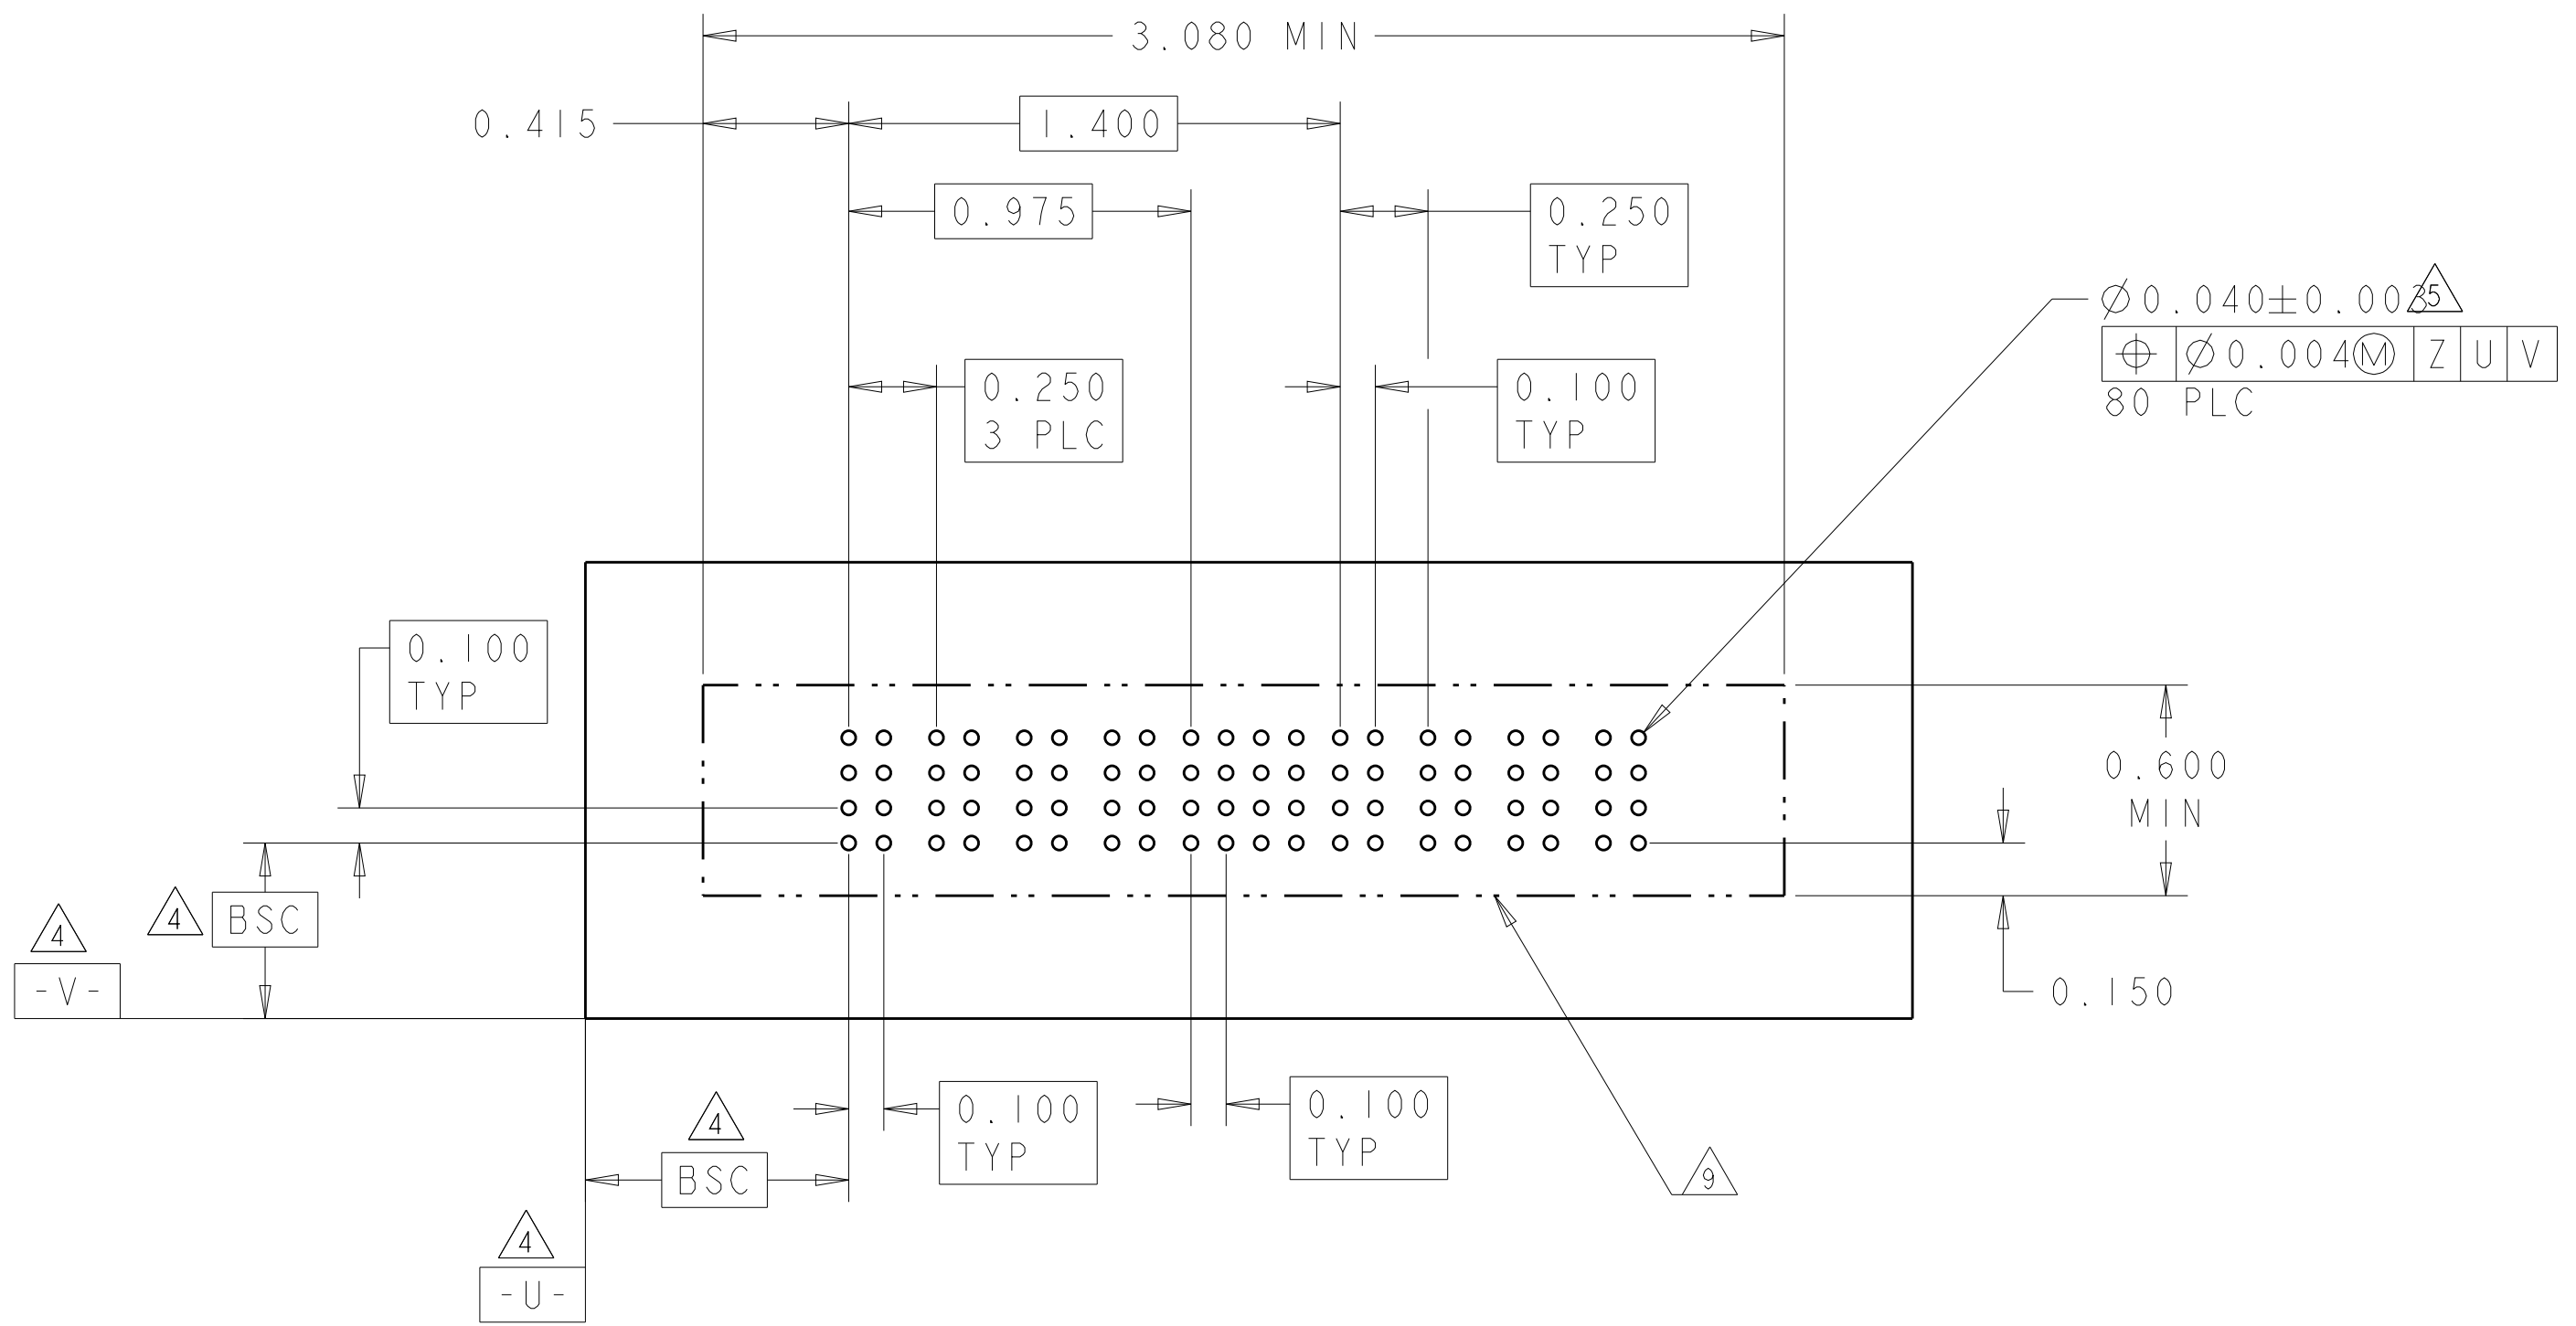[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
3-6600333-7	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM	
	C				ES	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV			
2P+24S+2P		HD											HD


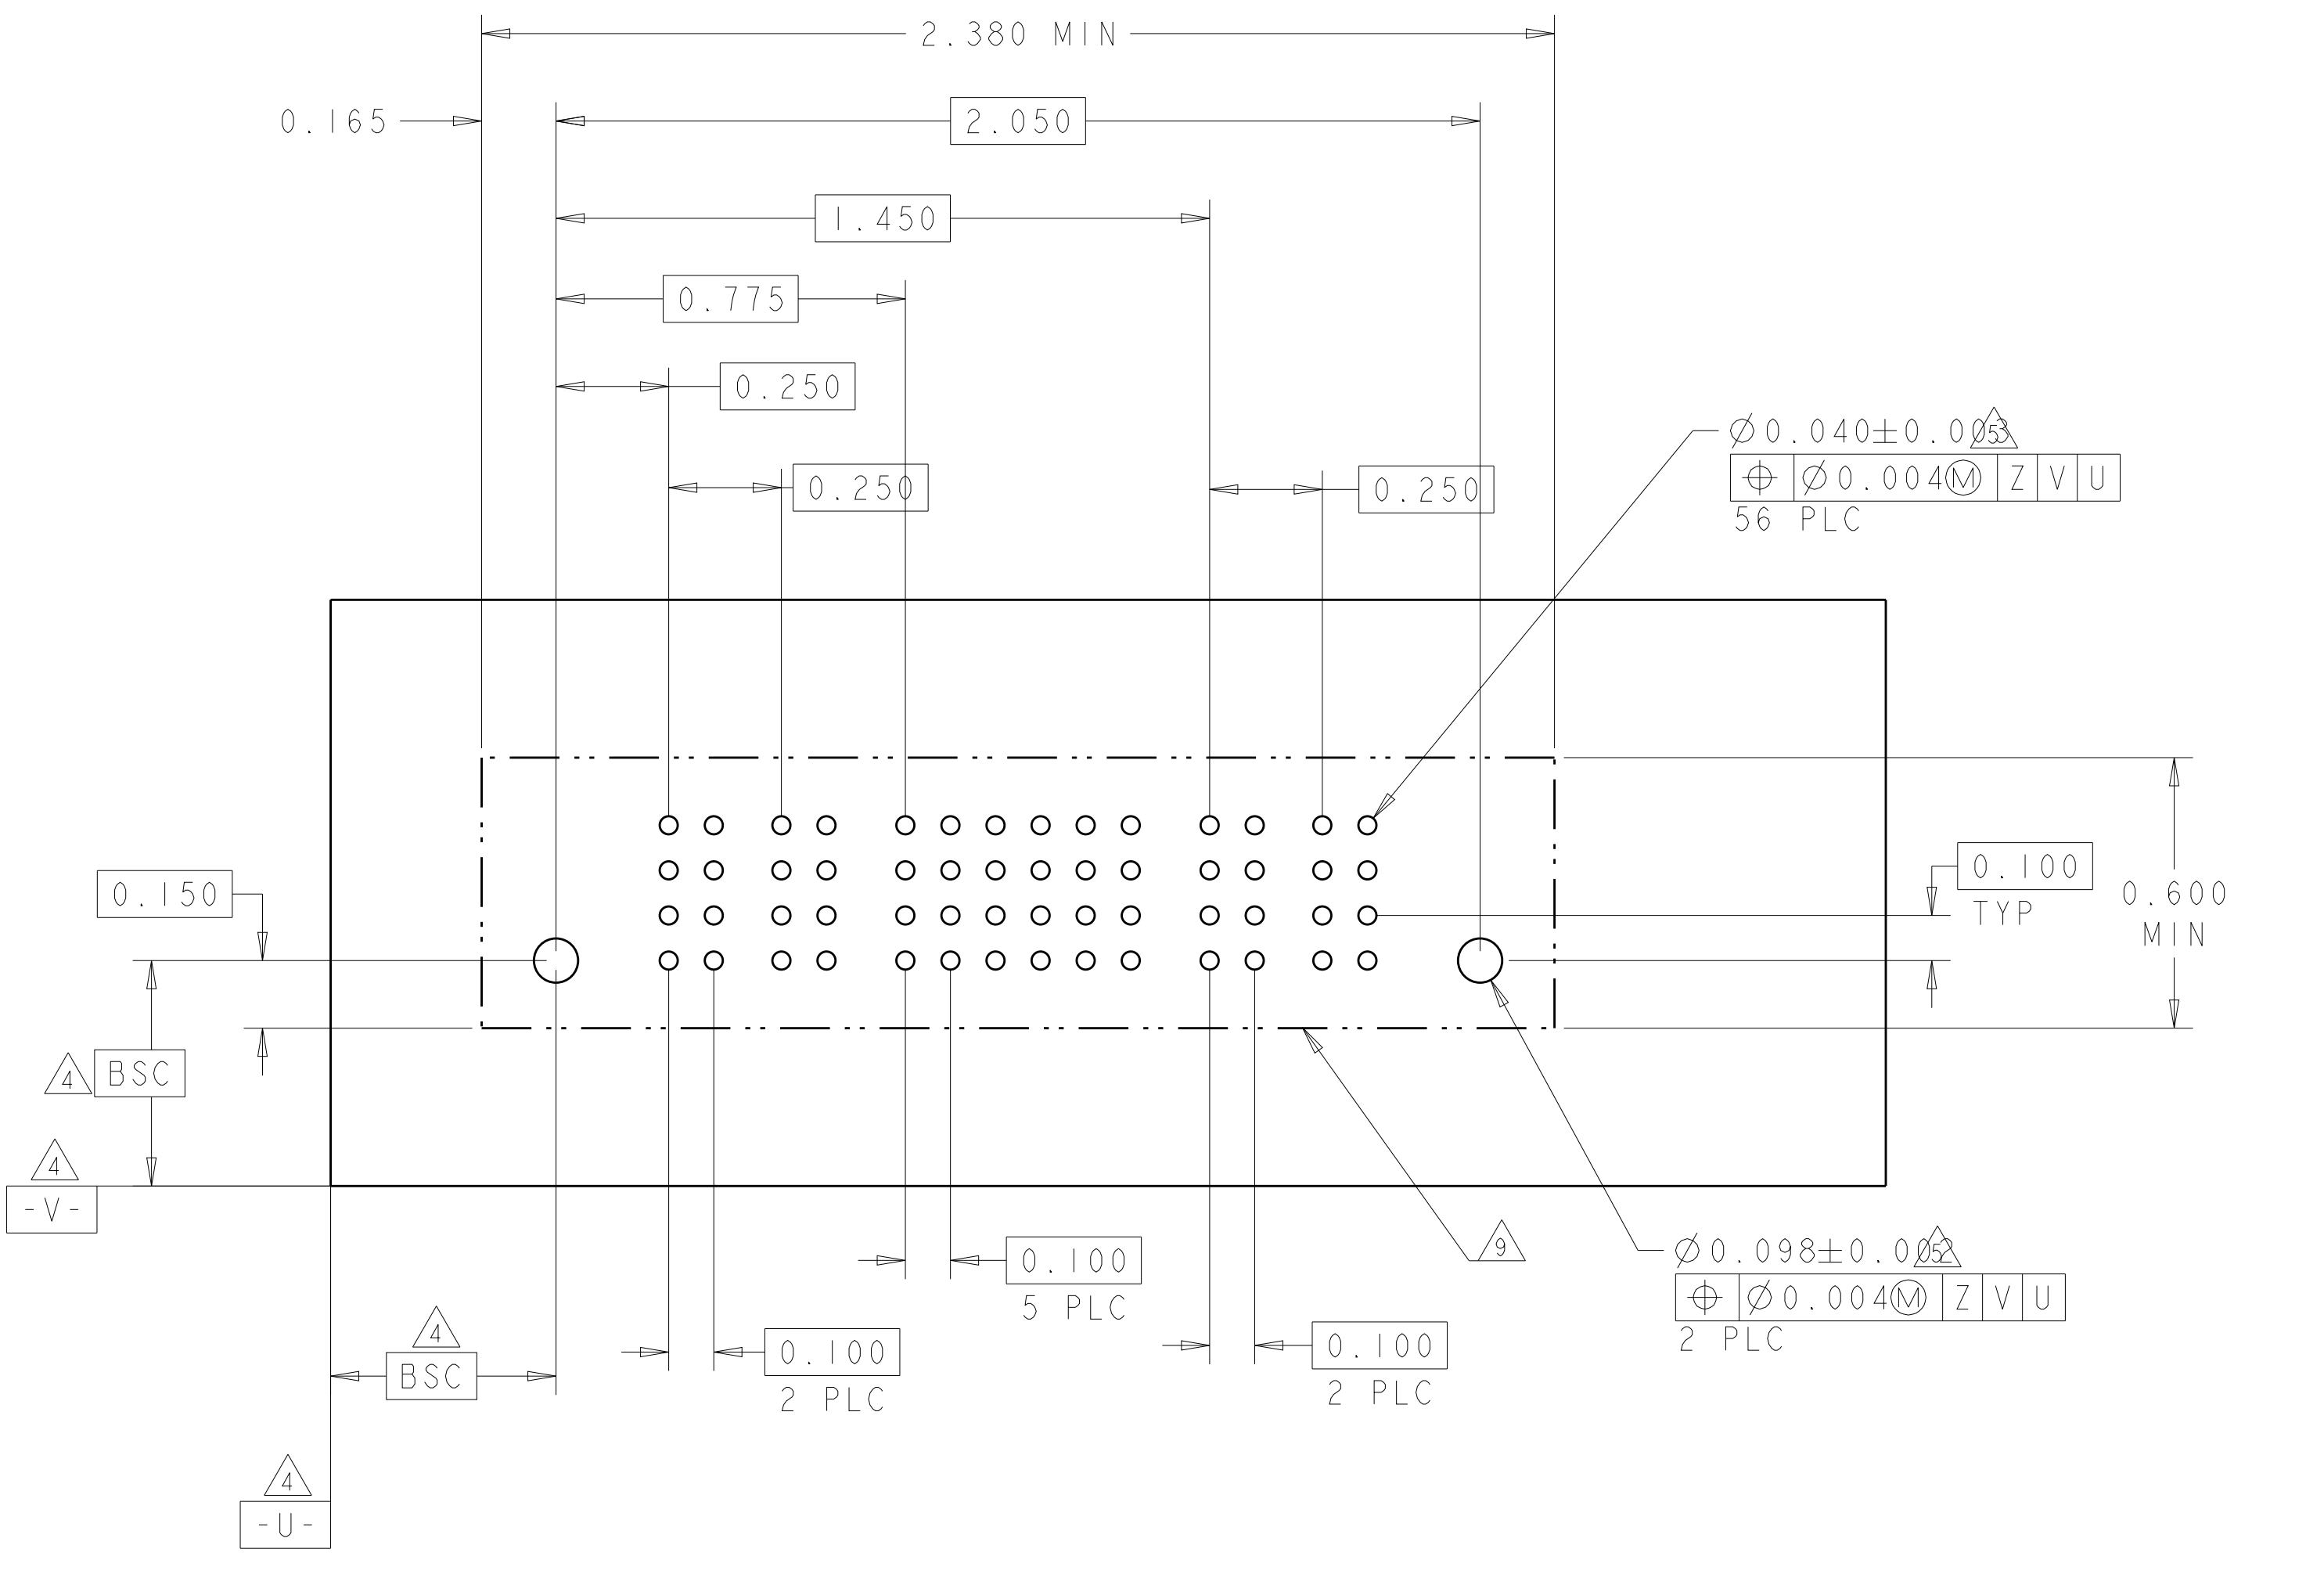


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 23MAR2005 J. McCLENTON		 TE Connectivity	
DIMENSIONS:		CHK 23MAR2005 D. TROUT			
1 INCH		TOLERANCES, UNLESS SPECIFIED:		NAME	
		APPROV D. R. WHYNE 23MAR2005		VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC		SIZE CASE CODE DRAWING NO	
		108-1973		A1 00779 C-6600333	
		APPLICATION SPEC		RESTRICTED TO	
MATERIAL		FINISH		SCALE 3:1 SHEET 14 OF 22 REV P	
-		-		Customer Drawing	


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	I	2	P7	P8	P9	P10	P11	P12	
3-6600333-8	D		VM	VM	VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	VM	VM	
	C								EV	EV							
	B								EV	EV							
	A								EV	EV							
6P+8S+6P		HD															HD

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-9	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3ACP+24S+3ACP		HD													HD

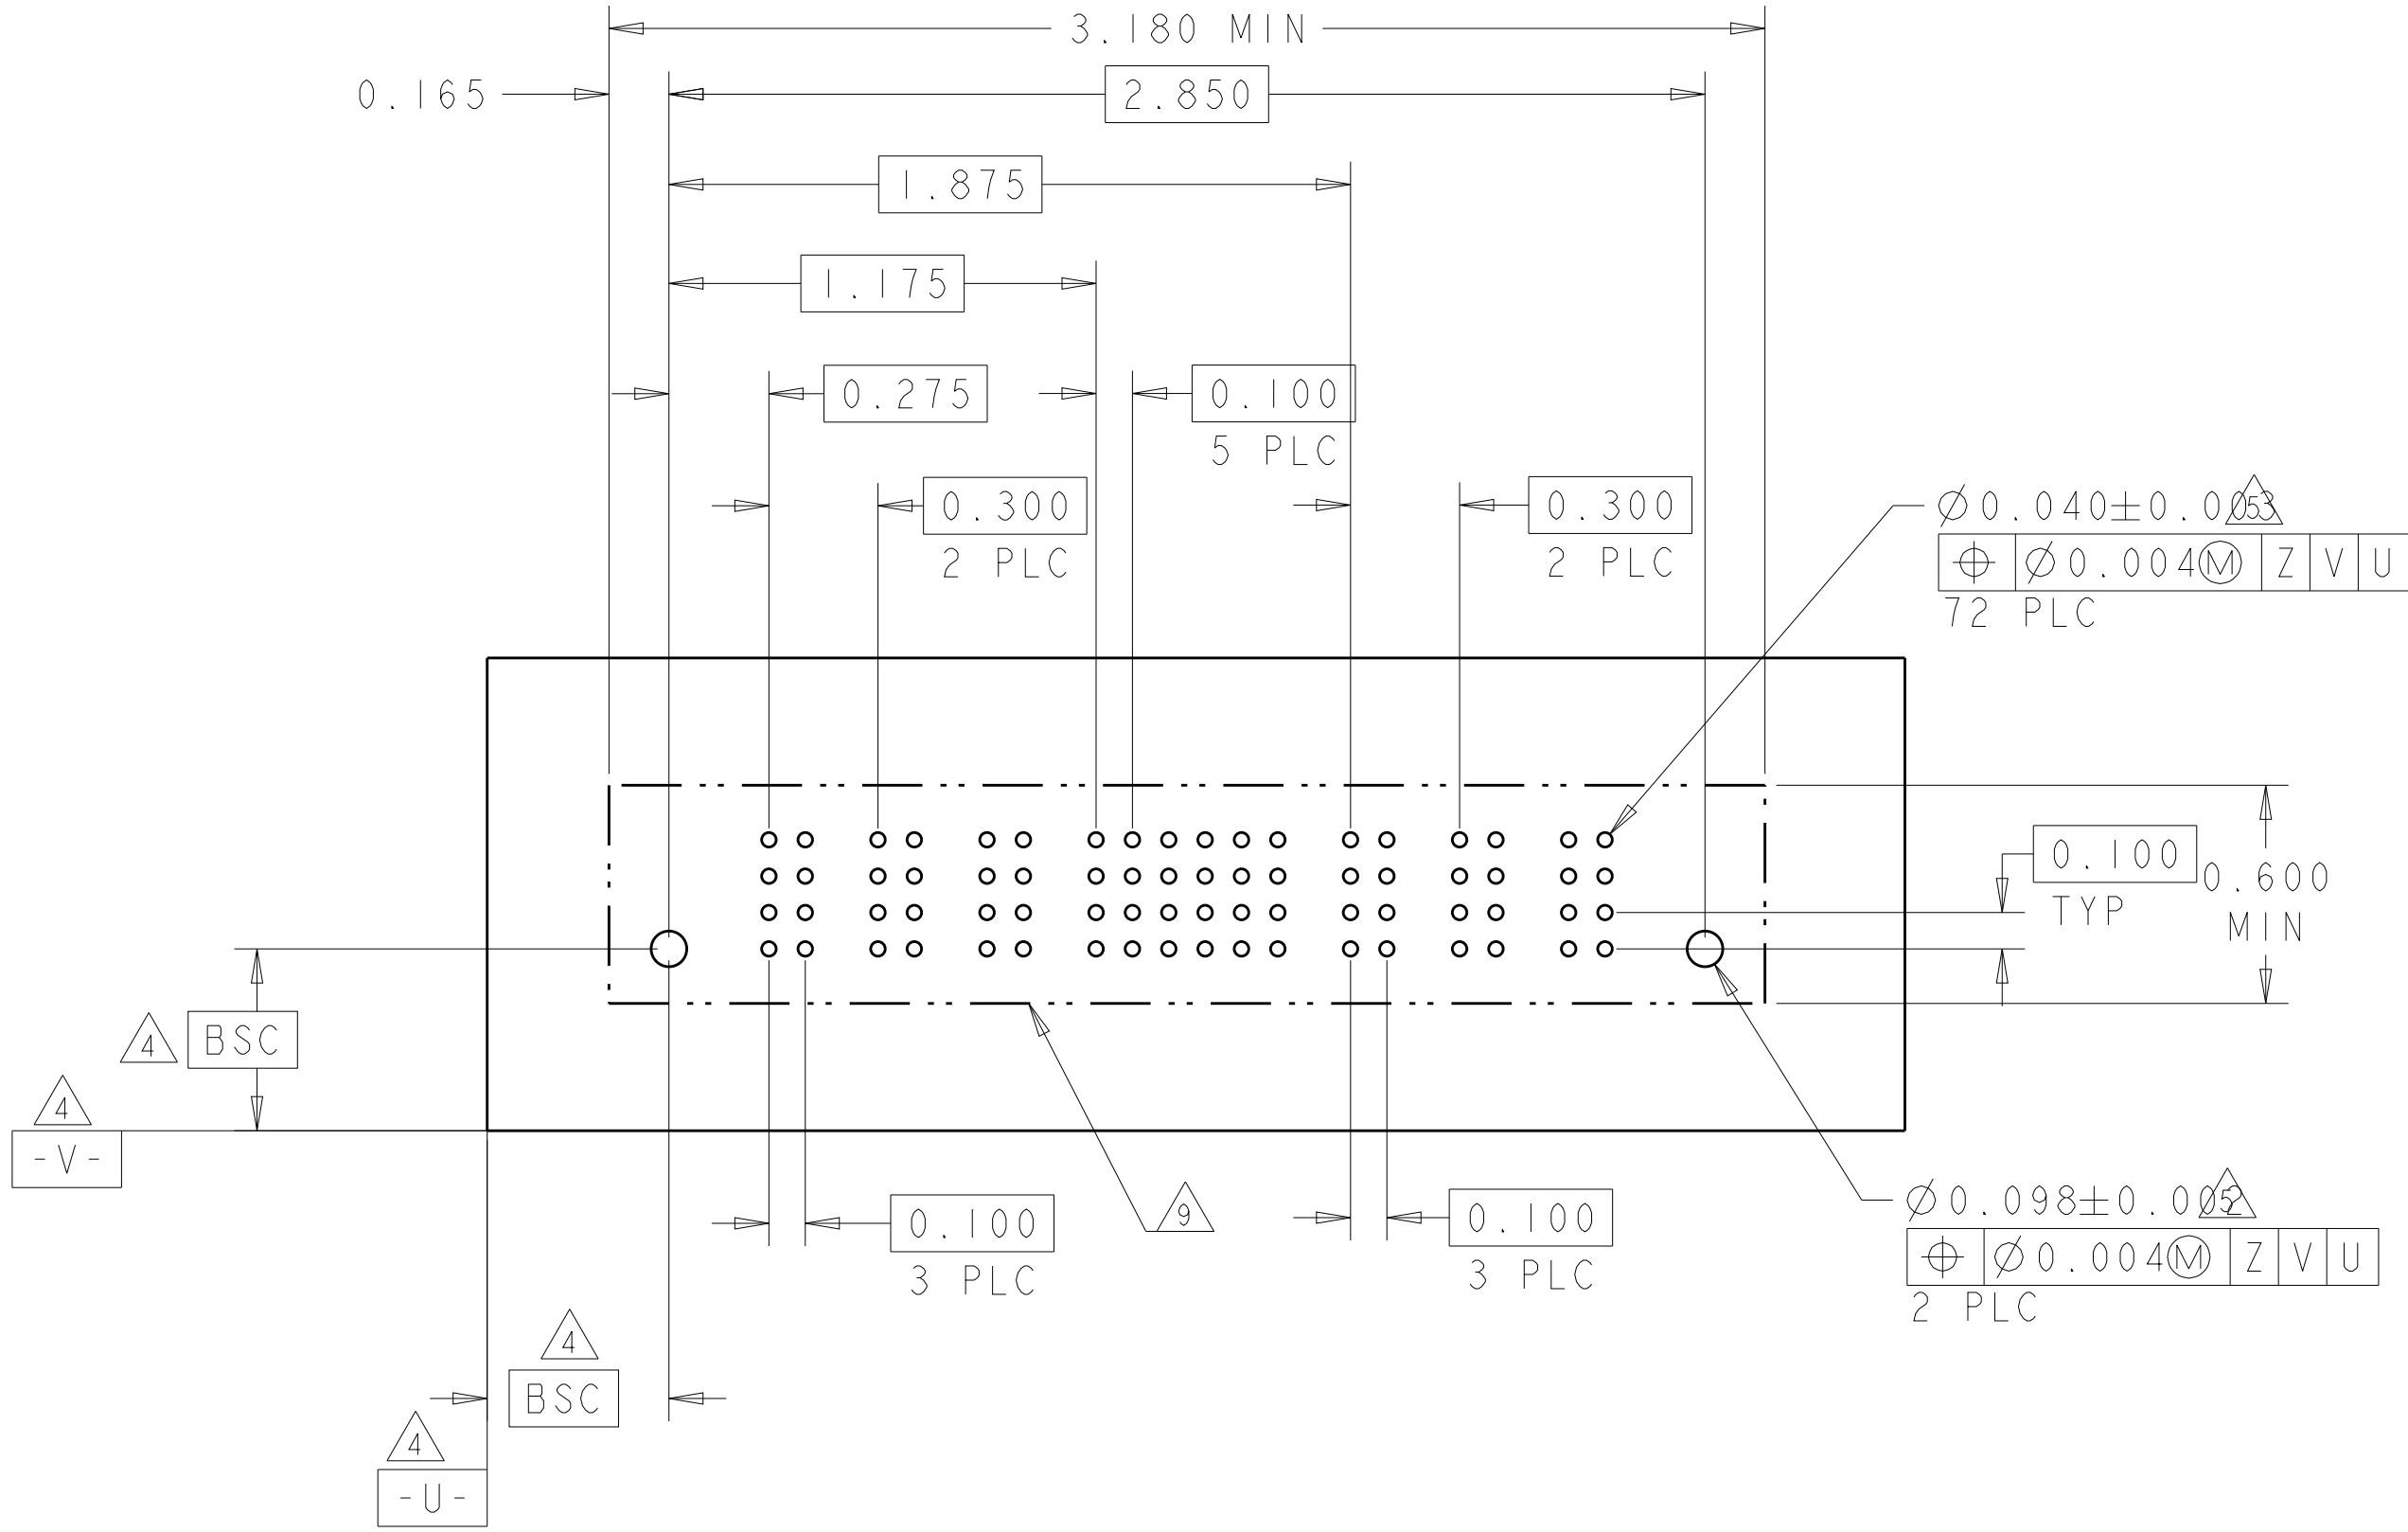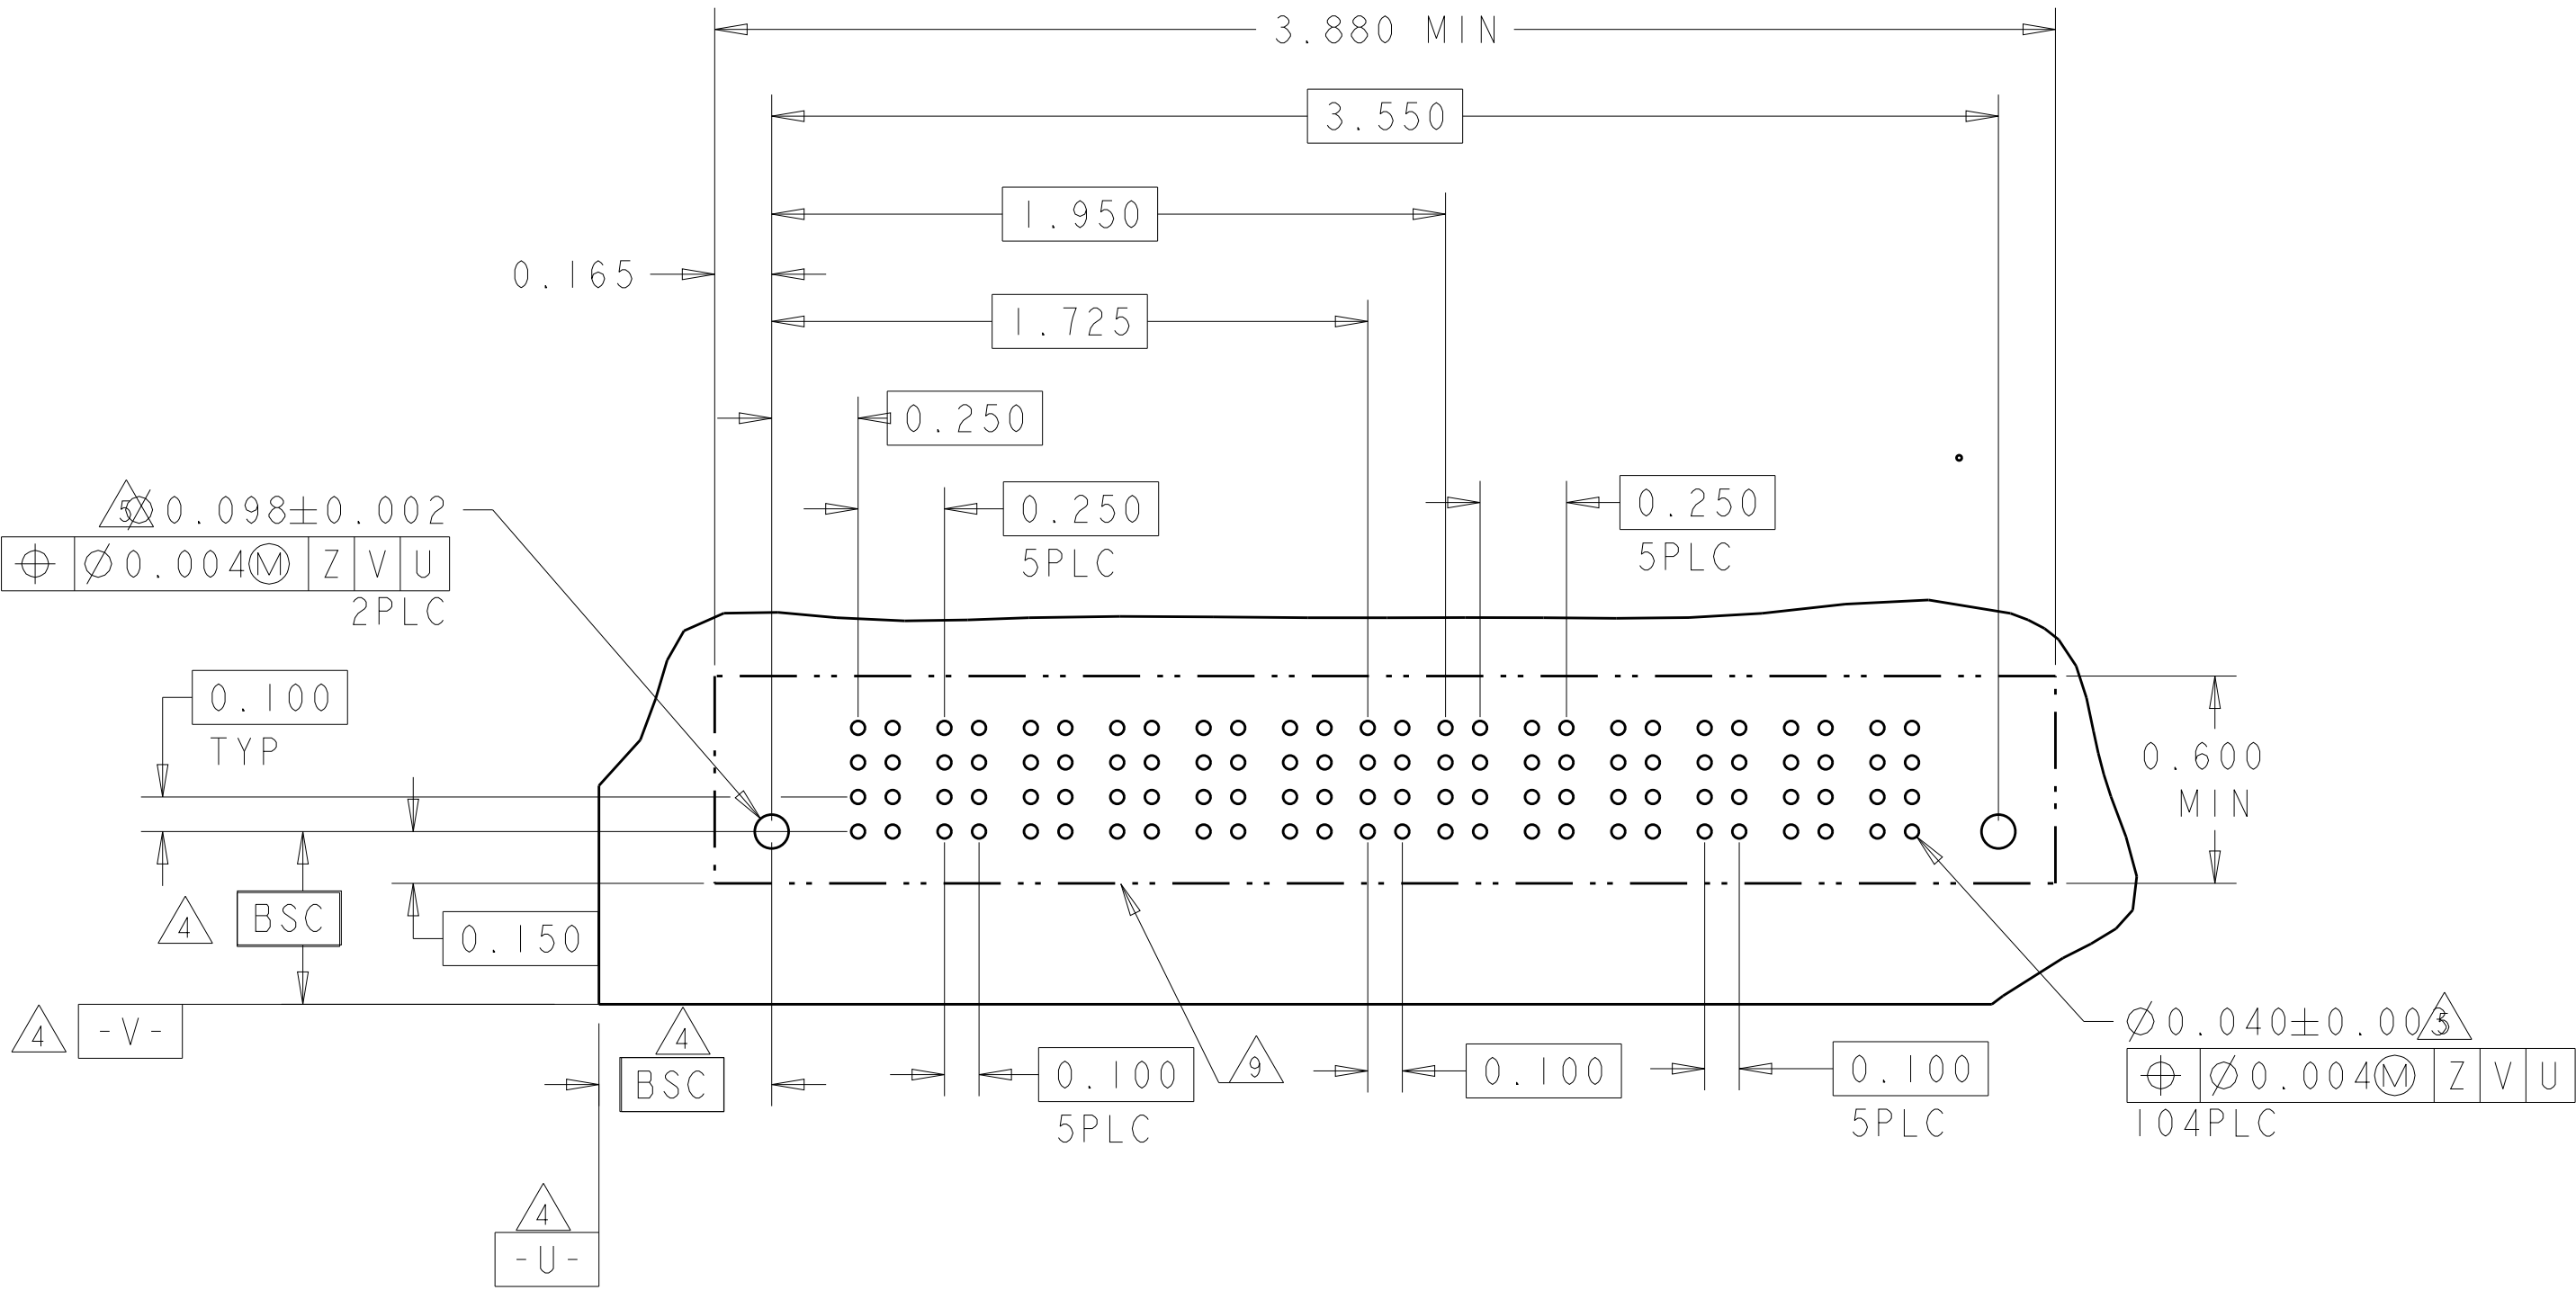

PART NUMBER	ROWS		POWER		SIGNAL			POWER	
			P1	1	2	3	P2		
4-6600333-9	D		VM	ES	EV	EV	VM		
	C			EV	EV	EV			
	B			EV	EV	EV			
	A			EV	EV	EV			
1P+12S+1P		HD							HD

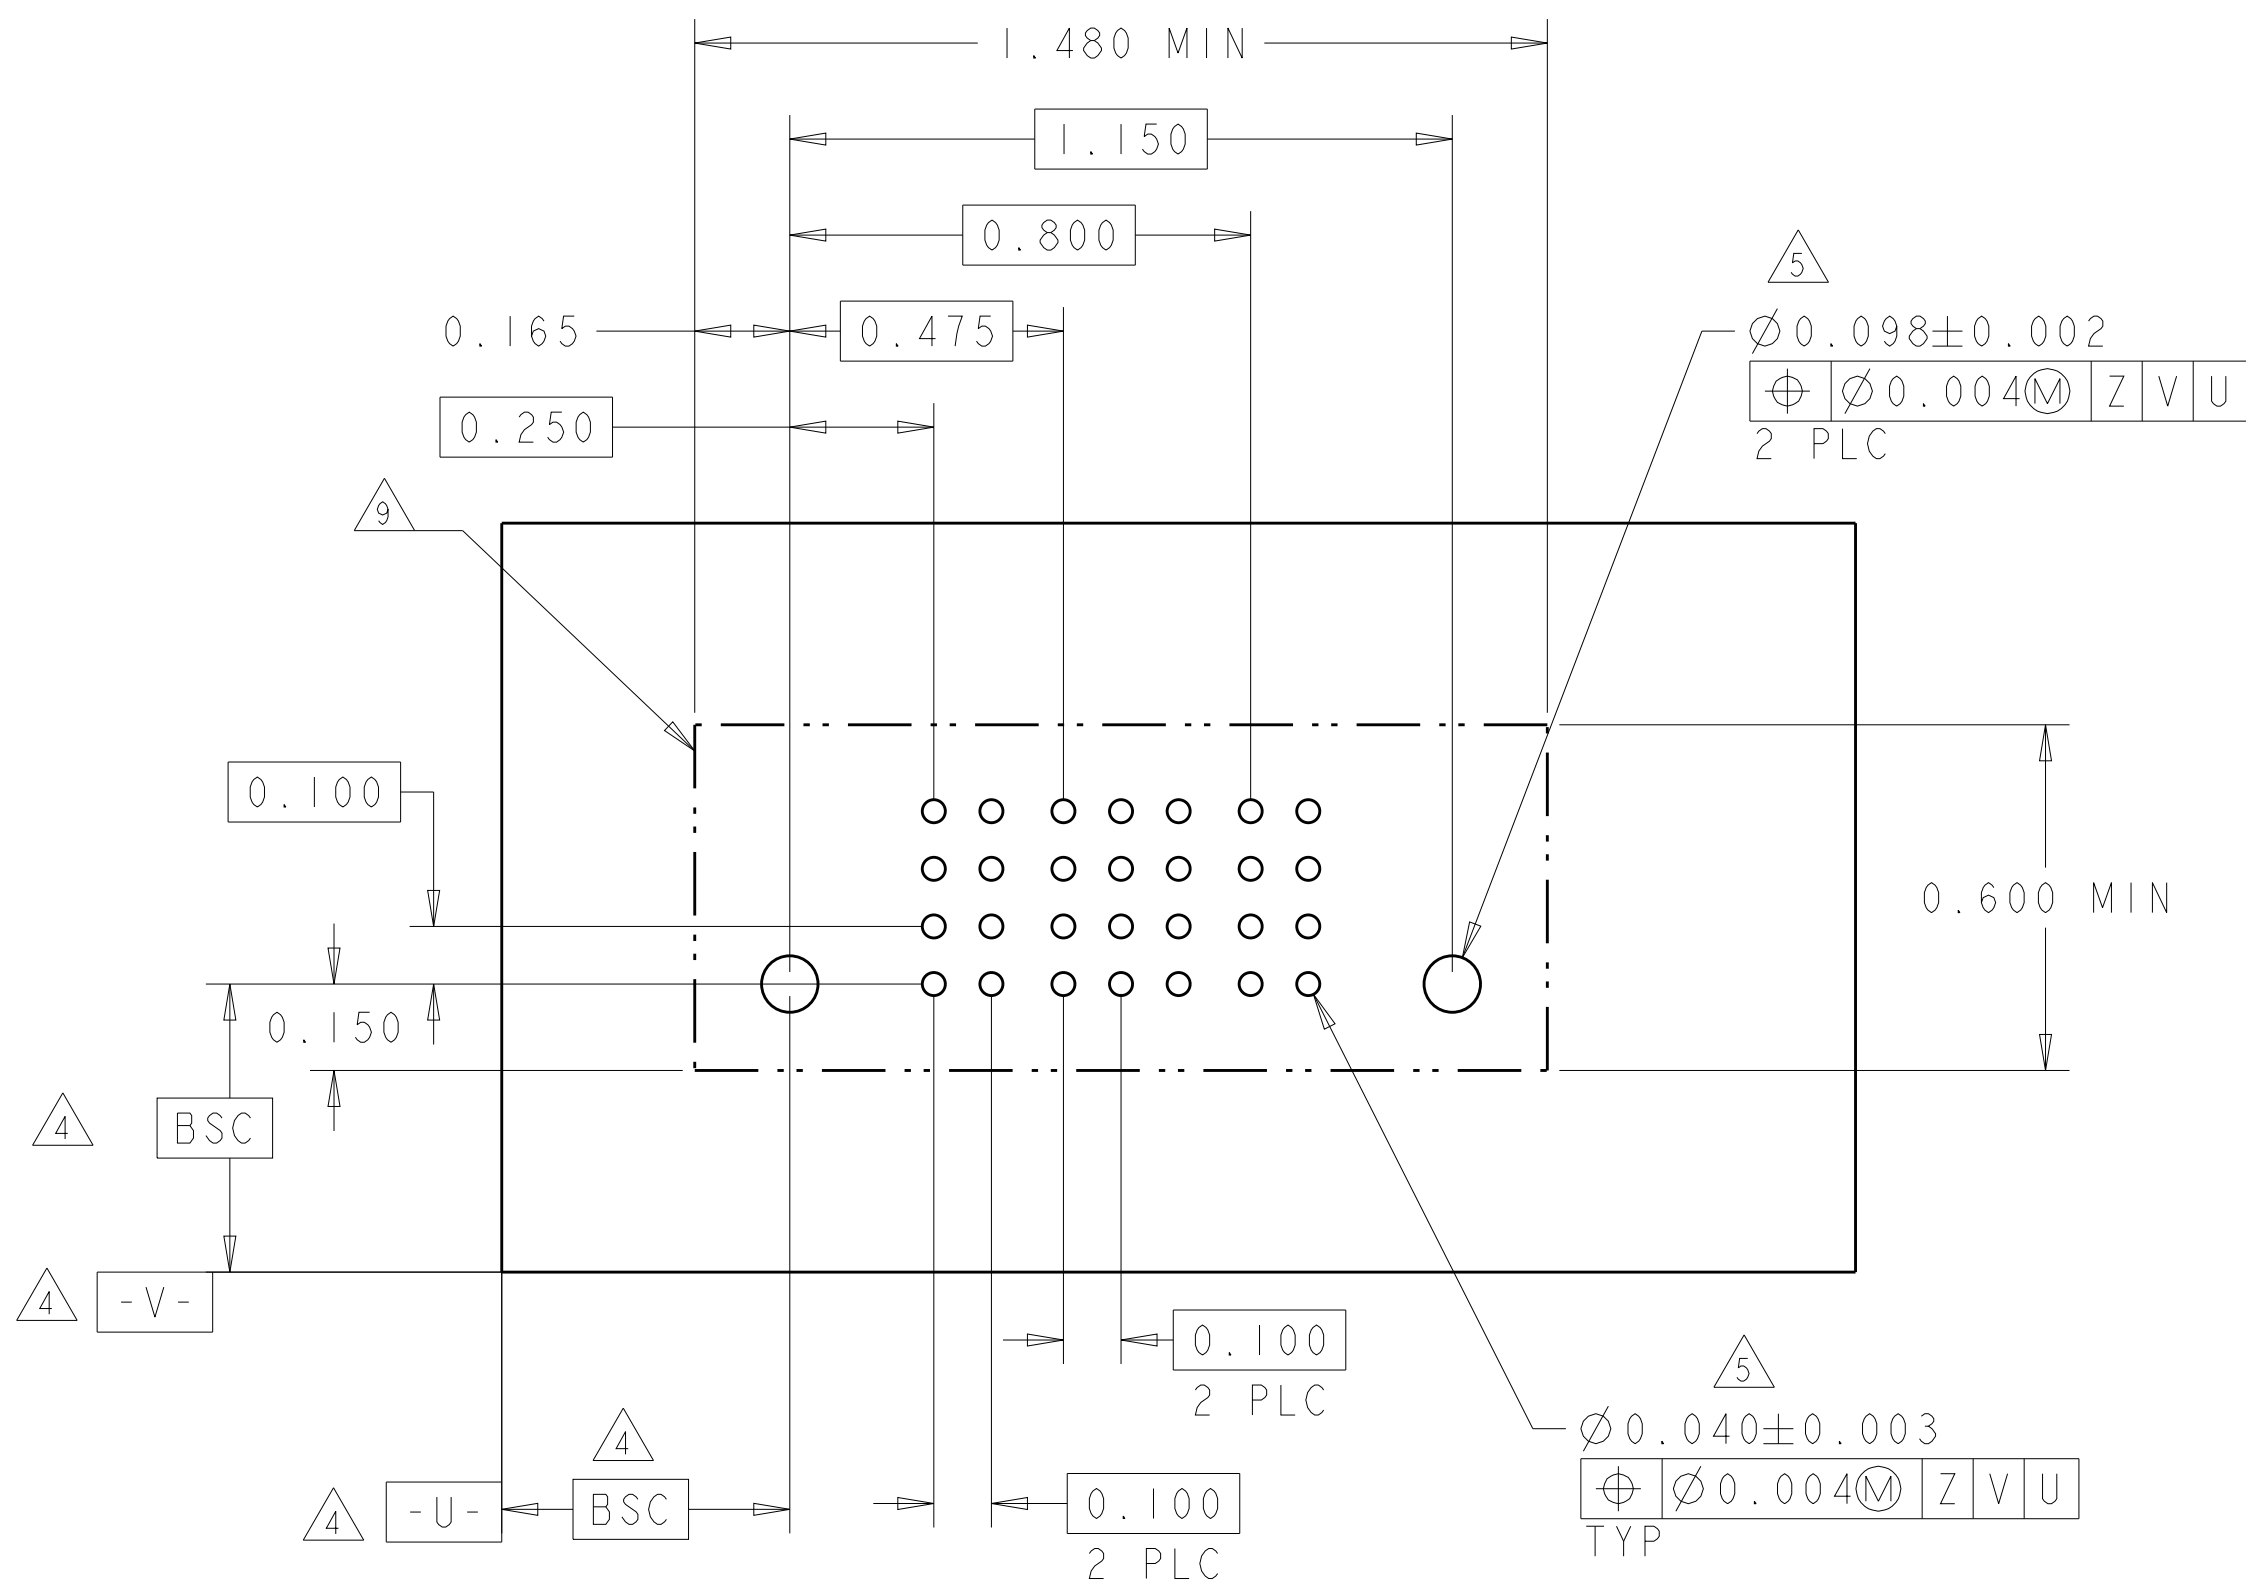
4805 (3/11)

N


4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
4-6600333-4	D		VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	
	C				EV	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	ES	ES	ES	ES	ES			
2P+24S+2P		HD											HD

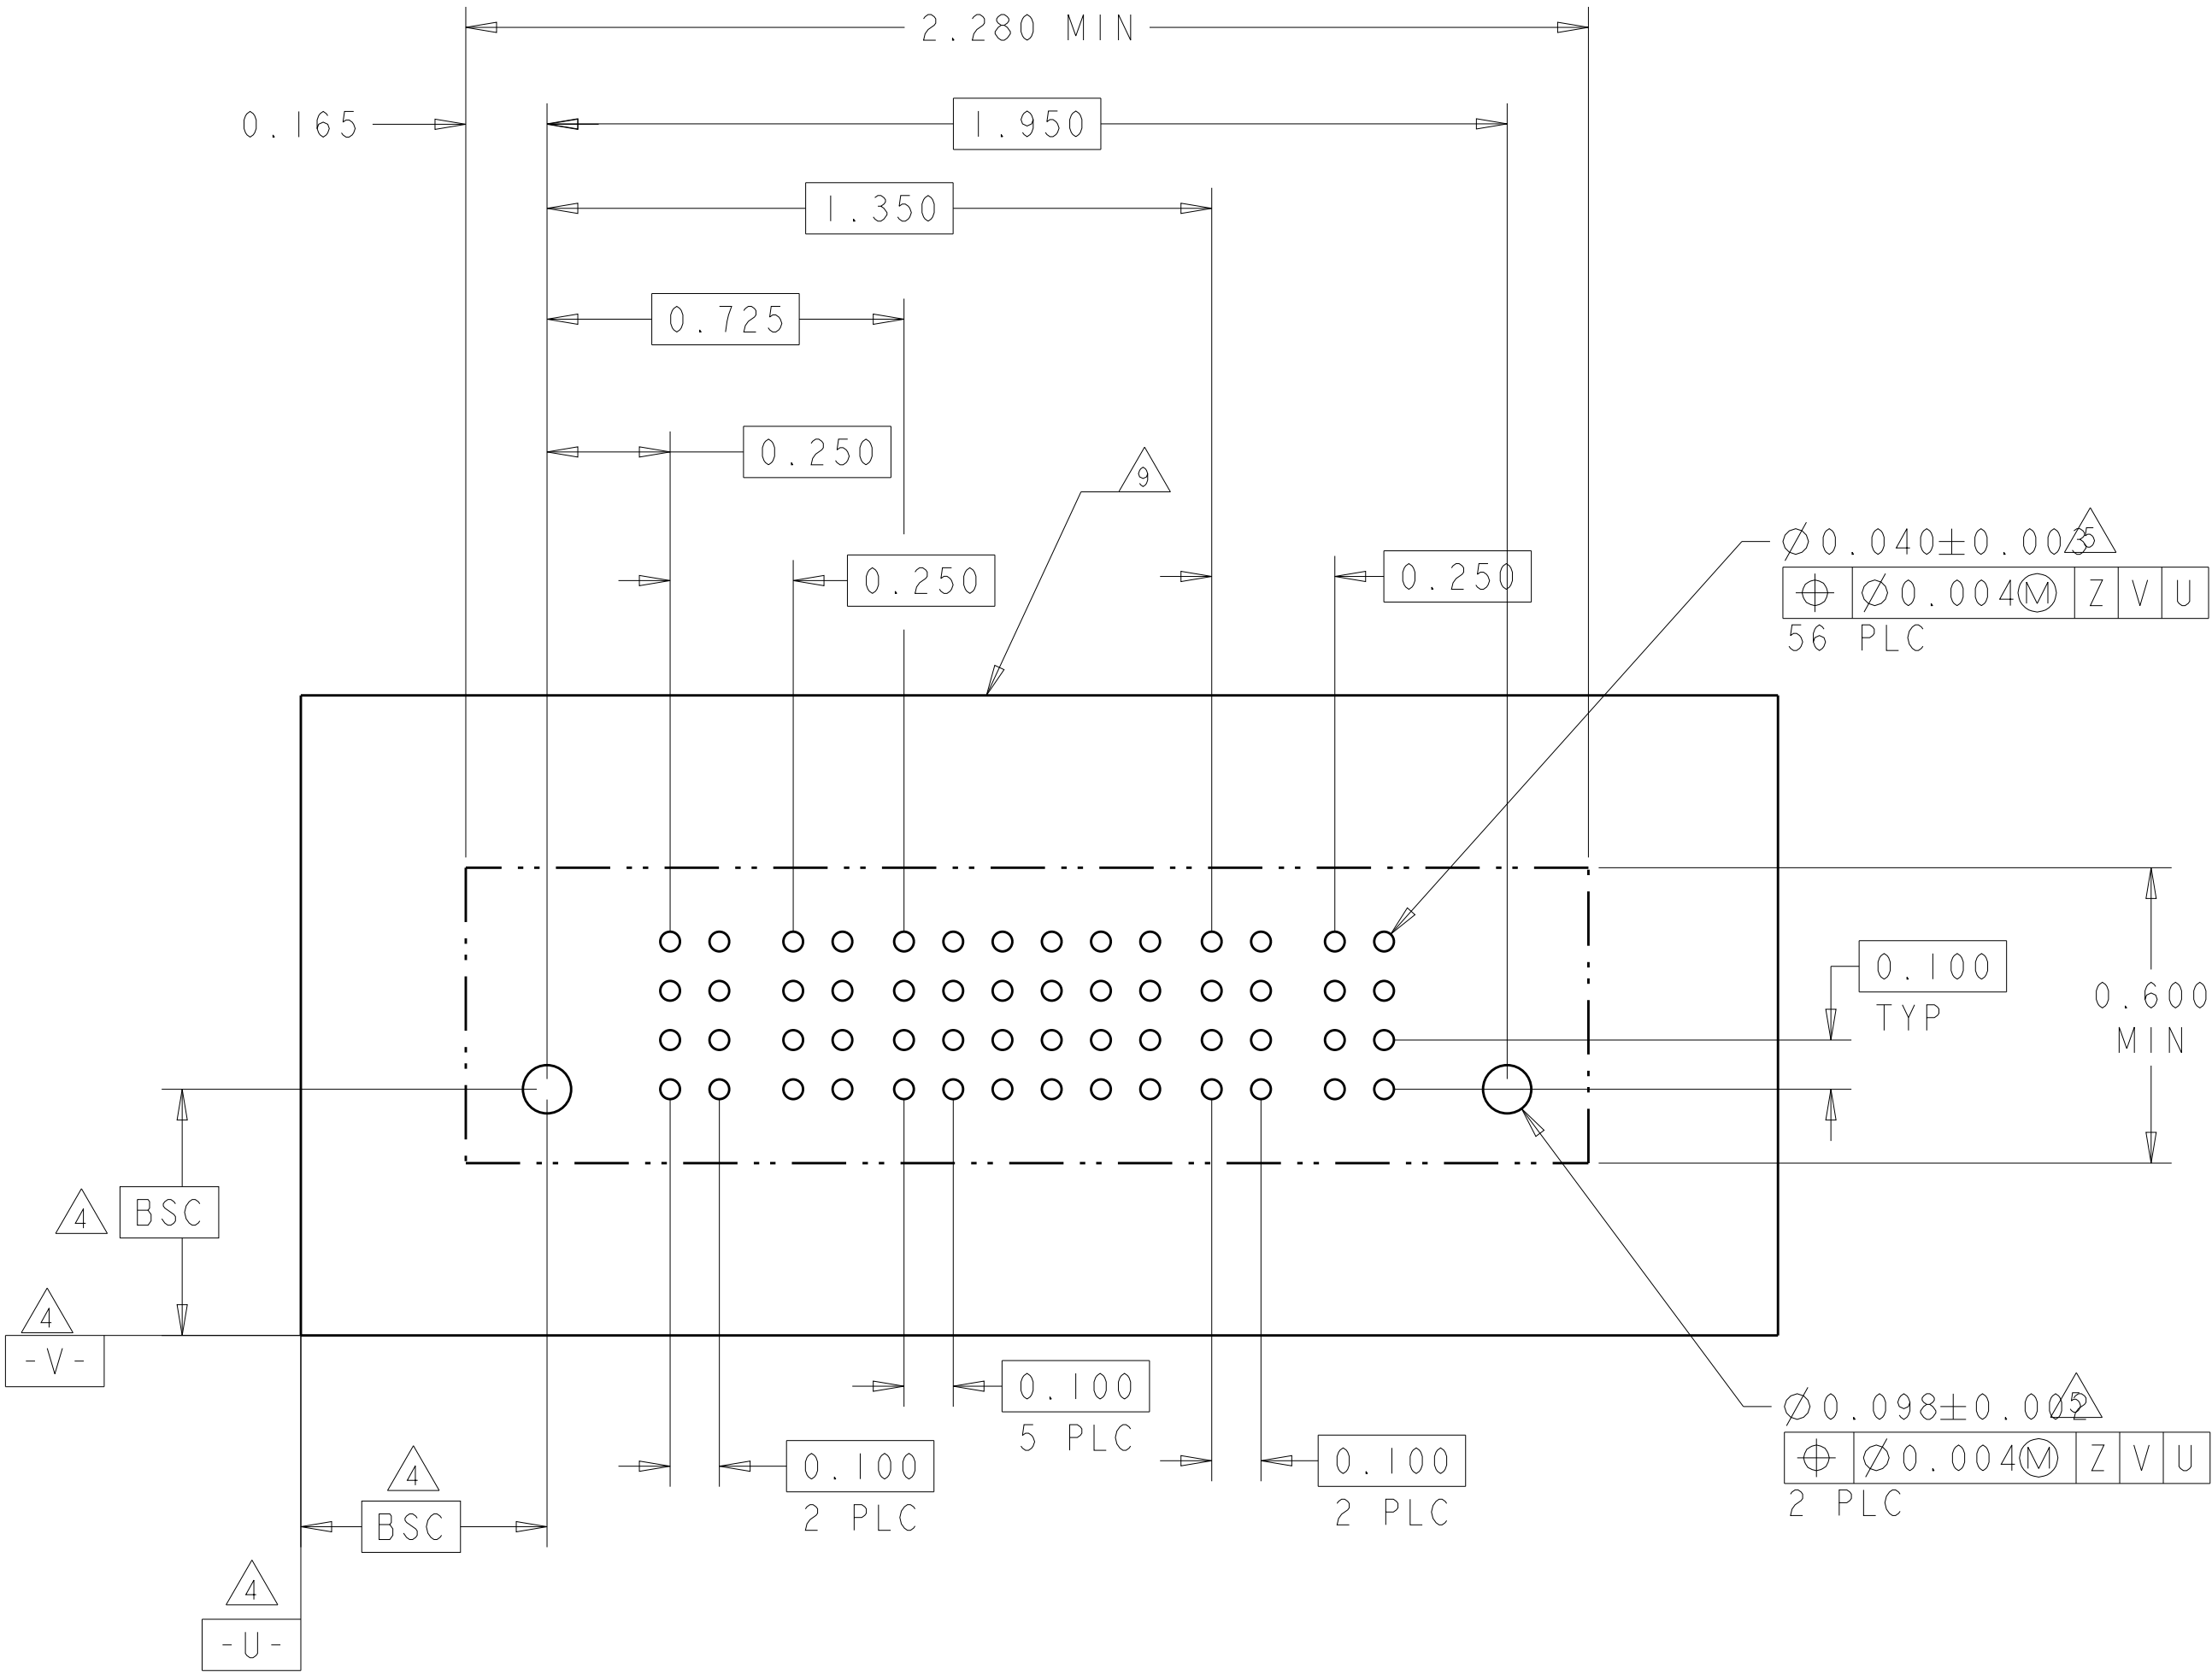

PART NUMBER	ROWS		POWER				SIGNAL			POWER				
			P1	P2	P3	P4	1	2	3	P5	P6	P7	P8	
4-6600333-6	D		VM	VM	VM	VM	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV					
	B						EV	EV	EV					
	A						EV	EV	EV					
4P + 12S + 4P		HD												HD

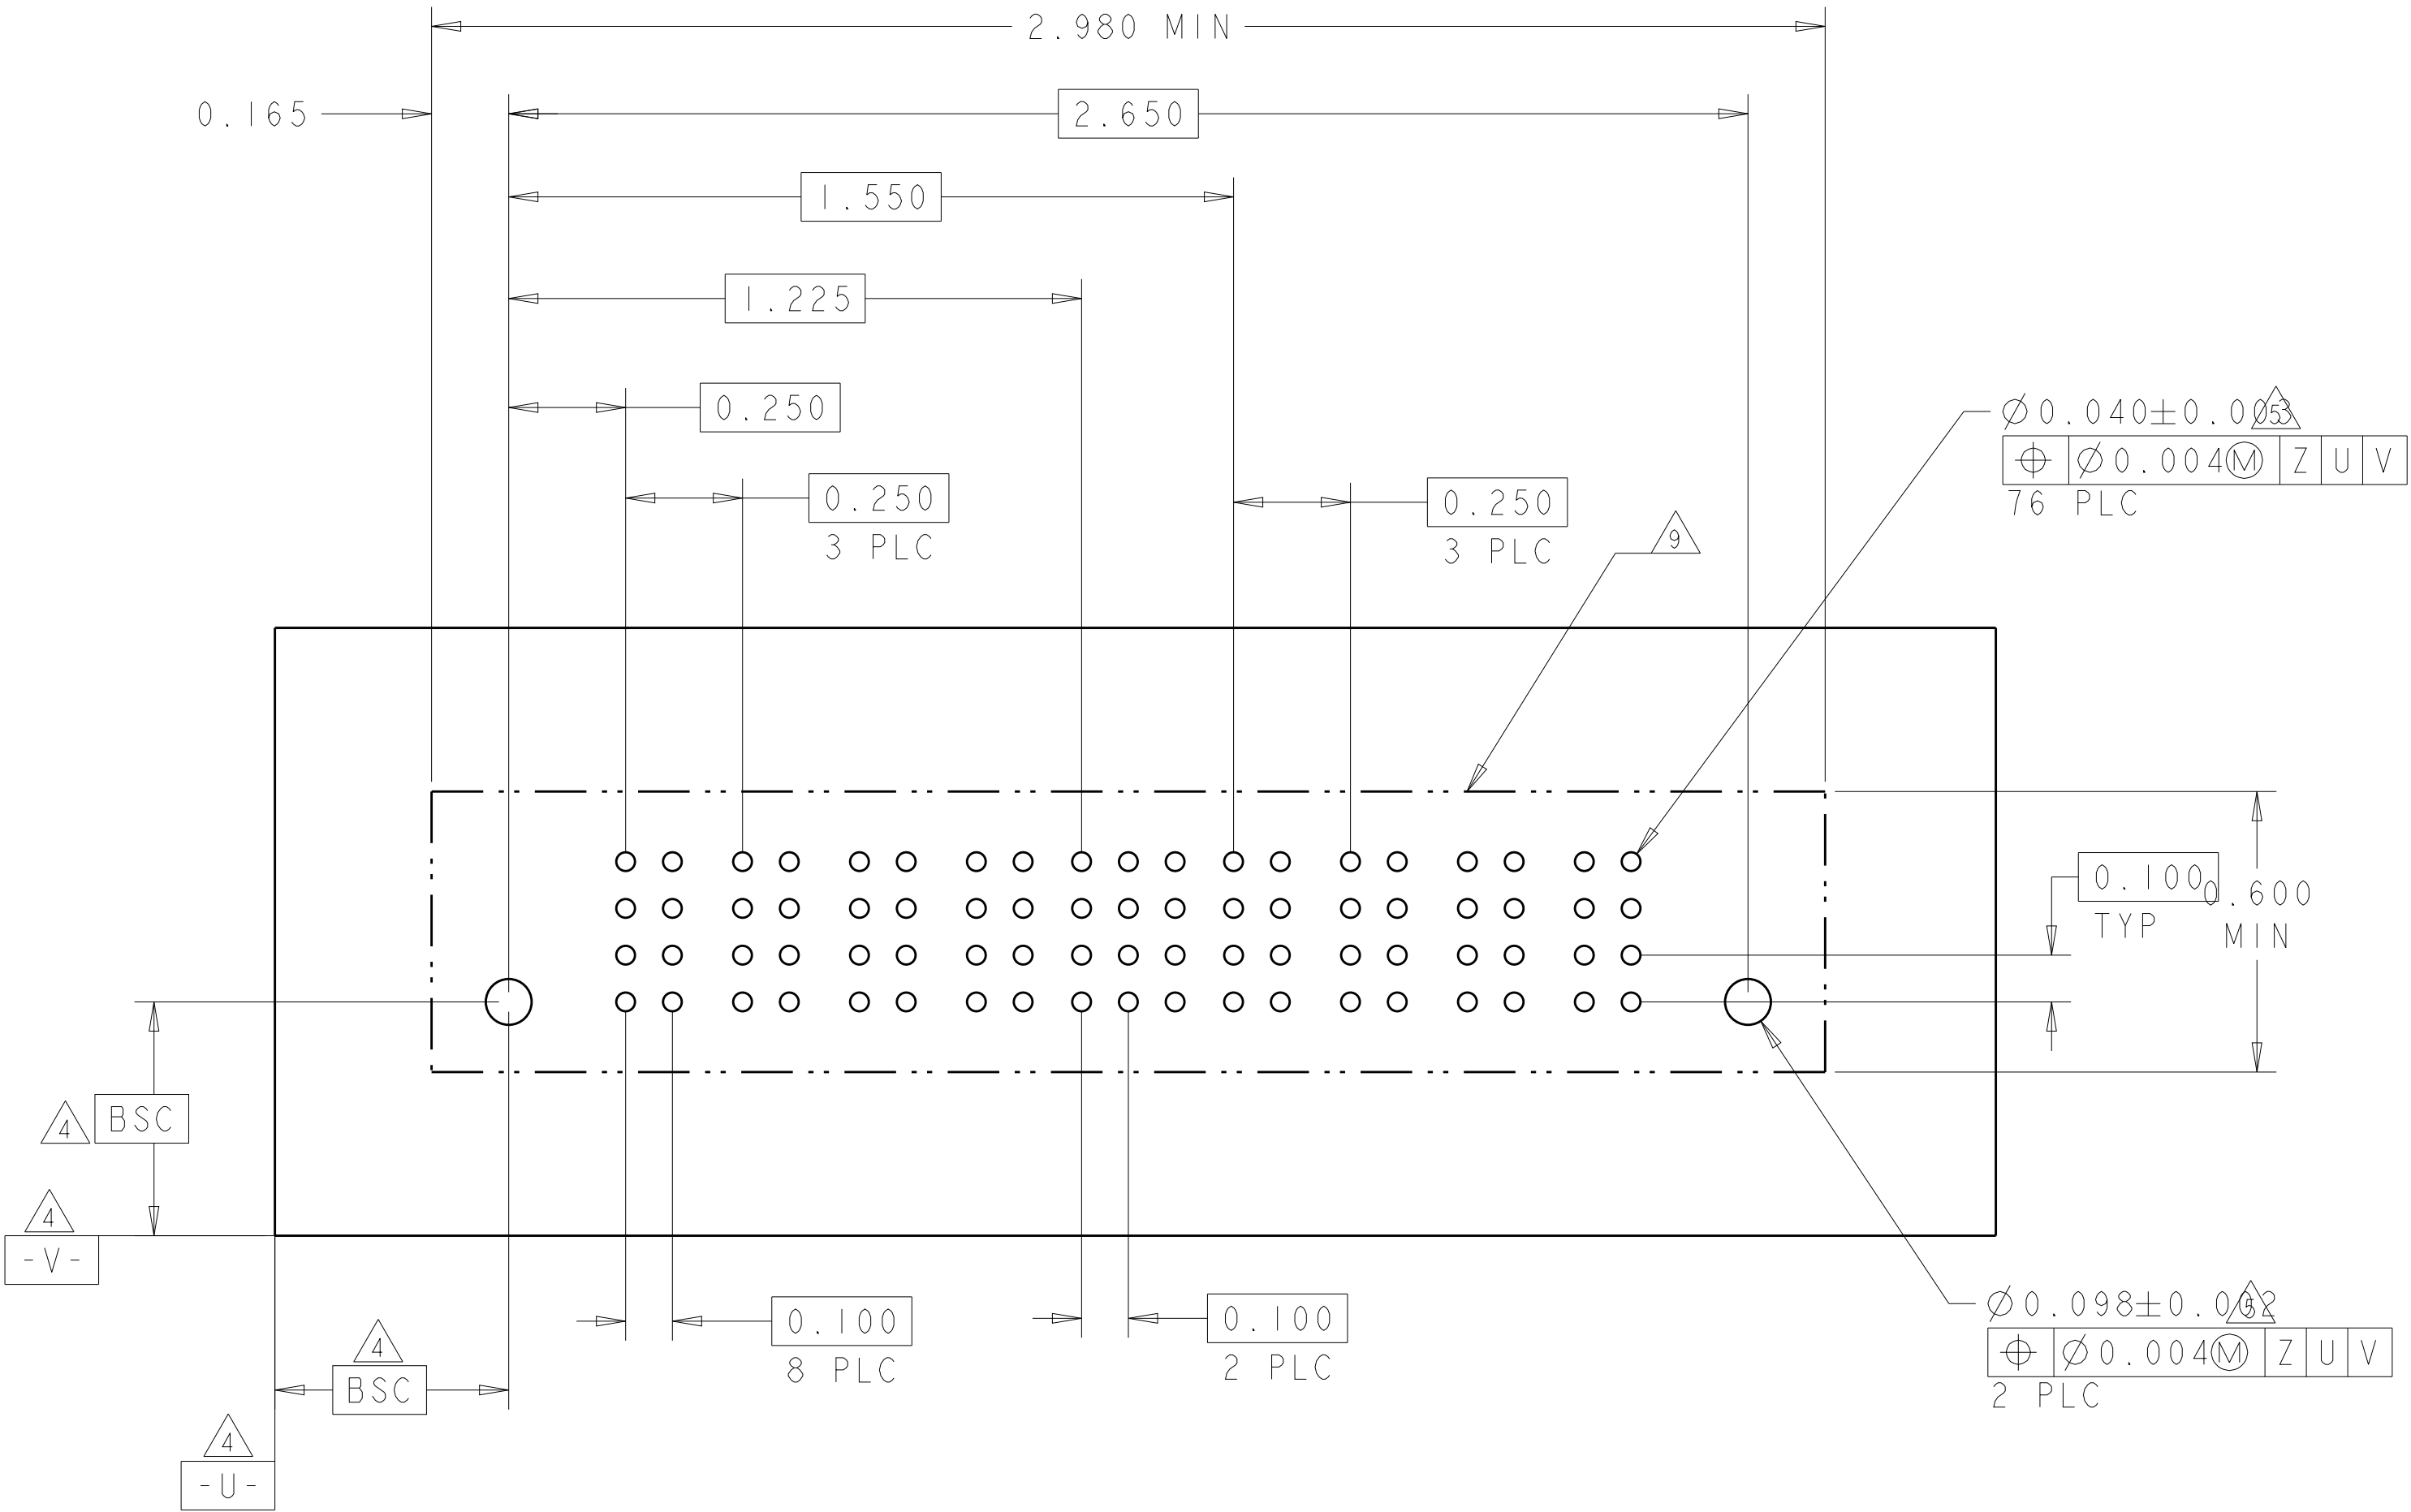

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT

Customer Drawing

SIZE A1
CAGE CODE 00779
DRAWING NO. 6600333



RESTRICTED TO

SCALE 3:1
SHEET 18 OF 22
REV P7

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER			
			P1	P2	1	2	3	4	5	6	P3	P4		
4-6600333-3	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM		
	C				EV	EV	EV	EV	EV	EV				
	B				EV	EV	EV	EV	EV	EV				
	A				EV	EV	EV	EV	EV	EV				
2ACP+24S+2ACP			HD											HD

PART NUMBER	ROWS		POWER		SIGNAL						POWER			
			P1	P2	1	2	3	4	5	6	P3	P4		
4-6600333-5	D		VM	VM	EV	EV	EV	EV	EV	EV	VM	VM		
	C				EV	EV	EV	EV	EV	EV				
	B				EV	EV	ES	EV	EV	EV				
	A				ES	EV	EV	EV	EV	EV				
2ACP+24S+2ACP			HD											HD

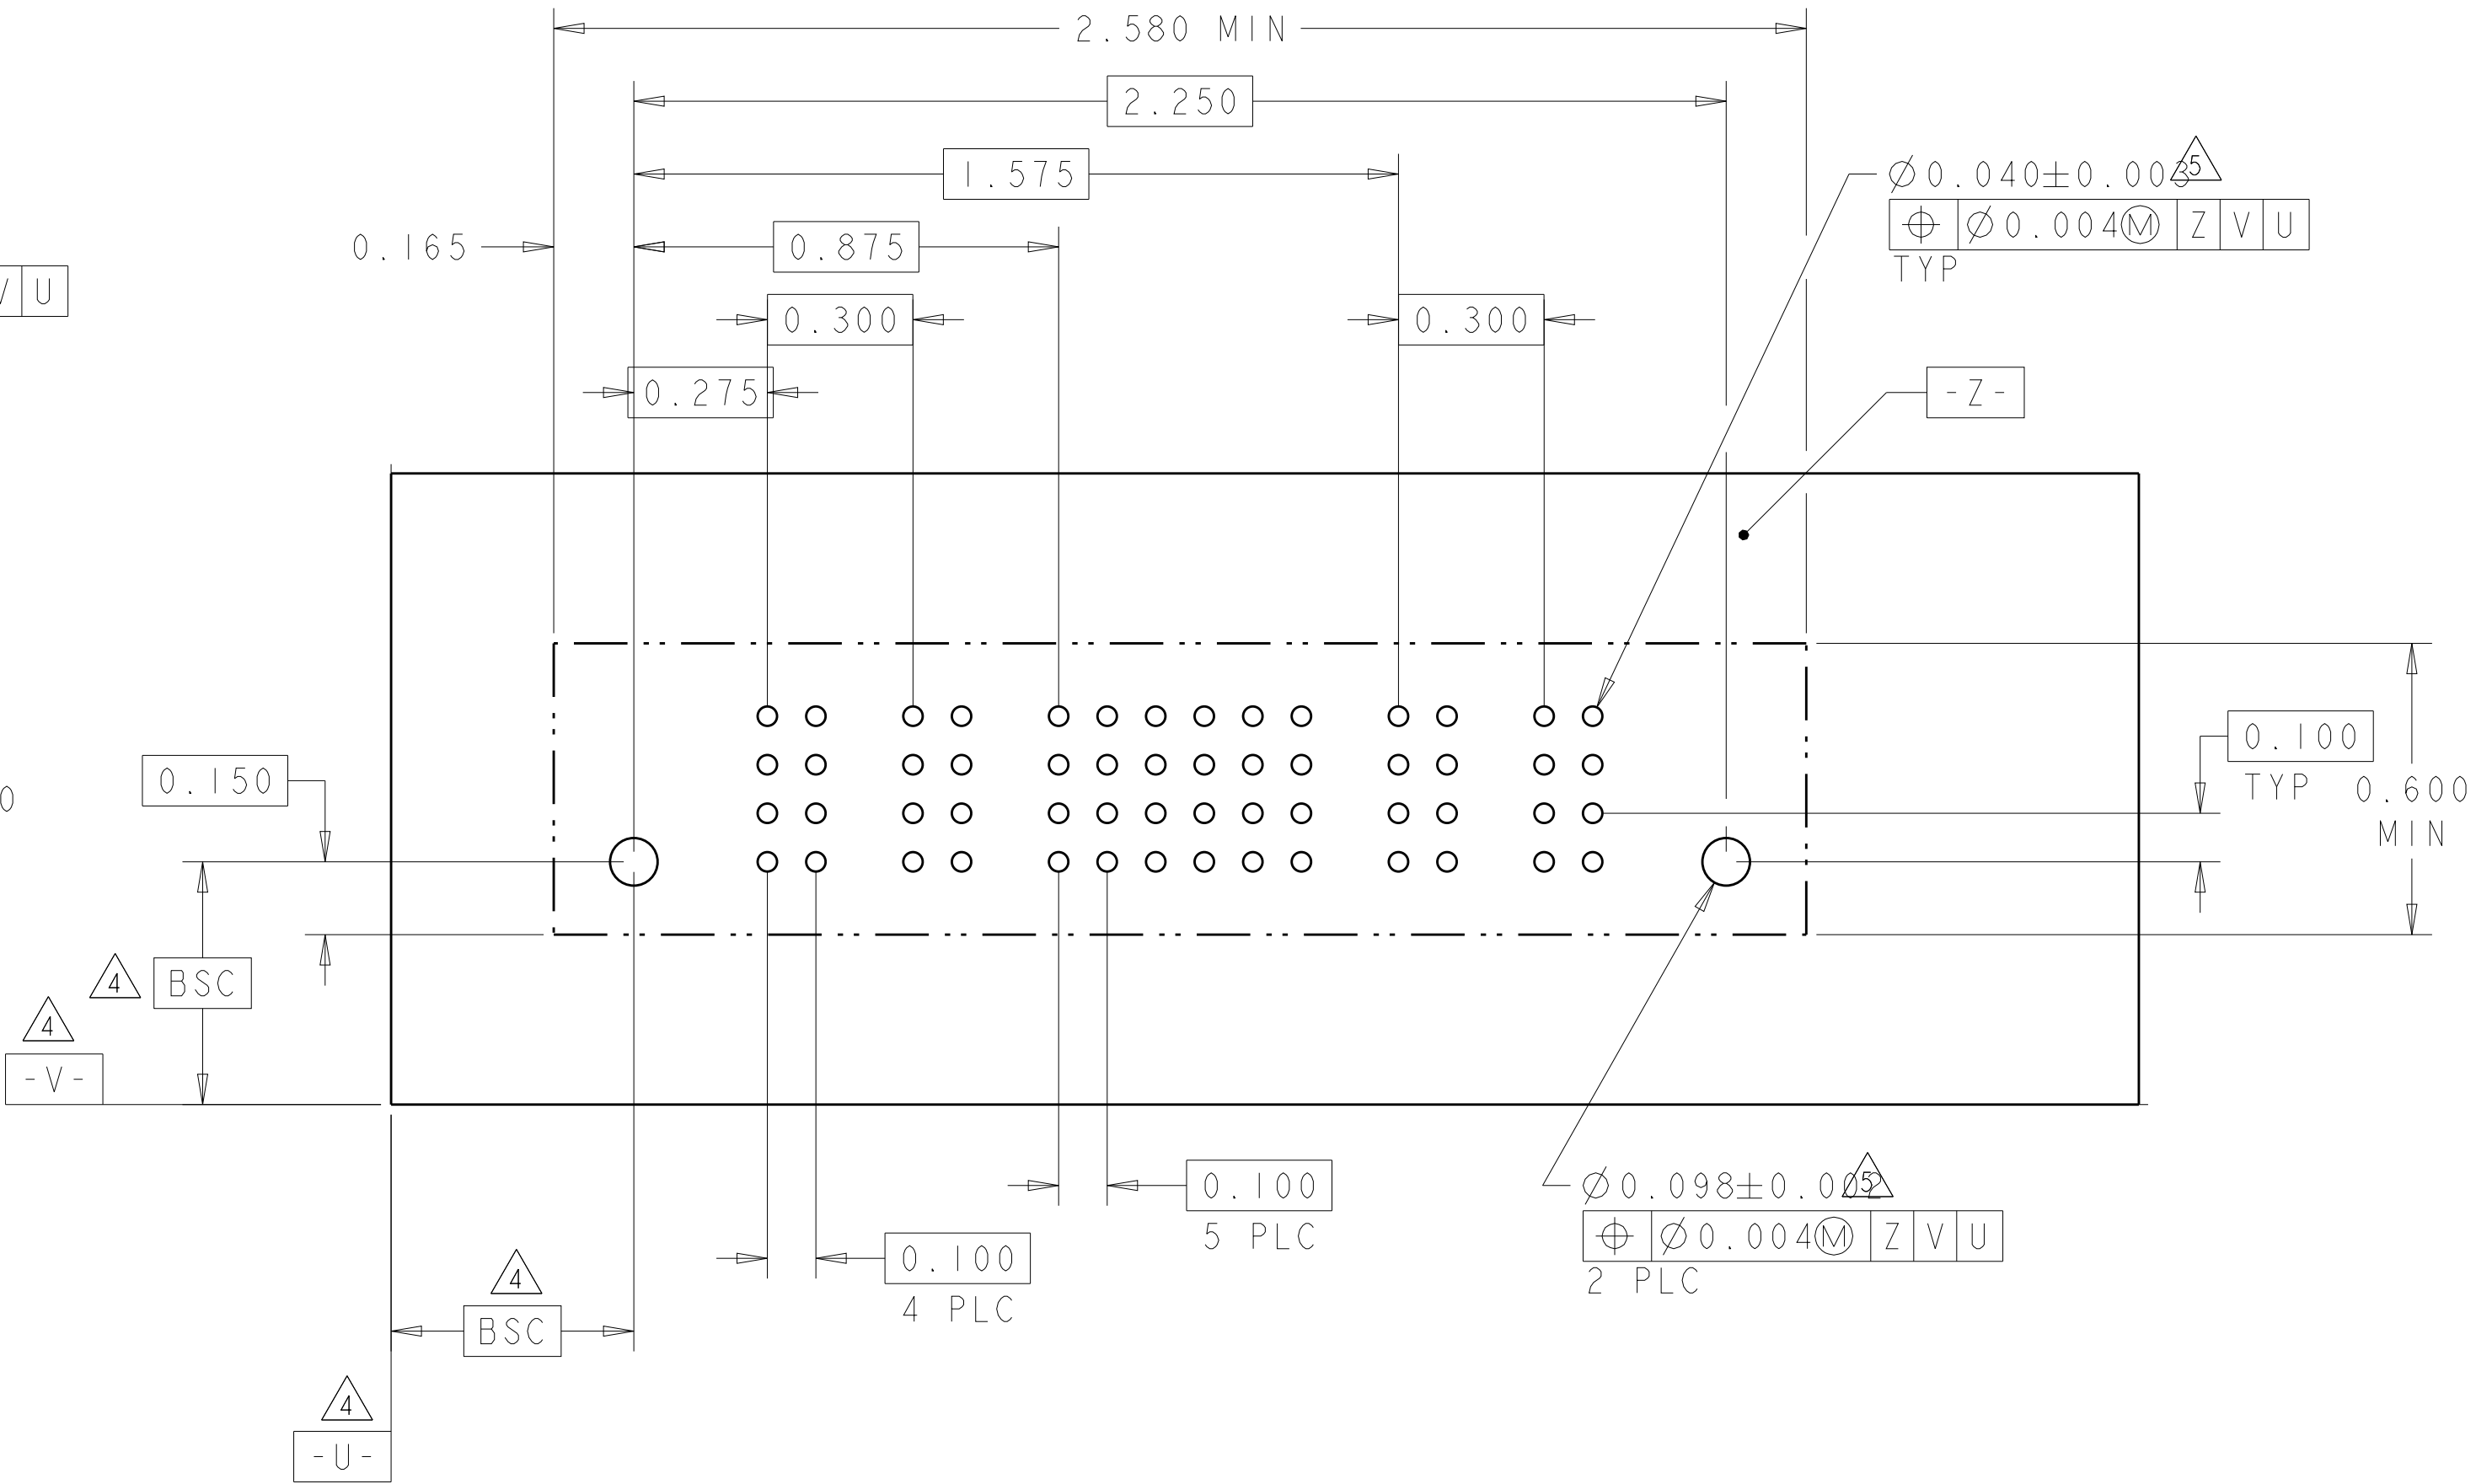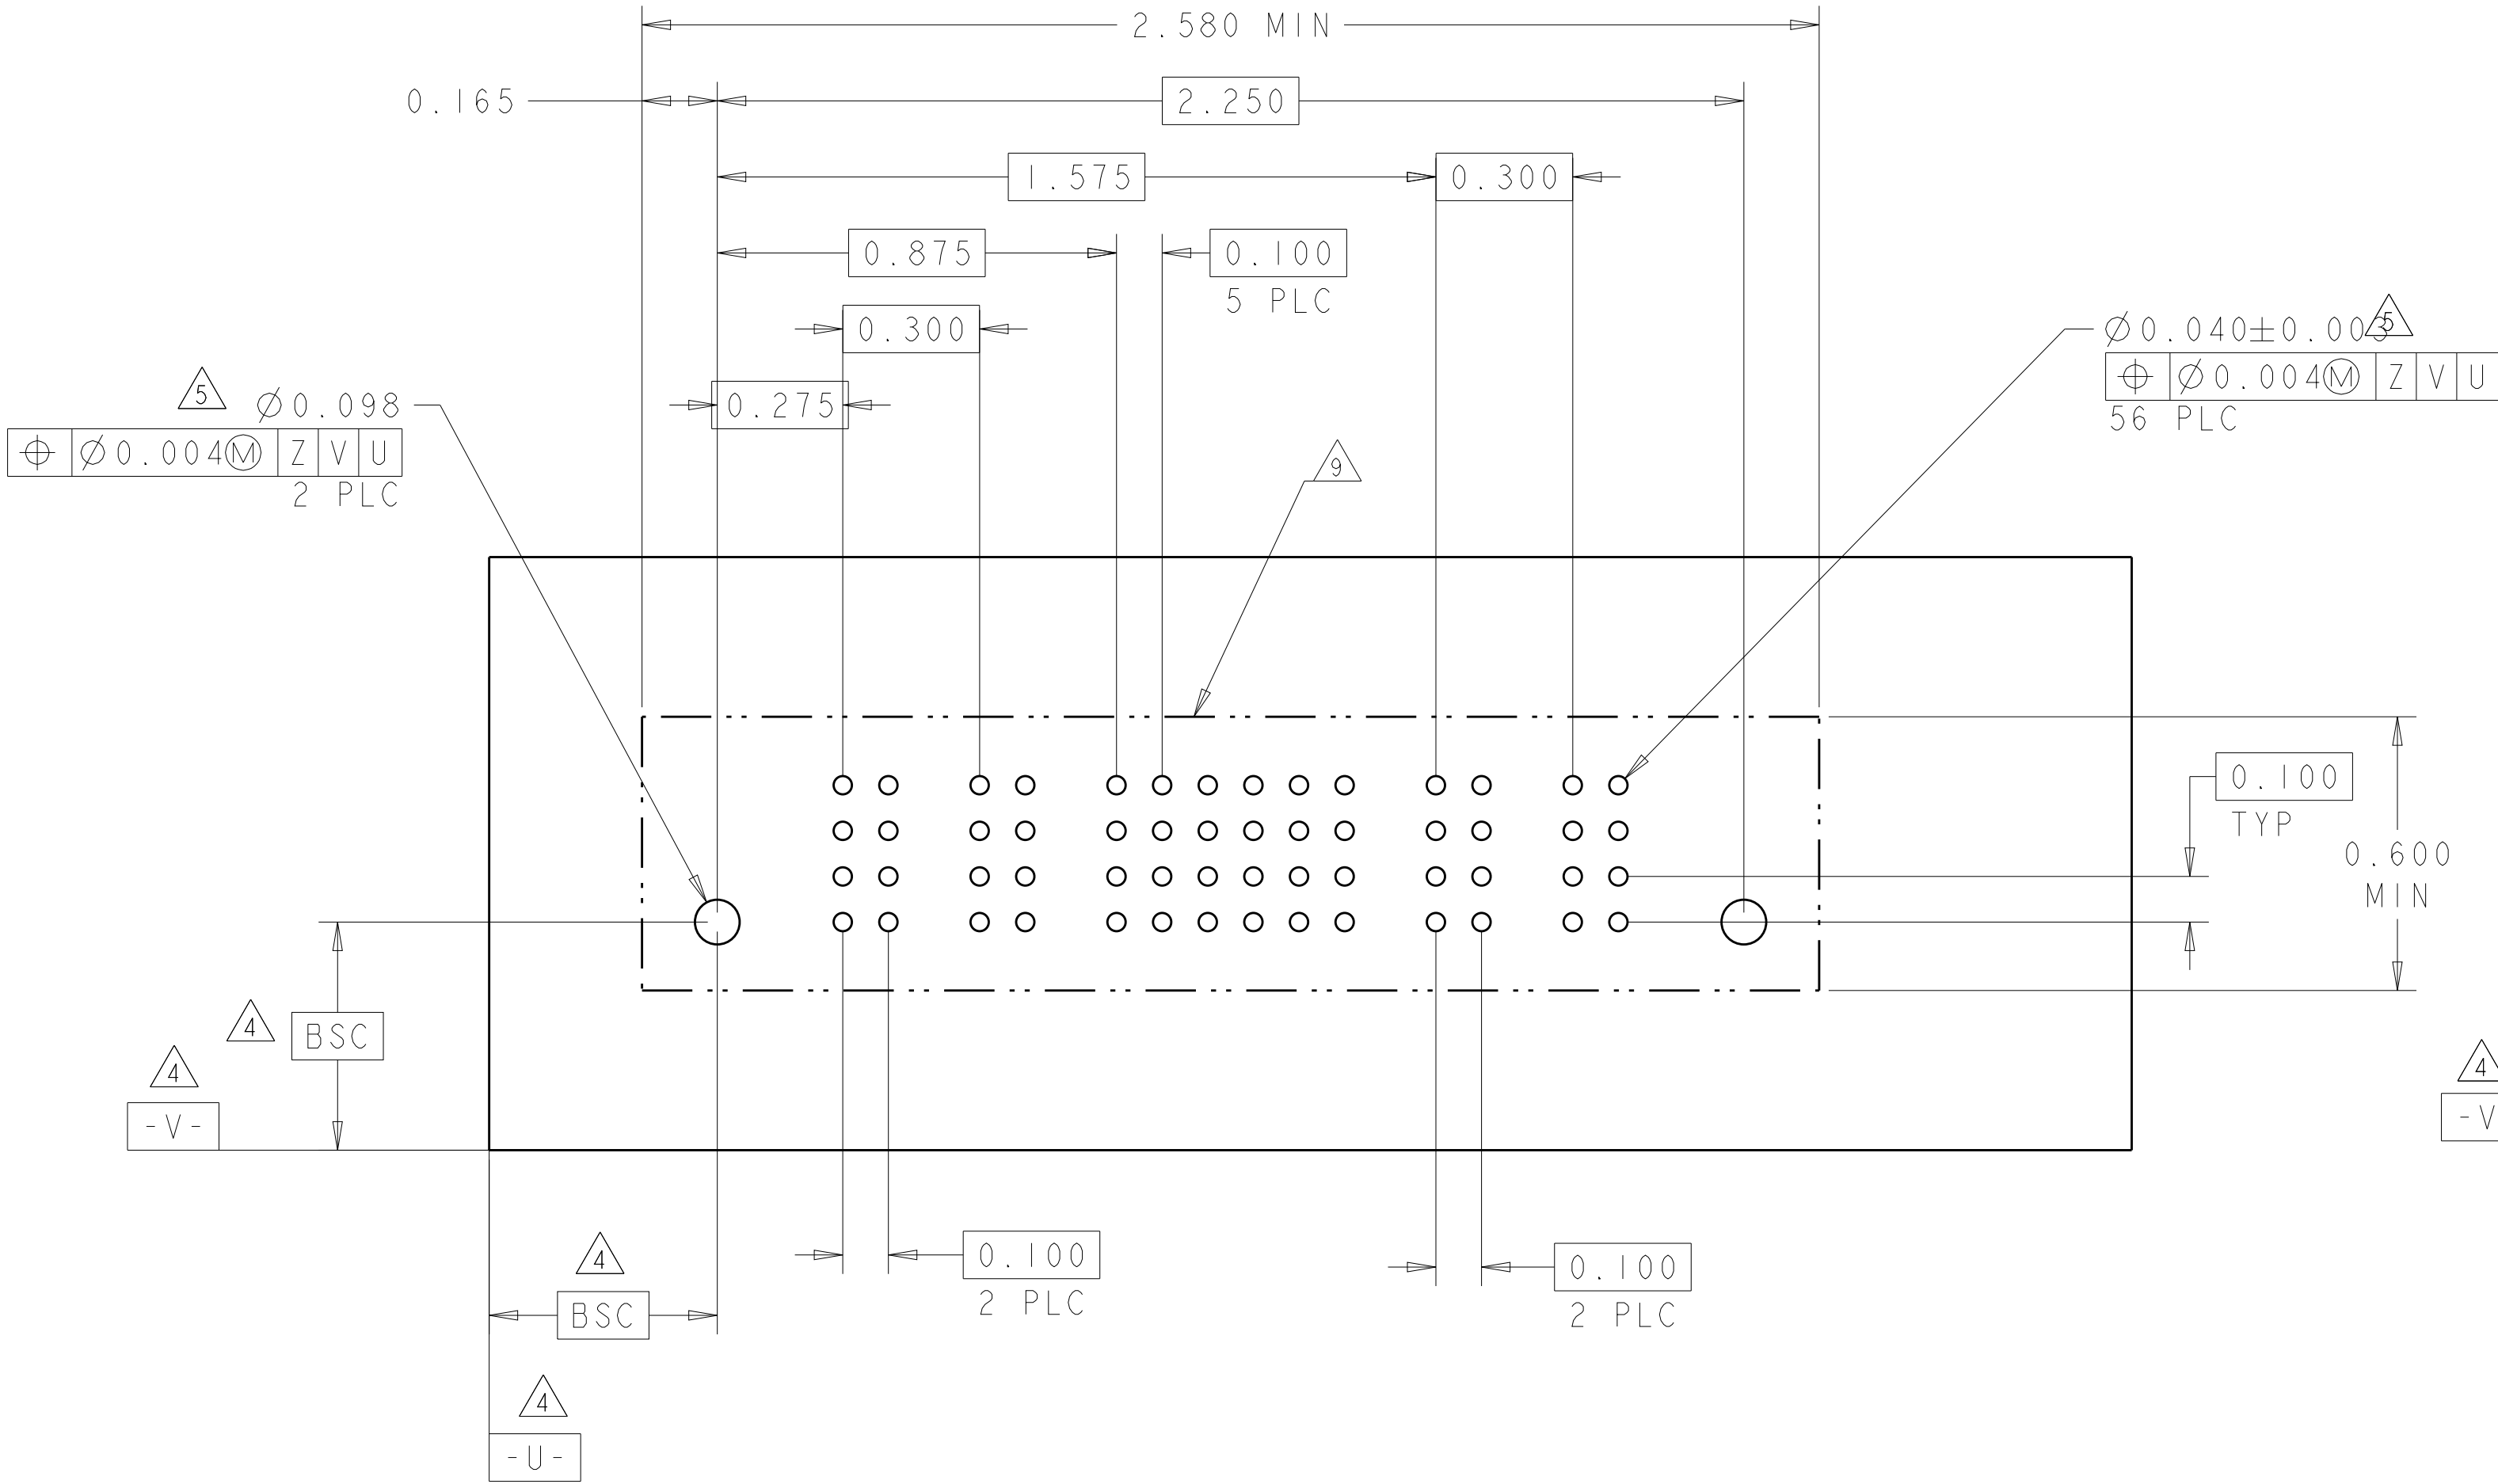


(N7)




9

4805 (3/11)

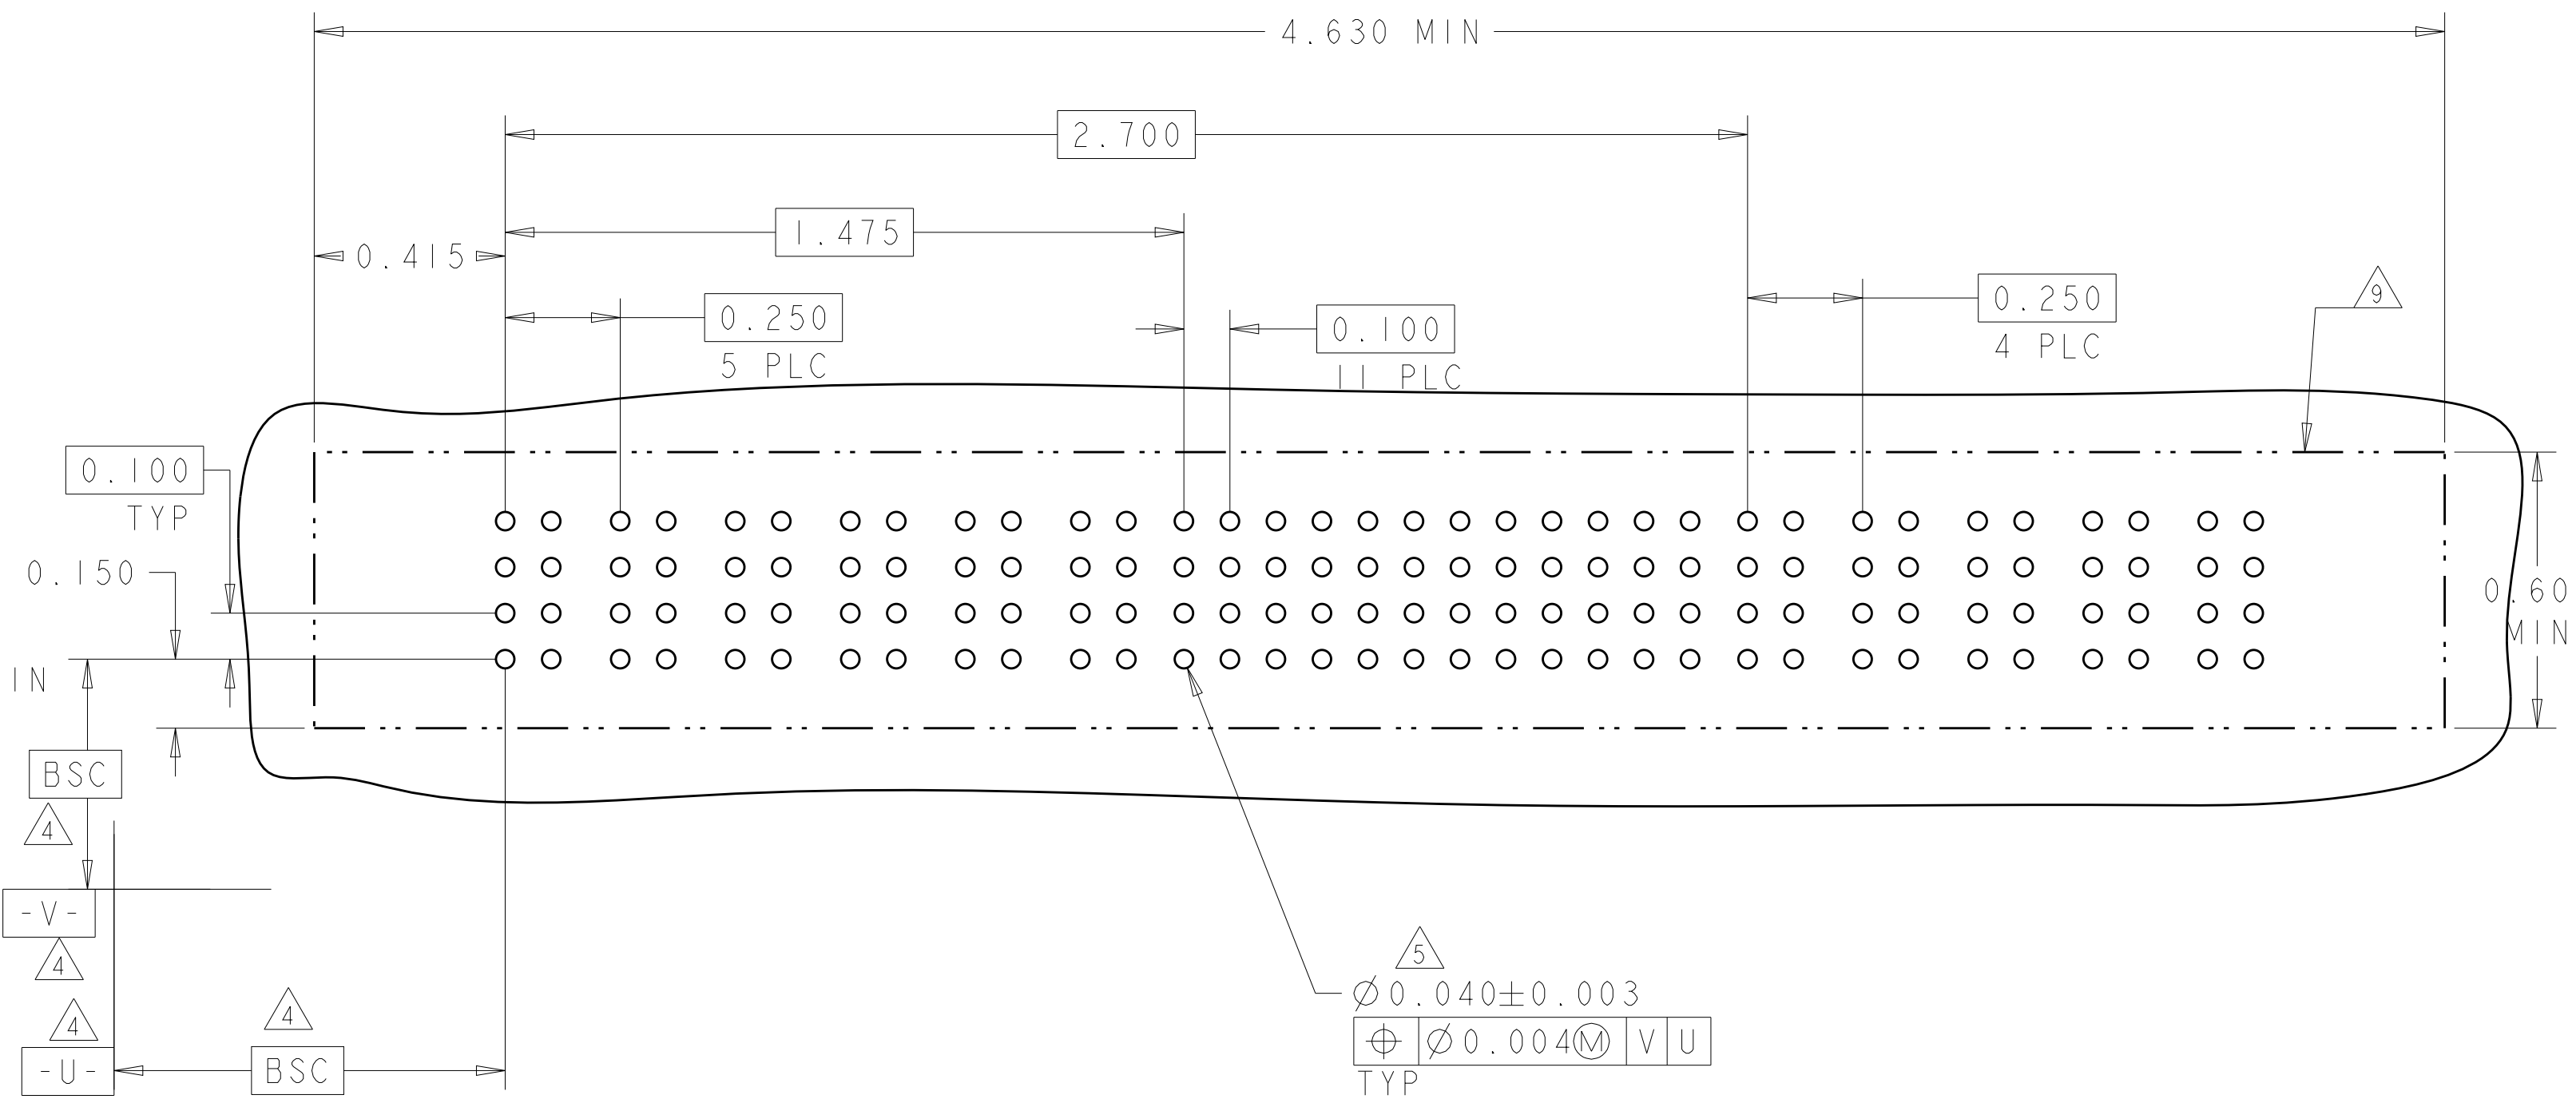[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL												POWER		
			P1	P2	1	2	3	4	5	6	7	8	9	10	11	12	P3	P4	
5-6600333-2	D		VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM		
	C				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV				
	B				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV				
	A				ES	ES	ES	ES	ES	ES	EV	EV	EV	EV	EV				EV
2P+48S+2P																			

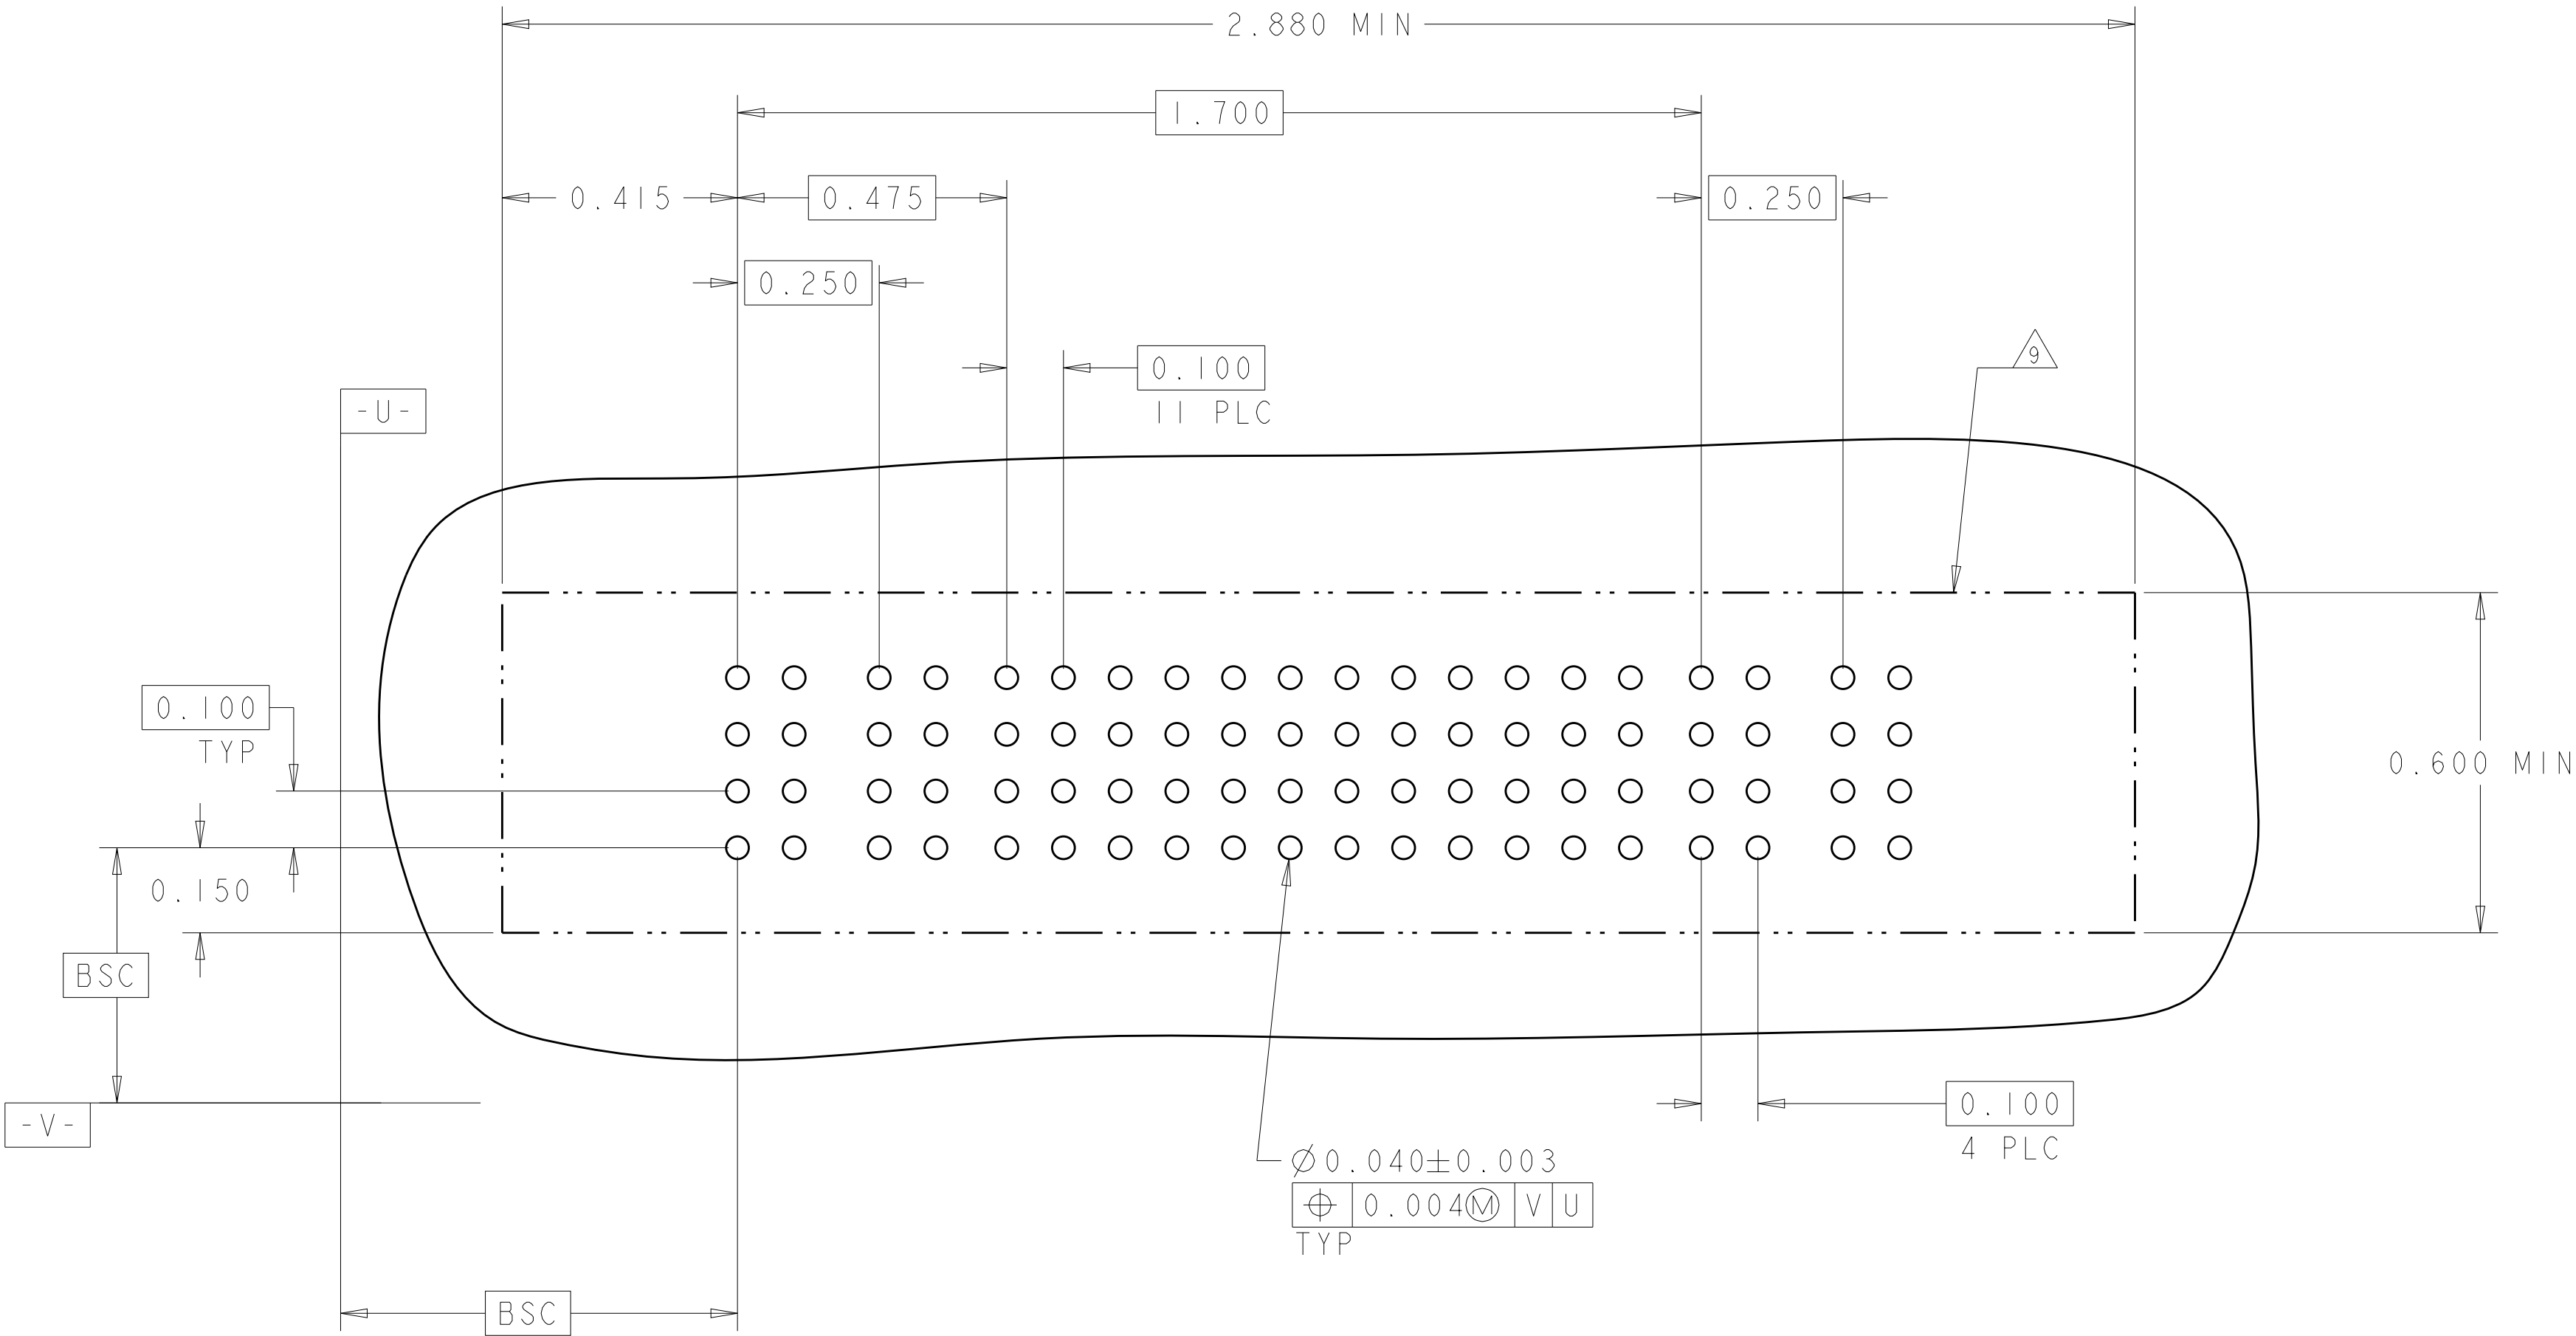

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005			NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005				
		APVD R. WHYNE 23MAR2005	PRODUCT SPEC		SIZE	
			108-1973		CAGE CODE	
			APPLICATION SPEC		DRAWING NO	
			114-13038		REV	
MATERIAL			WEIGHT		Customer Drawing	
-			-		SCALE 3:1	
					SHEET 22 OF 22	
					REV P7	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-6600333-2](#)