

SPECIFICATIONS

FUNCTION:
2P1T OFF-(ON)

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):
18A 125VAC [cURus]
12A 250VAC [cURus]

EN61085-1:
12(10)A 250V~ SE4 [T0V]

OPERATING FORCE:
3.0mNf±0.5kgf

ELECTRICAL LIFE:
6,000 Cycles [cURus]
50,000 Cycles [T0U]






APPROVALS:



COLORS

BODY:
White
ACTUATOR:
Black
LOCK:
None

SCHEMATIC

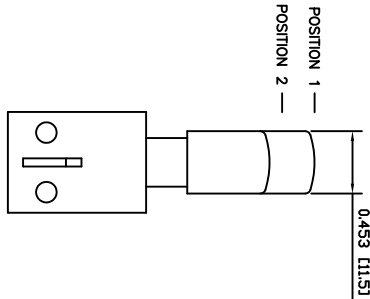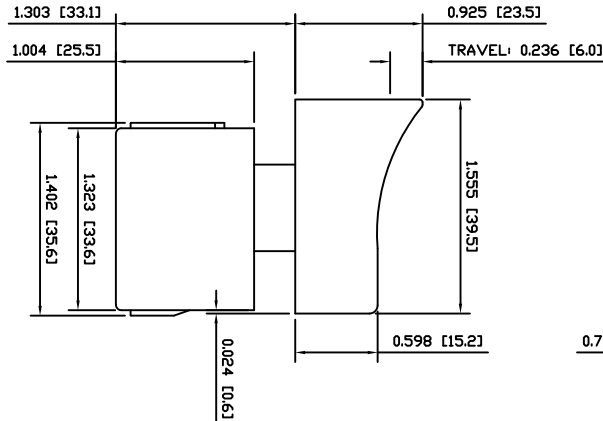

REV.	DATE	BY
1	10/07/21	CAB
A	09/07/10	CAB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

REV.	A
------	---

RELEASE FOR PRODUCTION
DESCRIPTION

PCB	DATE	DRAWN BY
-----	------	----------

20446
02/08/12

SCALE	PROJECTION
-------	------------

DRAWING NOT TO SCALE
1:1

DRAWING NUMBER	DATE	VERSION
----------------	------	---------

34-HY156E7/0910000
FEBRUARY 08, 2012
A



HY15-6E7-091-0000



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[HY15-6E7-091-0000](#)