




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		K2		REVISED PER ECO-11-004820	11MAR11	RK	HMR

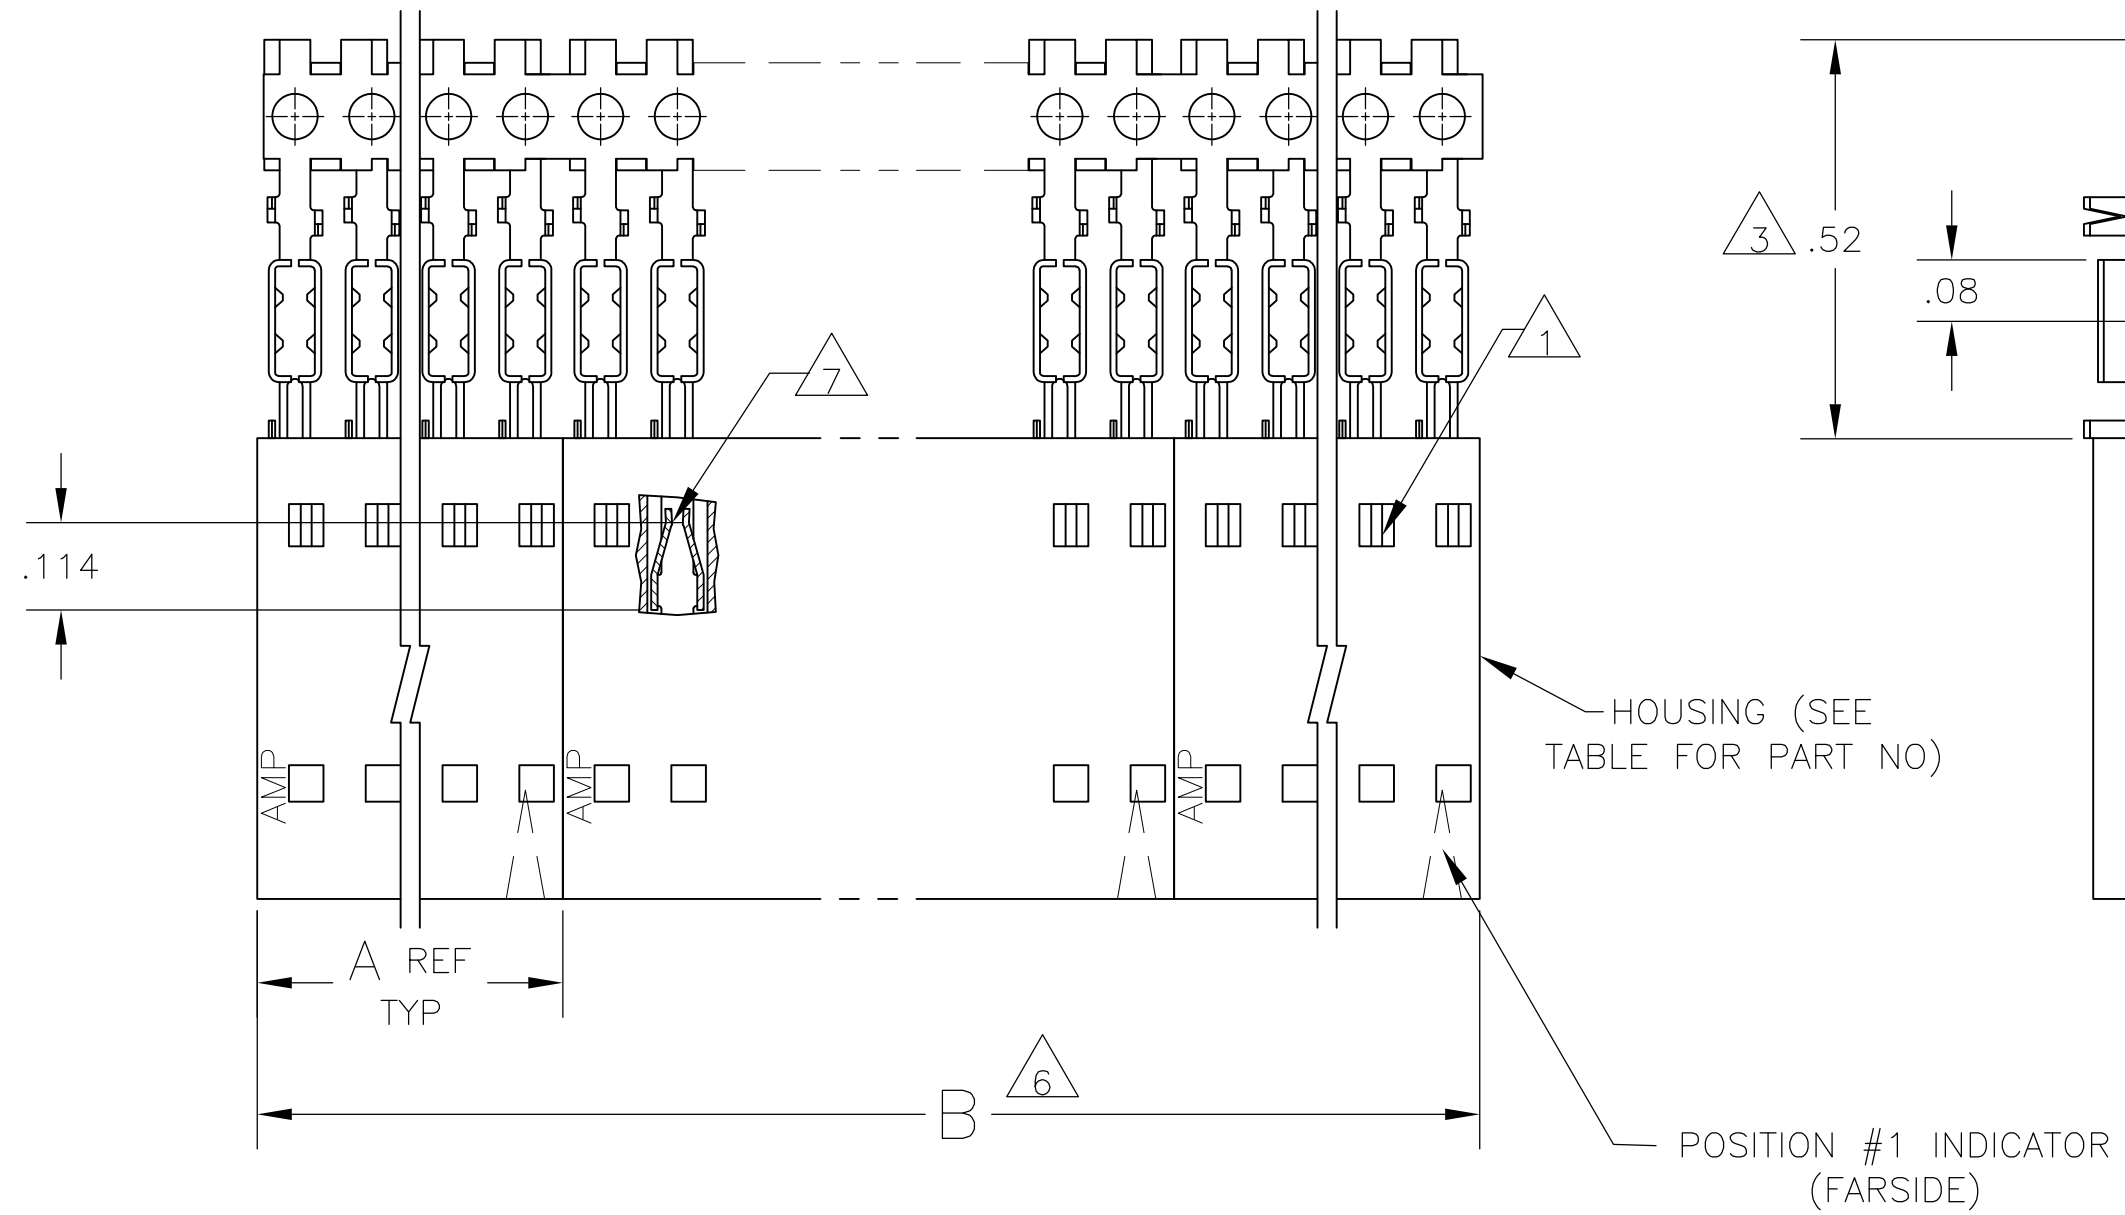

CONTACT IDENTIFICATION LETTER "B" (LOCATED IN THIS AREA)

OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI

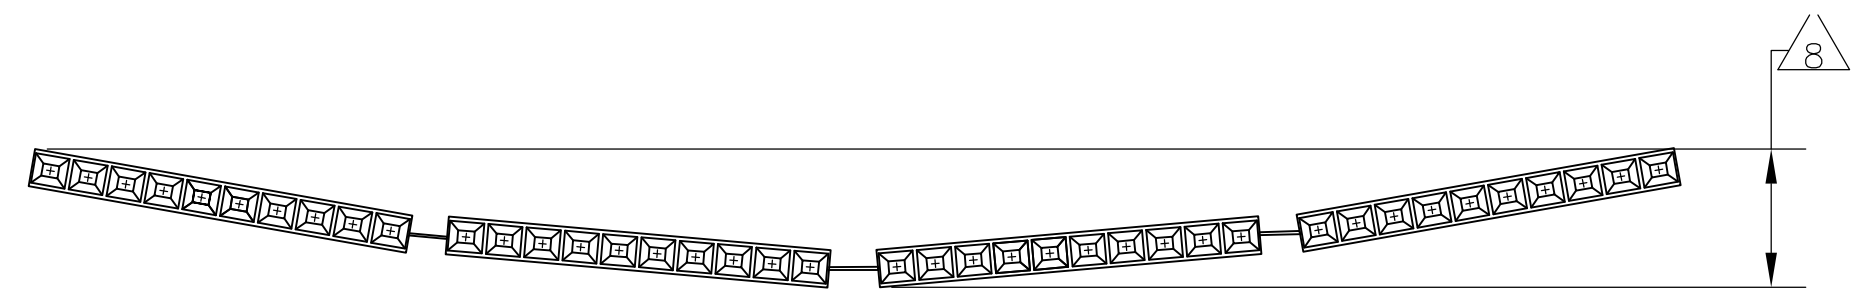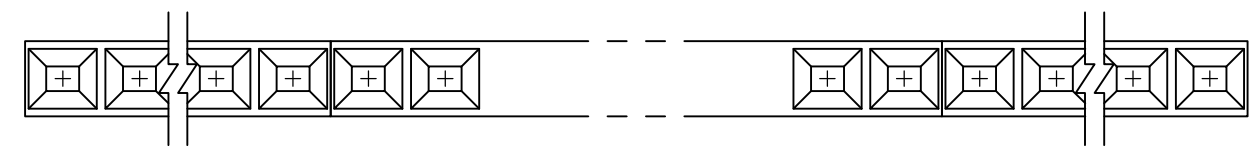

EXAMPLE: STRIP ASSEMBLY  
SCALE 2:1

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103687
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 10 CONTACTS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.

11	OBsolete	10	2	2.40	1.198	1-103688-1	12	6-103974-1	
11	OBsolete	10	2	2.20	1.098	1-103688-0	11	6-103974-0	
11	OBsolete	10	2	2.00	.998	103688-9	10	5-103974-9	
11	OBsolete	10	2	1.80	.898	103688-8	9	5-103974-8	
		10	2	1.60	.798	103688-7	8	5-103974-7	
		10	2	1.40	.698	103688-6	7	5-103974-6	
		10	4	2.39	.598	103688-5	6	5-103974-5	
		10	4	1.99	.498	103688-4	5	5-103974-4	
		10	5	1.99	.398	103688-3	4	5-103974-3	
		10	8	2.40	.298	103688-2	3	5-103974-2	
		10	10	2.00	.198	103688-1	2	5-103974-1	
		9	2	2.40	1.198	1-103688-1	12	1-103974-1	
11	OBsolete	9	2	2.20	1.098	1-103688-0	11	1-103974-0	
		9	2	2.00	.998	103688-9	10	103974-9	
11	OBsolete	9	2	1.80	.898	103688-8	9	103974-8	
		9	2	1.60	.798	103688-7	8	103974-7	
		9	2	1.40	.698	103688-6	7	103974-6	
		9	4	2.39	.598	103688-5	6	103974-5	
		9	4	1.99	.498	103688-4	5	103974-4	
		9	5	1.99	.398	103688-3	4	103974-3	
		9	8	2.40	.298	103688-2	3	103974-2	
		9	10	2.00	.198	103688-1	2	103974-1	
				PLATING			HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 05 NOV 1986  
 CHK P.C.DEJONG 11-12-86  
 APVD P.C.DEJONG 11-13-86

TE Connectivity

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM

SIZE A2 CAGE CODE 00779 DRAWING NO 103974 RESTRICTED TO -

SCALE 4:1 SHEET 1 of 1 REV K2

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK  
 CONTACTS: PHOS BRONZE

FINISH: SEE TABLE

WEIGHT: -

CUSTOMER DRAWING

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103974-2](#)