

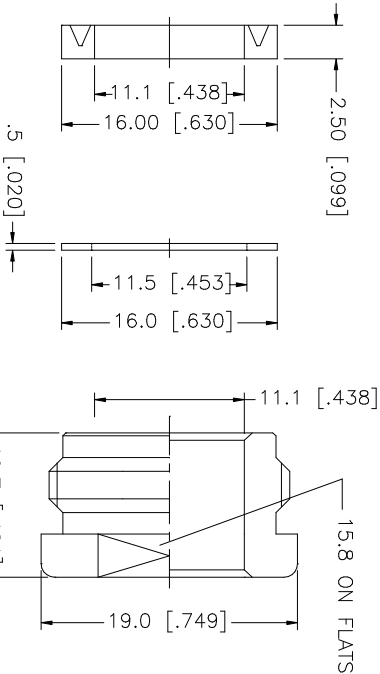
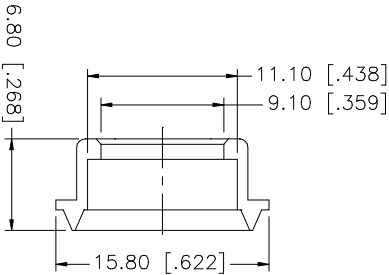
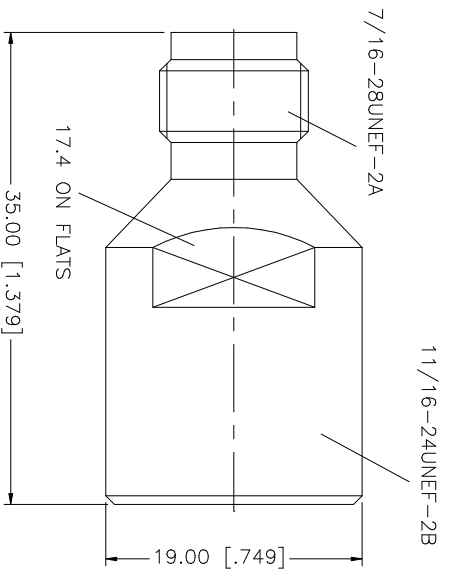


REV.	DATE	DESCRIPTION
NC	10/28/99	INITIAL RELEASE
A	10/18/05	UPDATE DRAWING FORMAT AND DESCRIPTION

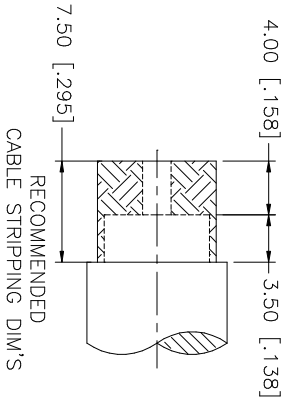

8	CONTACT PIN	PHOS. BRONZE	GOLD	1	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION
7	NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	10/18/05
6	WASHER	BRASS	NICKEL	1	0.5 - 8mm ± 0.20mm	CHECKED		
5	GASKET	SILICONE	RED	1	8 - 30mm ± 0.40mm	ISSUED		
4	BRAID CLAMP	BRASS	NICKEL	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	INSULATOR	TEFLON	NATURAL	1	UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:	CAD FILE	C:/122/122446.DWG	PART NO.
2	BODY	BRASS	NICKEL	1	.020 - .315 = ± 0.007"	DWG. NO.	122446.DWG	122446
1	DESCRIPTION	MATERIAL	FINISH	QTY	.315 - 1.180 = ± 0.015"	REV.	A	SIZE
					1.180 - 4.724 = ± 0.020"	SCALE	NA	

Amphenol Connex

TNC CLAMP JACK
(FOR RG-8/U, 213/U, 214/U)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122446](#)