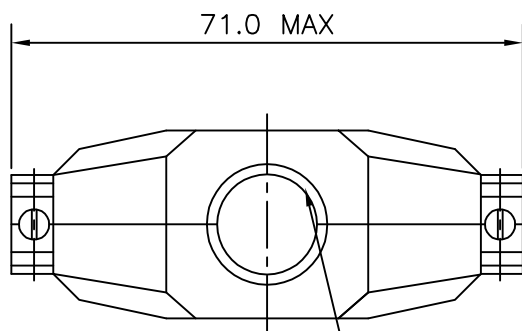
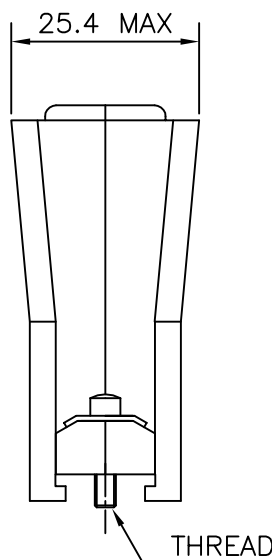
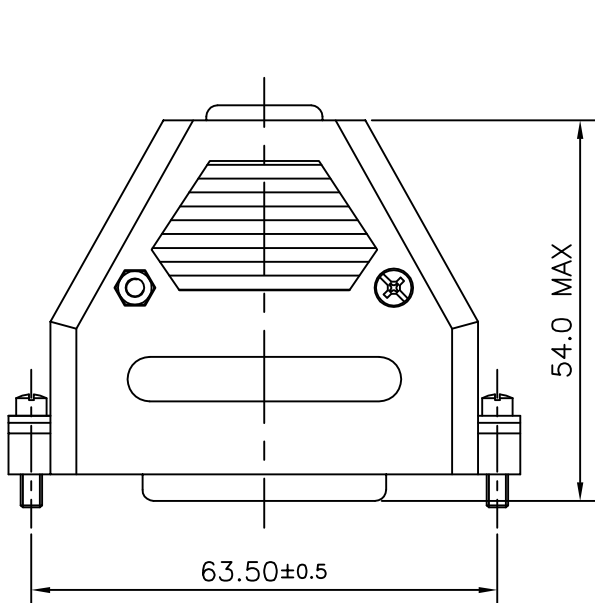


1

2




2	8630-CH37UNCLF	UNC 440
1	8630-CH37M3LF	M3
SL.NO.	PART NO:	THREAD

CABLE ENTRY $\phi 14.0$ MAX.

"This LF product meets European Union Directives and other country regulations as described in GS-47-0004"

Packaging as per GS-14-920

MATERIALS:
1.BS UNFILLED UL 94 HB (STANDARD)
2.TEMP RANGE -55°C TO +85°C

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D—SUB										
ltr	ecn no	dr	date	tolerances unless otherwise specified							title CONNECTOR HOOD 37 POS									
H	ELX-I-25452	GREGAR	2016-11-25	angles	linear	—														
						.00±0.1														
				O°±1°		—				scale NTS	dwg no sheet 1 of 1 size C—DSUB—0025 A4 type Product Customer Drawing									
				dr	MINI K VANDANATH	1995-09-09														
				engr	MITHUN PAUL	2016-11-25														
				chr	GREGAR MATHEW	2016-11-25														
				appd	BIJU K PAUL	2016-11-25														
sheet index	revision	H																		
	sheet	1																		

form: A4-2016-02-24

1

2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[8630CH37M3LF](#) [8630CH37M3](#) [8630CH37UNC](#) [8630CH37UNCLF](#)