


NOTE: TERMINALS 4,5,6 ARE FOUND ONLY ON DP VERSIONS (-3, -4)



Technical drawing of a mechanical part with dimensions:

- Top horizontal dimension: 0.252 ± 0.020 [6.40 ± .50]
- Right vertical dimension: 0.189 ± 0.020 [4.80 ± .50]
- Bottom vertical dimension: 0.043 [1.10]

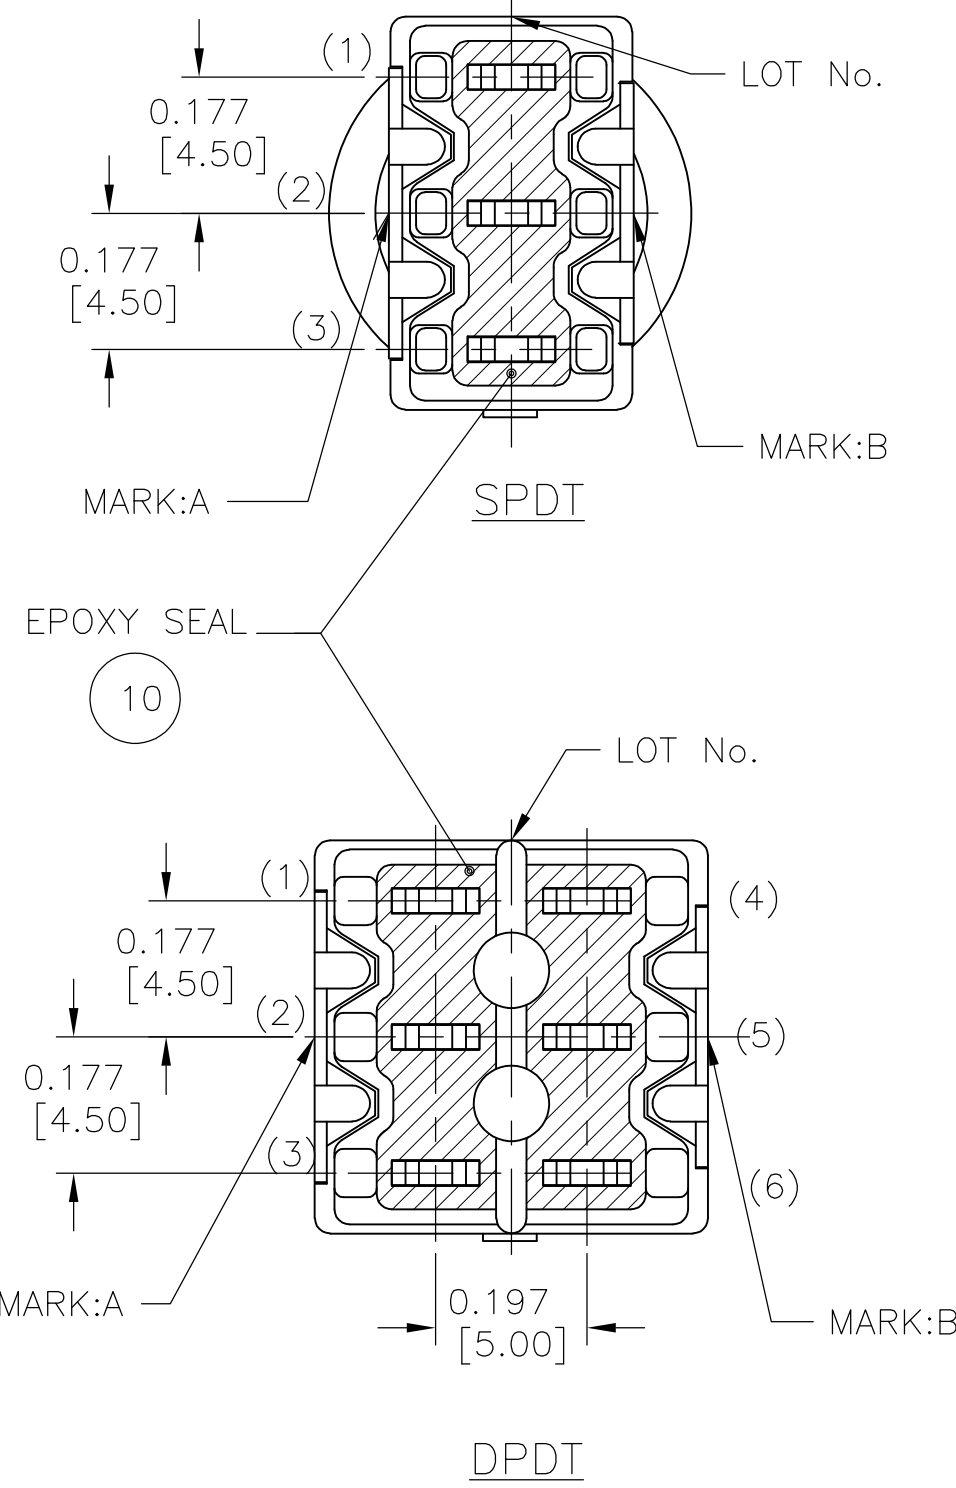

The image contains two technical drawings of a circular panel. The left drawing shows the panel 'WITHOUT LOCKING RING' with a maximum panel thickness of .118 [3mm]. It features a large circle with a diameter of 0.252 [6.40] and a small rectangular feature on the right with a height of 0.028 [.70] and a width of 0.232 [5.90]. The right drawing shows the panel 'WITH STANDARD LOCKING RING' with a maximum panel thickness of .079 [2mm]. It features a large circle with a diameter of 0.256 [6.50] and a smaller circle on the right with a diameter of 0.087 [2.20]. The distance between the center of the large circle and the center of the small circle is 0.244 [6.20].

WITHOUT LOCKING RING
MAXIMUM PANEL THICKNESS:
.118 [3mm]

WITH STANDARD LOCKING RING
MAXIMUM PANEL THICKNESS:
.079 [2mm]


Technical drawing of a 1/2" x 1/2" x 1/2" hex nut. The drawing shows the top and side views. Key dimensions and features include:

- Top view: A regular hexagon with a width of 0.177 [4.50] and a height of 0.177 [4.50]. The distance between the center of the hole and the nearest corner is 0.197 [5.00].
- Side view: A hexagonal profile with a height of 0.177 [4.50]. The distance from the top face to the center of the hole is 0.177 [4.50].
- Bottom view: A regular hexagon with a width of 0.177 [4.50] and a height of 0.177 [4.50]. The distance between the center of the hole and the nearest corner is 0.197 [5.00].
- 1POLE: A dimension line indicating the distance from the center of the hole to the nearest corner, labeled 0.197 [5.00].
- 2POLES: A dimension line indicating the distance between the centers of the holes, labeled 0.177 [4.50].
- Ø0.063 [Ø1.60]: The diameter of the hole, indicated by a leader line pointing to the hole.

11 OPERATING TEMP: -20 ~ +85°C
STORAGE TEMP: -40 ~ +85°C

12 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

13 LASER MARKING USED FOR MARKS.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWG RAGHAVENDRA	28JAN11	 TE Connectivity			
			CHK EPPLLEY NA2	28JAN11				
DIMENSIONS: INCHES [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD EPPLLEY NA2	28JAN11	NAME	MPS SERIES PUSHBUTTON	
		0 PLC ±		PRODUCT SPEC		MPS103 (SPDT) & MPS203 (DPDT)		
		1 PLC ±		APPLICATION SPEC		PCB TERMINATION		
		2 PLC ± .010 [.25]						
ANGLES		FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO
-		-		-		A1	00779	C-1977740
MATERIAL			CUSTOMER DRAWING			RESTRICTED TO		
-						-		
						SCALE 4:1 SHEET 1 of 1 REV B		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MPS103FPC](#)