


Drawing for packing (FREE)

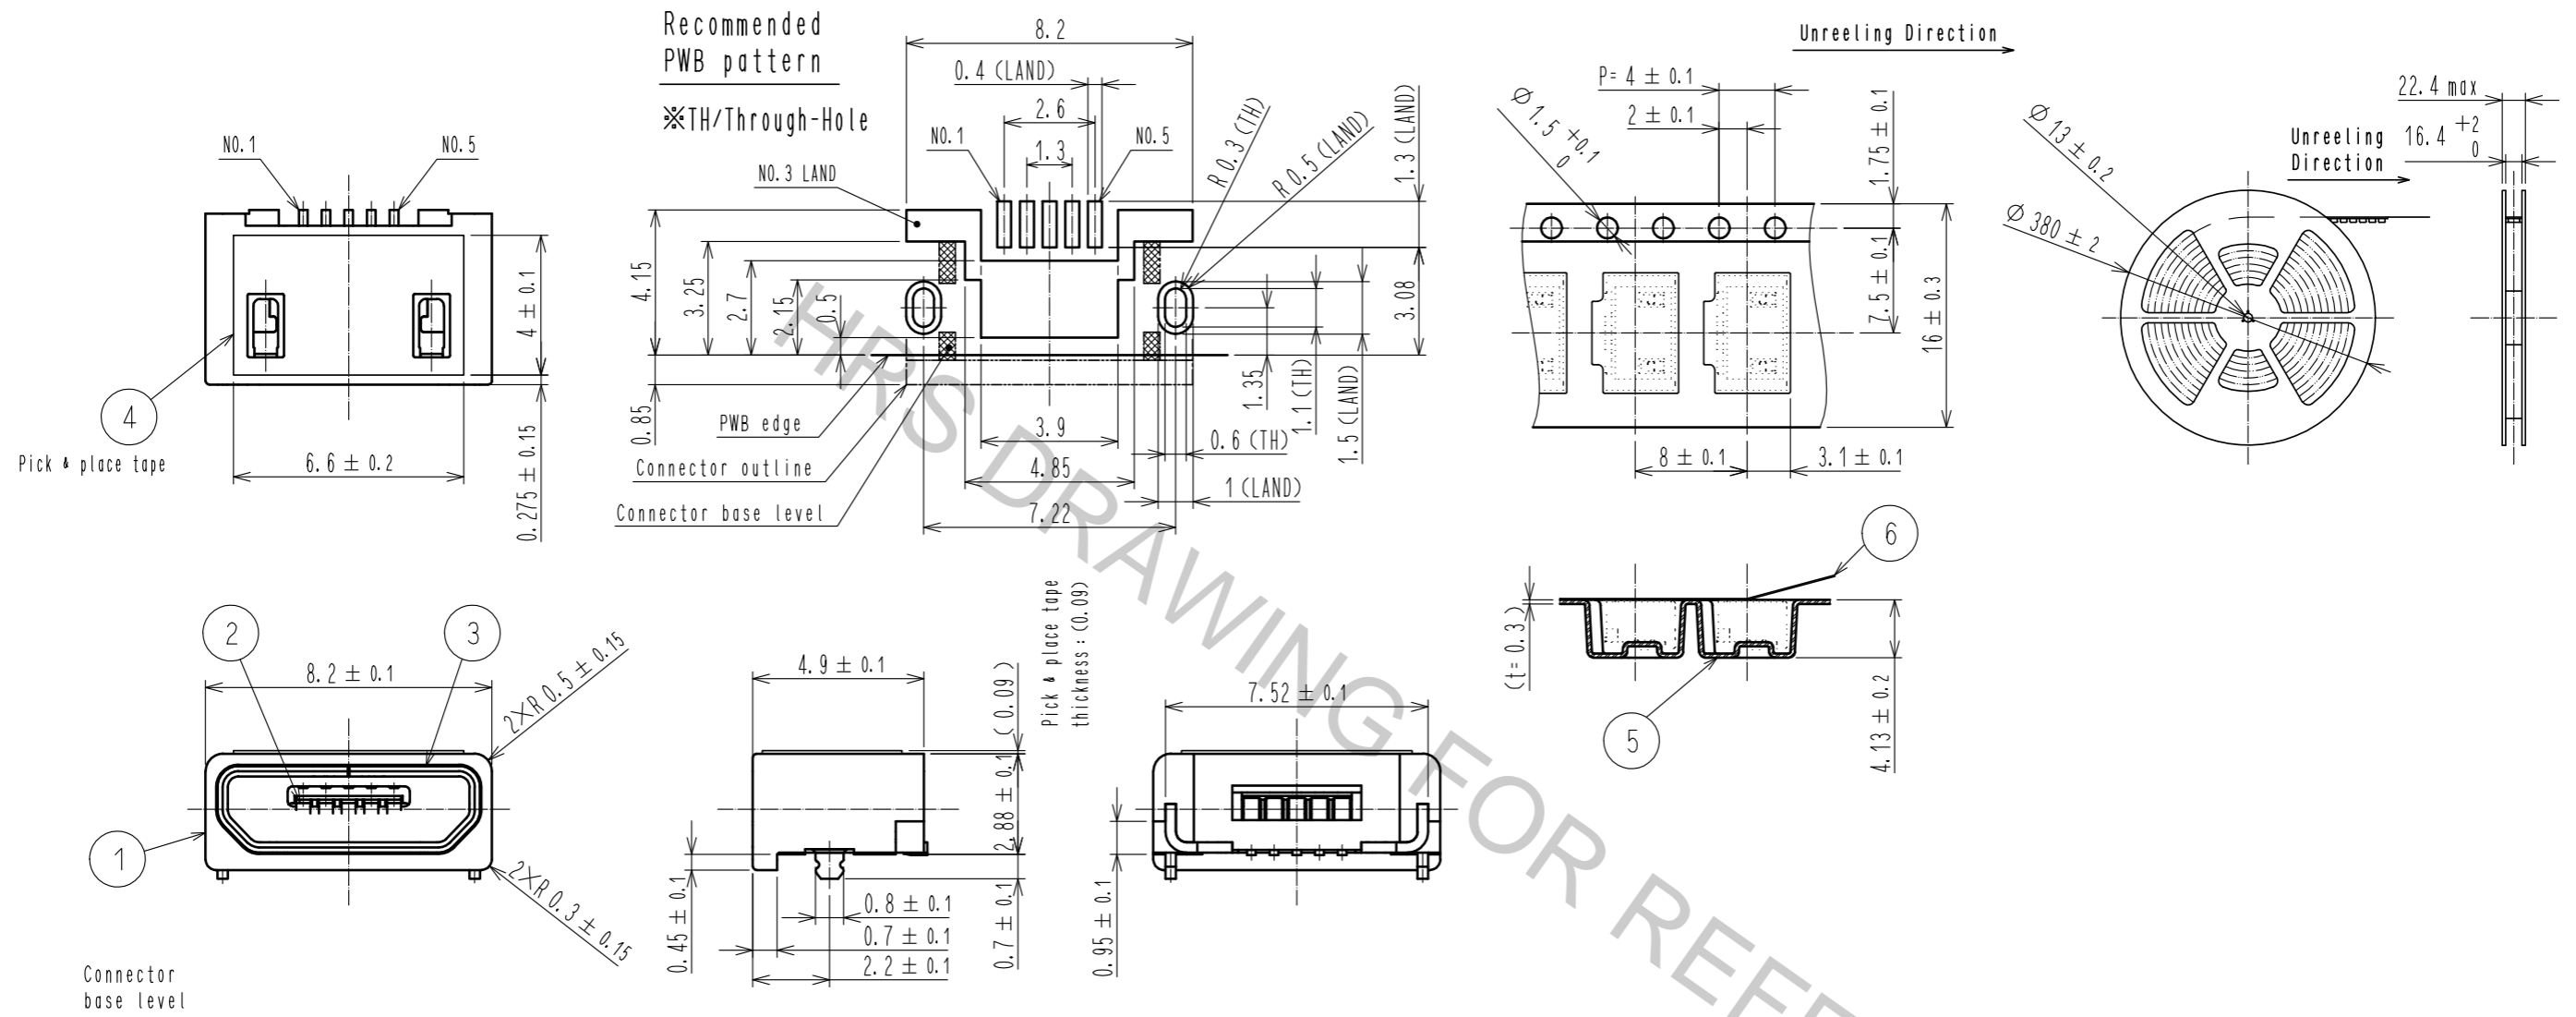

- Remark) 1. Co-planarity is within 0.08mm
 2. Plating
 Contact area: Palladium -Nickel 0.75µm MIN + Gold 0.05µm MIN
 Lead area: Gold 0.05µm MIN
 Under plating: Nickel 2µm MIN
 3. Opening area shape: Conform to USB2.0 standard
 4. Per reel: 3000 pcs

3	Stainless-Steel	Gold 0.01µm min (Selective mating and soldering area) Lubricant	6	PE	Top cover tape
2	Copper-Alloy		5	PS	Embossed carrier tape
1	LCP	Black UL94V-0	4	PI	Pick & place tape
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-00000909	DESIGNED TY. MIURA
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU CHECKED : TA. ASO DESIGNED : WR. YAMADA DRAWN : WR. YAMADA	11.06.20 11.06.20 11.06.20 11.06.20	DRAWING NO. EDC3-126992-02	CHECKED NM. NISHIMATSU
				PART NO. ZX62WD1-B-5PC	DATE 17.03.24
				CODE NO. CL242-0121-3-00	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[ZX62WD1-B-5PC](#)