
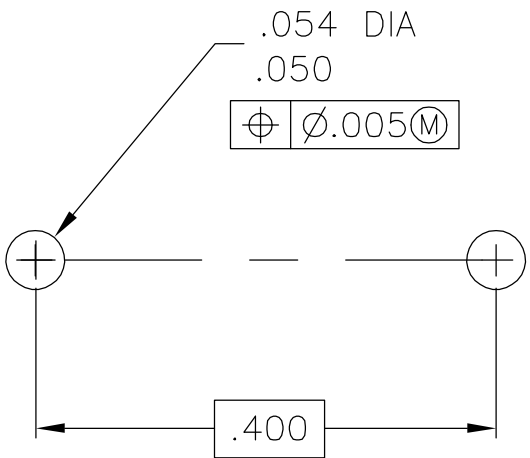
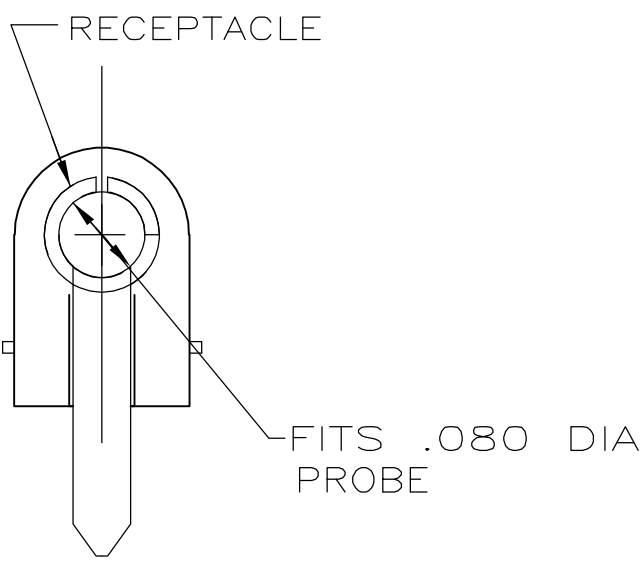


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	DWN
			A	DRAWN	21JUL05	JR

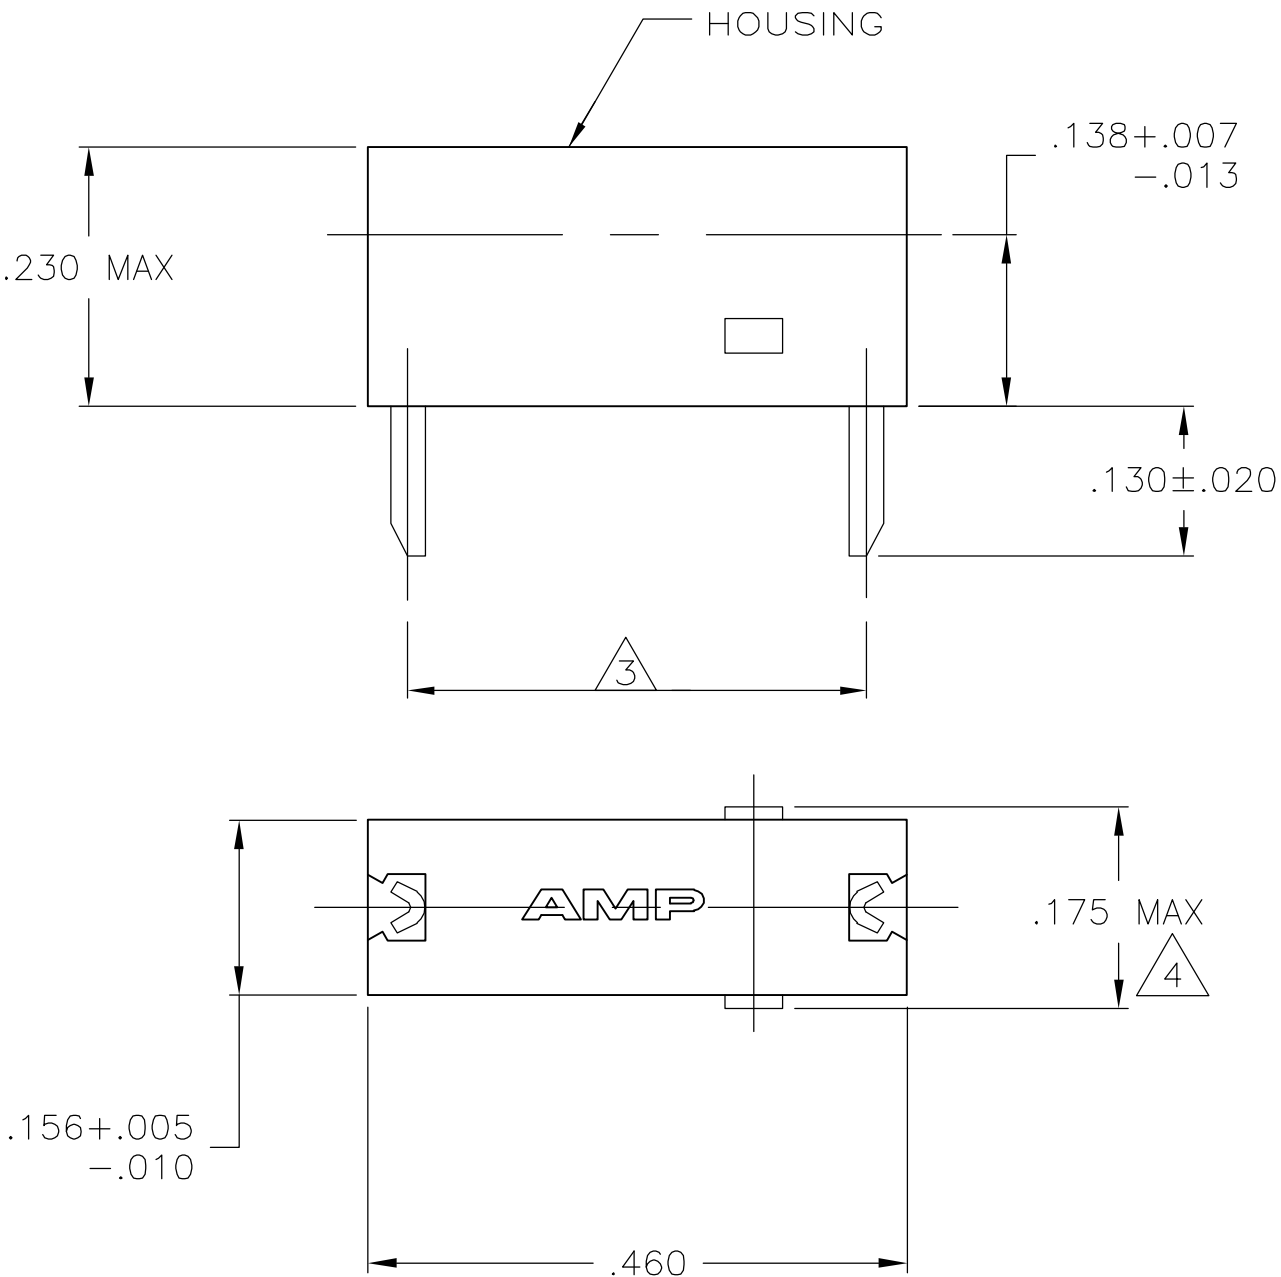

RECOMMENDED MOUNTING HOLE PATTERN

- 1 OPERATION TEMPERATURE IS 105° C MAX.
- 2 RETENTION FORCE – 16 OUNCES MIN INITIALLY.
6 OUNCES MIN AFTER 500 CYCLES.
- 3 REFER TO MOUNTING HOLE PATTERN.
- △.175 MAX TO BE MEASURED ACROSS THE CUT-OFF TABS.

NYLON 6/6; WHITE	BRASS – TIN/NICKEL	1-521799-9
NYLON 6/6; GREEN	BRASS – TIN/NICKEL	1-521799-5
NYLON 6/6; YELLOW	BRASS – TIN/NICKEL	1-521799-4
NYLON 6/6; RED	BRASS – TIN/NICKEL	1-521799-2
NYLON 6/6; BLACK	BRASS – TIN/NICKEL	1-521799-0
HOUSING – MATERIAL; COLOR	RECEPTACLE – MATERIAL; FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 15JUL05 CHK E. HOWARD 21JUL05 APVD E. HOWARD 21JUL05 PRODUCT SPEC APPLICATION SPEC WEIGHT –
DIMENSIONS: -mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .015 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	NAME ASSEMBLY, TEST PROBE - - SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C=521799 -
MATERIAL SEE TABLE	SEE TABLE	CUSTOMER DRAWING SCALE 6:1 SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-521799-5](#)