



# wakefield-vette


| Standard P/N | Nominal Dimensions |                 |                 | Semiconductor Mounting Hole Pattern | Thermal Performance at Typical Load |  | Weight lbs. (grams) |
|--------------|--------------------|-----------------|-----------------|-------------------------------------|-------------------------------------|--|---------------------|
|              | Width in. (mm)     | Length in. (mm) | Height in. (mm) |                                     | Natural Convection                  | Forced Convection                        |                     |
| 441K         | 4.750 (120.7)      | 5.500 (139.7)   | 4.500 (114.3)   | None                                | 34°C @ SOW<br>47°C @ 80W            | 0.30°C/W @ 250 LFM<br>0.19°C/W @ 600 LFM | 1.9700 (893.59)     |

## MECHANICAL DIMENSIONS 441 SERIES (EXTRUSION PROFILE 1273)

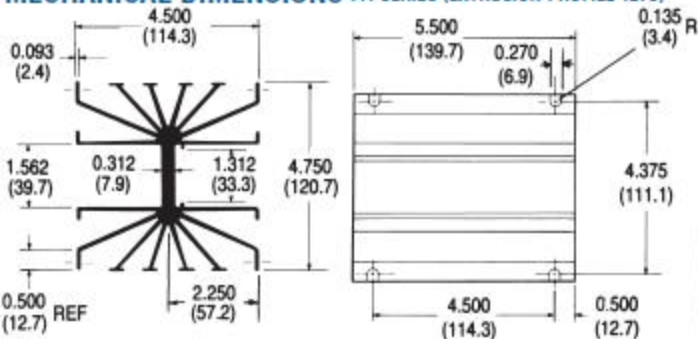

**SEMICONDUCTOR MOUNTING HOLE**

**NATURAL AND FORCED CONVECTION CHARACTERISTICS**

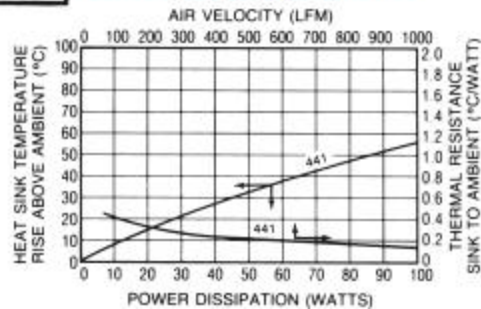

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wakefield-Vette:](#)

[441K](#)