

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

[Home](#)
[About Us](#)
[Contact Us](#)

© COPYRIGHT - By -

By -

ALL RIGHTS RESERVED

REVISIONS

P	LTR
---	-----

LIR

DESCRIPTION

DATE _____

NAME _____

APVD

REVISÉ



PER ECO-

6-00630.3

08AUG20


NK

MM

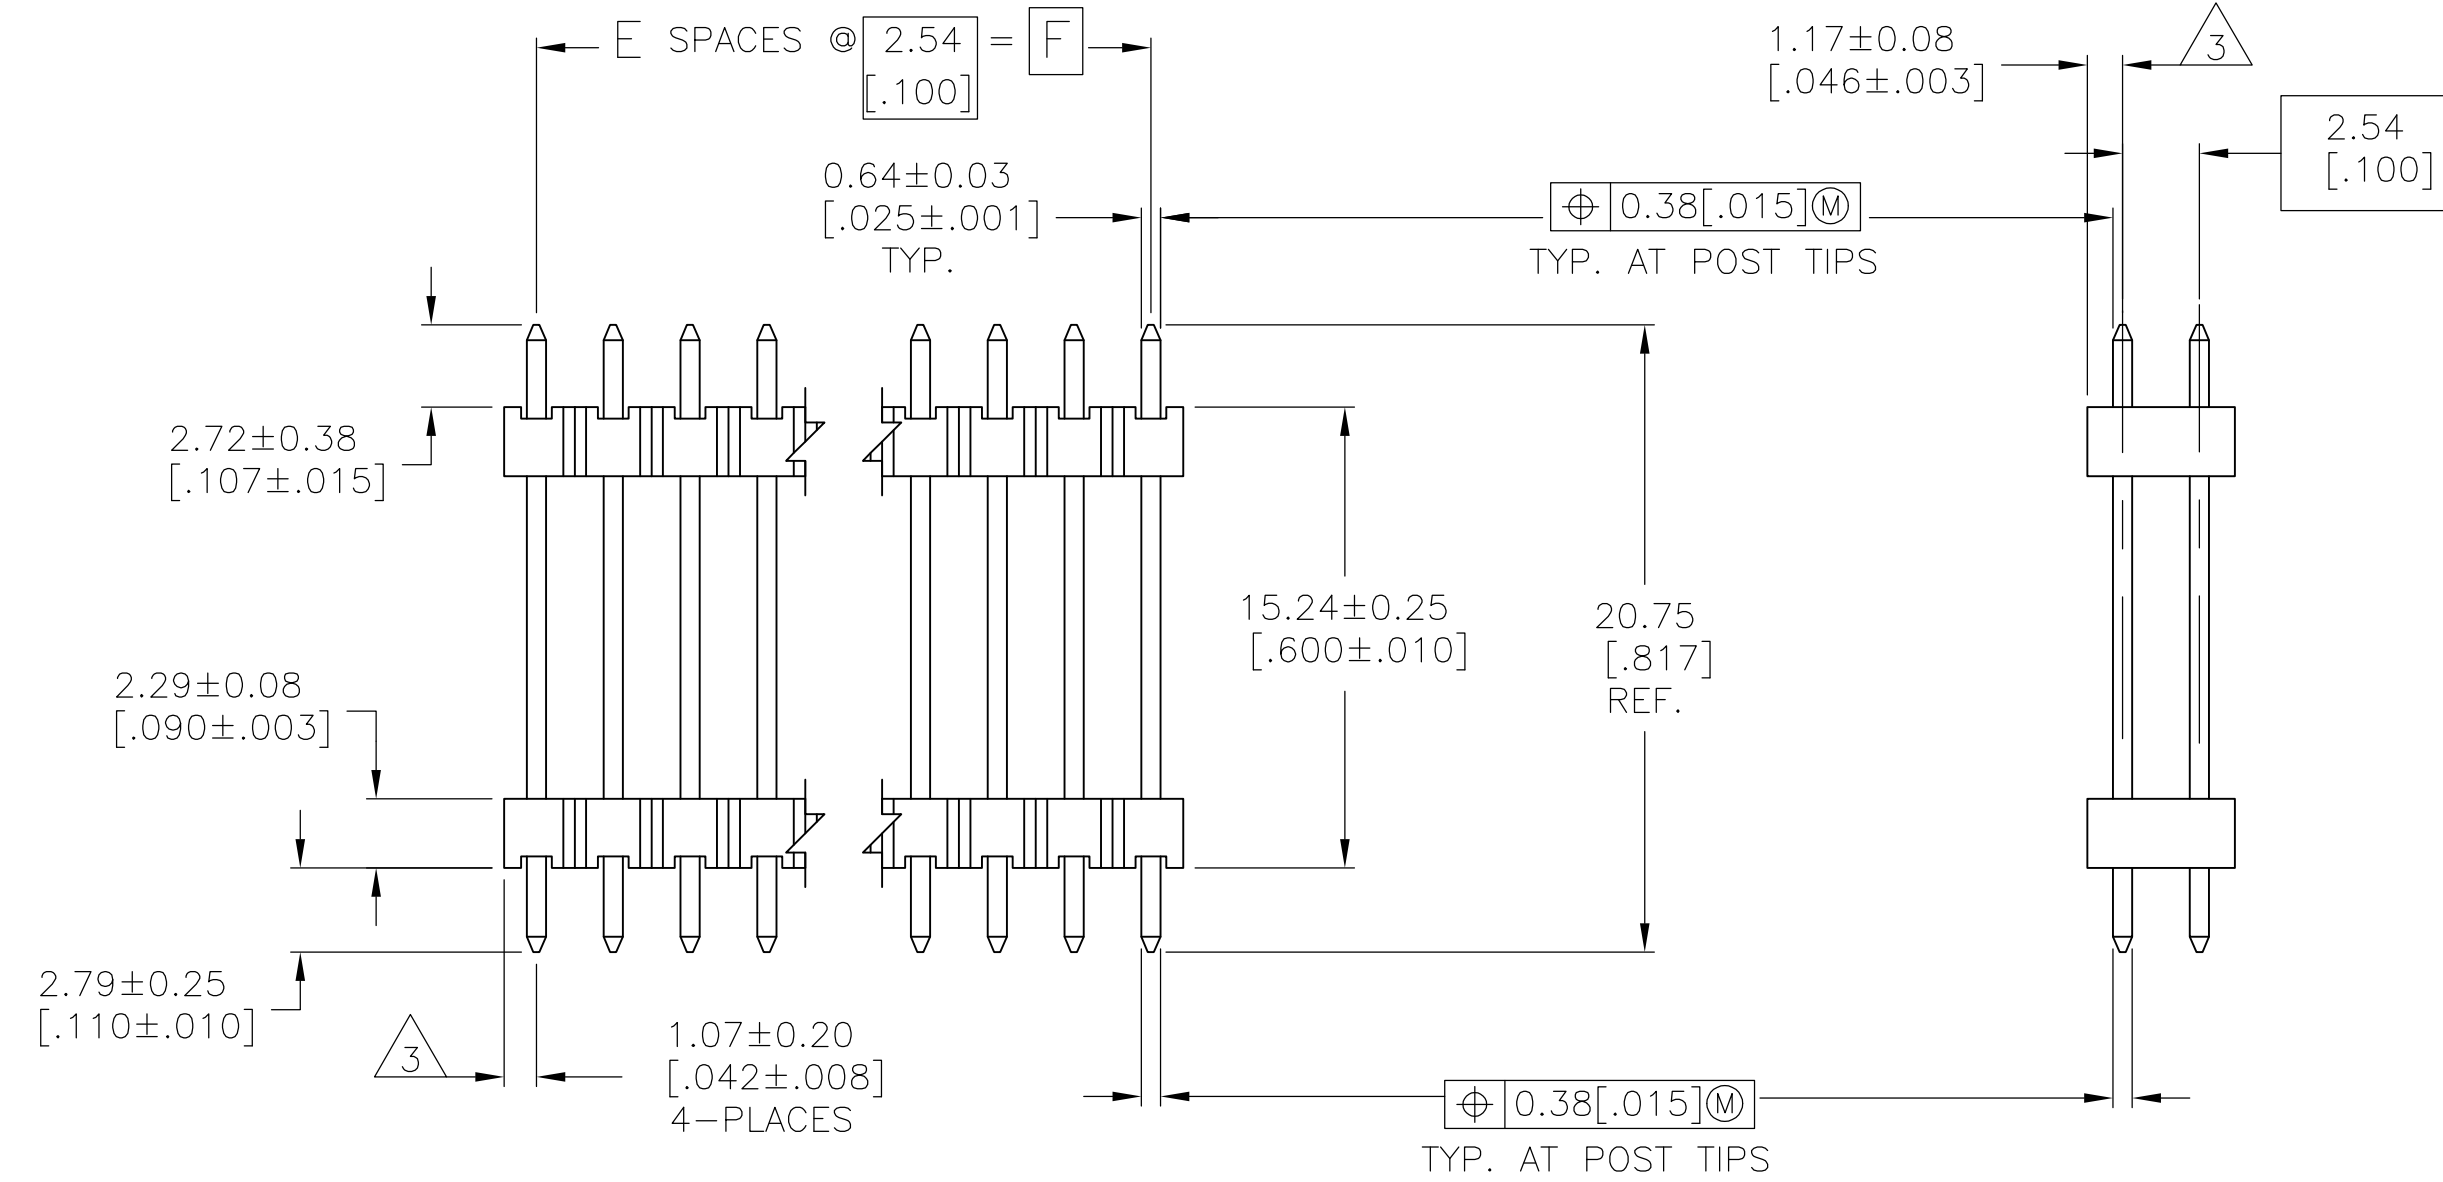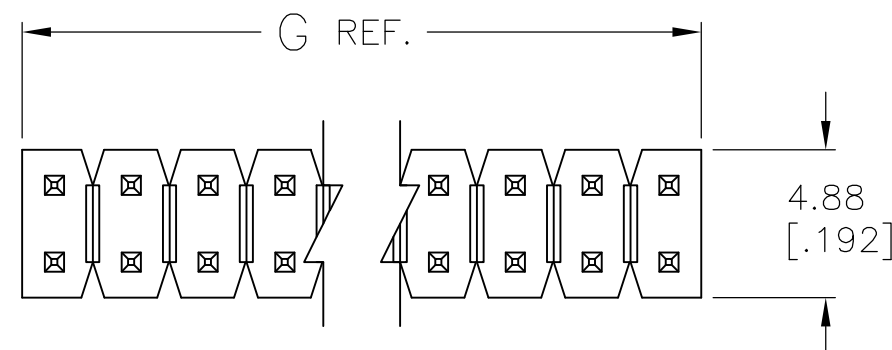

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	—9—146491—0—	
		98.65 [3.884]	96.52 [3.800]	38	78	—8—146491—9—	
		96.11 [3.784]	93.98 [3.700]	37	76	—8—146491—8—	
		93.57 [3.684]	91.44 [3.600]	36	74	—8—146491—7—	
		91.03 [3.584]	88.90 [3.500]	35	72	—8—146491—6—	
		88.49 [3.484]	86.36 [3.400]	34	70	—8—146491—5—	
		85.95 [3.384]	83.82 [3.300]	33	68	—8—146491—4—	
		83.41 [3.284]	81.28 [3.200]	32	66	—8—146491—3—	
		80.87 [3.184]	78.74 [3.100]	31	64	—8—146491—2—	
		78.33 [3.084]	76.20 [3.000]	30	62	—8—146491—1—	
		75.79 [2.984]	73.66 [2.900]	29	60	—8—146491—0—	
		73.25 [2.884]	71.12 [2.800]	28	58	—7—146491—9—	
		70.71 [2.784]	68.58 [2.700]	27	56	—7—146491—8—	
		68.17 [2.684]	66.04 [2.600]	26	54	—7—146491—7—	
		65.63 [2.584]	63.50 [2.500]	25	52	—7—146491—6—	
		63.09 [2.484]	60.96 [2.400]	24	50	—7—146491—5—	
		60.55 [2.384]	58.42 [2.300]	23	48	—7—146491—4—	
		58.01 [2.284]	55.88 [2.200]	22	46	—7—146491—3—	
		55.47 [2.184]	53.34 [2.100]	21	44	—7—146491—2—	
		52.93 [2.084]	50.80 [2.000]	20	42	—7—146491—1—	
		50.39 [1.984]	48.26 [1.900]	19	40	—7—146491—0—	
		47.85 [1.884]	45.72 [1.800]	18	38	—6—146491—9—	
		45.31 [1.784]	43.18 [1.700]	17	36	—6—146491—8—	
		42.77 [1.684]	40.64 [1.600]	16	34	—6—146491—7—	
		40.23 [1.584]	38.10 [1.500]	15	32	—6—146491—6—	
	OBSOLETE		37.69 [1.484]	35.56 [1.400]	14	30	6—146491—5—
		35.15 [1.384]	33.02 [1.300]	13	28	—6—146491—4—	
		32.61 [1.284]	30.48 [1.200]	12	26	—6—146491—3—	
		30.07 [1.184]	27.94 [1.100]	11	24	—6—146491—2—	
		27.53 [1.084]	25.40 [1.000]	10	22	—6—146491—1—	
		24.99 [.984]	22.86 [.900]	9	20	—6—146491—0—	
		22.45 [.884]	20.32 [.800]	8	18	—5—146491—9—	
		19.91 [.784]	17.78 [.700]	7	16	—5—146491—8—	
		17.37 [.684]	15.24 [.600]	6	14	—5—146491—7—	
		14.83 [.584]	12.70 [.500]	5	12	—5—146491—6—	
		12.29 [.484]	10.16 [.400]	4	10	—5—146491—5—	
		9.75 [.384]	7.62 [.300]	3	8	—5—146491—4—	
		7.21 [.284]	5.08 [.200]	2	6	—5—146491—3—	
		4.67 [.184]	2.54 [.100]	1	4	—5—146491—2—	
		2.13 [.084]	— —	—	2	—5—146491—1—	
		PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	4-146491-0-
		98.65 [3.884]	96.52 [3.800]	38	78	3-146491-9-
		96.11 [3.784]	93.98 [3.700]	37	76	3-146491-8-
		93.57 [3.684]	91.44 [3.600]	36	74	3-146491-7-
		91.03 [3.584]	88.90 [3.500]	35	72	3-146491-6-
		88.49 [3.484]	86.36 [3.400]	34	70	3-146491-5-
		85.95 [3.384]	83.82 [3.300]	33	68	3-146491-4-
		83.41 [3.284]	81.28 [3.200]	32	66	3-146491-3-
		80.87 [3.184]	78.74 [3.100]	31	64	3-146491-2-
		78.33 [3.084]	76.20 [3.000]	30	62	3-146491-1-
		75.79 [2.984]	73.66 [2.900]	29	60	3-146491-0-
		73.25 [2.884]	71.12 [2.800]	28	58	2-146491-9-
		70.71 [2.784]	68.58 [2.700]	27	56	2-146491-8-
		68.17 [2.684]	66.04 [2.600]	26	54	2-146491-7-
		65.63 [2.584]	63.50 [2.500]	25	52	2-146491-6-
		63.09 [2.484]	60.96 [2.400]	24	50	2-146491-5-
		60.55 [2.384]	58.42 [2.300]	23	48	2-146491-4-
		58.01 [2.284]	55.88 [2.200]	22	46	2-146491-3-
		55.47 [2.184]	53.34 [2.100]	21	44	2-146491-2-
		52.93 [2.084]	50.80 [2.000]	20	42	2-146491-1-
		50.39 [1.984]	48.26 [1.900]	19	40	2-146491-0-
		47.85 [1.884]	45.72 [1.800]	18	38	1-146491-9-
		45.31 [1.784]	43.18 [1.700]	17	36	1-146491-8-
		42.77 [1.684]	40.64 [1.600]	16	34	1-146491-7-
		40.23 [1.584]	38.10 [1.500]	15	32	1-146491-6-
		37.69 [1.484]	35.56 [1.400]	14	30	1-146491-5-
		35.15 [1.384]	33.02 [1.300]	13	28	1-146491-4-
		32.61 [1.284]	30.48 [1.200]	12	26	1-146491-3-
		30.07 [1.184]	27.94 [1.100]	11	24	1-146491-2-
		27.53 [1.084]	25.40 [1.000]	10	22	1-146491-1-
		24.99 [.984]	22.86 [.900]	9	20	1-146491-0-
		22.45 [.884]	20.32 [.800]	8	18	146491-9-
		19.91 [.784]	17.78 [.700]	7	16	146491-8-
		17.37 [.684]	15.24 [.600]	6	14	146491-7-
		14.83 [.584]	12.70 [.500]	5	12	146491-6-
		12.29 [.484]	10.16 [.400]	4	10	146491-5-
	9.75 [.384]	7.62 [.300]	3	8	146491-4-	
	7.21 [.284]	5.08 [.200]	2	6	146491-3-	
	4.67 [.184]	2.54 [.100]	1	4	146491-2-	
	2.13 [.084]	- -	-	2	146491-1-	
	PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT

OWN	11/8/95
T. HOFFMAN	

CHK	11/22/95
-----	----------

APVD	11/22/95
------	----------

G. DOUNICZKI
PRODUCT SPEC

APPLICATION SPEC

WEIGHT	
--------	--

22

 IE Connectivity

HEADER ASSEMBLY, MOD II,
STACKING DOUBLE ROW

025 SO POST UNSHROUDED

CODE	DRAWING NO
------	------------

779 C-146401

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146491-0](#)