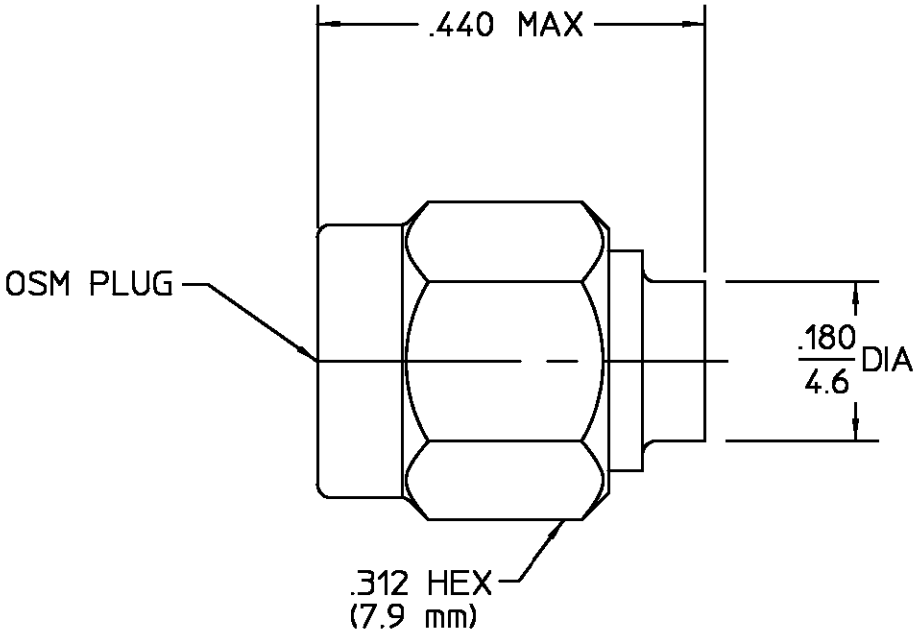


			DESIGNED FOR USE WITH .141 DIA S.R. CABLE CABLE ENTRY DIAMETER MINIMUM		REVISIONS																																																		
			CONTACT .039 HOUSING .144		REV	DESCRIPTION	DATE	APPROVED																																															
					010	RELEASED	2/10/95																																																
<table><tr><td>ELECTRICAL</td><td>MECHANICAL</td><td>ENVIRONMENTAL</td></tr><tr><td>Nominal Impedance (Ohms) 50 Frequency Range (GHz) DC to 18.0 Volt Rating (VRMS MAX) @ Sea Level 500 VSWR 1.05 + .008f(GHz) Insertion Loss (dB MAX) .03 √f(GHz) RF Leakage (dB MIN) -(90-f(GHz)) Corona, 70,000 Ft (VRMS MIN) 375 Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000 Contact Resistance (Milliohms MAX) Center Contact 3.0 Outer Contact 2.0 Cable to Housing .05 RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1000 I.R.(Megohms MIN) 5,000</td><td>Interface Dimensions MIL-STD-348, Fig. 310.1 Recommended Mating Torque 7 to 10 in-LBs Mating Characteristics: Insertion (MAX Lbs) N/A Withdrawal (MIN Oz) N/A Force to Engage and Disengage (In/Lbs MAX) 2.0 Center Contact Captivation Axial (Lbs) N/A Radial (In/Oz) N/A Cable Retention Axial Force (Lbs) 60 Torque (In/Oz) 55 Weight (Grams) T.B.D.</td><td>Temperature Rating -65°C to 105°C Vibration MIL-STD-202, Method 204, Condition D Shock MIL-STD-202, Method 213, Condition I Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 115°C Moisture Resistance MIL-STD-202, Method 106, Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray</td></tr></table>			ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50 Frequency Range (GHz) DC to 18.0 Volt Rating (VRMS MAX) @ Sea Level 500 VSWR 1.05 + .008f(GHz) Insertion Loss (dB MAX) .03 √f(GHz) RF Leakage (dB MIN) -(90-f(GHz)) Corona, 70,000 Ft (VRMS MIN) 375 Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000 Contact Resistance (Milliohms MAX) Center Contact 3.0 Outer Contact 2.0 Cable to Housing .05 RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1000 I.R.(Megohms MIN) 5,000	Interface Dimensions MIL-STD-348, Fig. 310.1 Recommended Mating Torque 7 to 10 in-LBs Mating Characteristics: Insertion (MAX Lbs) N/A Withdrawal (MIN Oz) N/A Force to Engage and Disengage (In/Lbs MAX) 2.0 Center Contact Captivation Axial (Lbs) N/A Radial (In/Oz) N/A Cable Retention Axial Force (Lbs) 60 Torque (In/Oz) 55 Weight (Grams) T.B.D.	Temperature Rating -65°C to 105°C Vibration MIL-STD-202, Method 204, Condition D Shock MIL-STD-202, Method 213, Condition I Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 115°C Moisture Resistance MIL-STD-202, Method 106, Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	<table><tr><td>HOUSING</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>COUPLING NUT</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303</td><td>PASSIVATE PER ASTM-A-380</td></tr><tr><td>DIELECTRIC</td><td>TFE FLUOROCARBON PER ASTM-D-1457</td><td>N/A</td></tr><tr><td>CENTER CONTACT</td><td>BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>RETAINING RING</td><td>BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H</td><td>N/A</td></tr><tr><td>GASKET</td><td>SILICONE RUBBER PER ZZ-R-765</td><td>N/A</td></tr><tr><td>COMPONENT</td><td>MATERIAL</td><td>FINISH</td></tr></table>		HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204	COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A-380	DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A	CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A	GASKET	SILICONE RUBBER PER ZZ-R-765	N/A	COMPONENT	MATERIAL	FINISH	<table><tr><td rowspan="2">UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°</td><td>DRAWN BY  DATE 2/10/95</td><td rowspan="2"></td><td colspan="2">AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599</td></tr><tr><td>CHECKED BY </td><td>APPD BY  DATE 2/10/95</td></tr><tr><td rowspan="3">These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.</td><td>USE ASS'Y PROCEDURE</td><td colspan="3">TITLE OSM STRAIGHT CABLE PLUG DIRECT SOLDER ATTACHMENT M39012/79B3102 CAT B</td></tr><tr><td>408-04919 NO. AP. (20-544)</td><td>SIZE B</td><td>CODE IDENT NO. 26805</td><td>2001-8102-92</td></tr><tr><td></td><td>SCALE 5:1</td><td colspan="2">SHEET 1 OF 1</td></tr></table>				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	DRAWN BY  DATE 2/10/95		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		CHECKED BY 	APPD BY  DATE 2/10/95	These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSM STRAIGHT CABLE PLUG DIRECT SOLDER ATTACHMENT M39012/79B3102 CAT B			408-04919 NO. AP. (20-544)	SIZE B	CODE IDENT NO. 26805	2001-8102-92		SCALE 5:1	SHEET 1 OF 1	
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																					
Nominal Impedance (Ohms) 50 Frequency Range (GHz) DC to 18.0 Volt Rating (VRMS MAX) @ Sea Level 500 VSWR 1.05 + .008f(GHz) Insertion Loss (dB MAX) .03 √f(GHz) RF Leakage (dB MIN) -(90-f(GHz)) Corona, 70,000 Ft (VRMS MIN) 375 Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000 Contact Resistance (Milliohms MAX) Center Contact 3.0 Outer Contact 2.0 Cable to Housing .05 RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1000 I.R.(Megohms MIN) 5,000	Interface Dimensions MIL-STD-348, Fig. 310.1 Recommended Mating Torque 7 to 10 in-LBs Mating Characteristics: Insertion (MAX Lbs) N/A Withdrawal (MIN Oz) N/A Force to Engage and Disengage (In/Lbs MAX) 2.0 Center Contact Captivation Axial (Lbs) N/A Radial (In/Oz) N/A Cable Retention Axial Force (Lbs) 60 Torque (In/Oz) 55 Weight (Grams) T.B.D.	Temperature Rating -65°C to 105°C Vibration MIL-STD-202, Method 204, Condition D Shock MIL-STD-202, Method 213, Condition I Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 115°C Moisture Resistance MIL-STD-202, Method 106, Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray																																																					
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204																																																					
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A-380																																																					
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A																																																					
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204																																																					
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A																																																					
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A																																																					
COMPONENT	MATERIAL	FINISH																																																					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	DRAWN BY  DATE 2/10/95		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																																																				
	CHECKED BY 		APPD BY  DATE 2/10/95																																																				
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSM STRAIGHT CABLE PLUG DIRECT SOLDER ATTACHMENT M39012/79B3102 CAT B																																																					
	408-04919 NO. AP. (20-544)	SIZE B	CODE IDENT NO. 26805	2001-8102-92																																																			
		SCALE 5:1	SHEET 1 OF 1																																																				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2001-8102-92](#)