
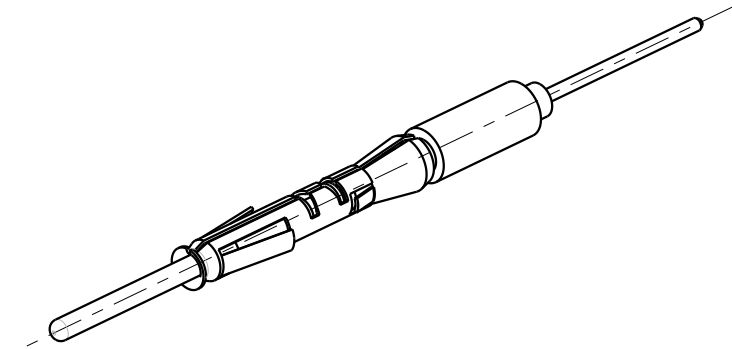


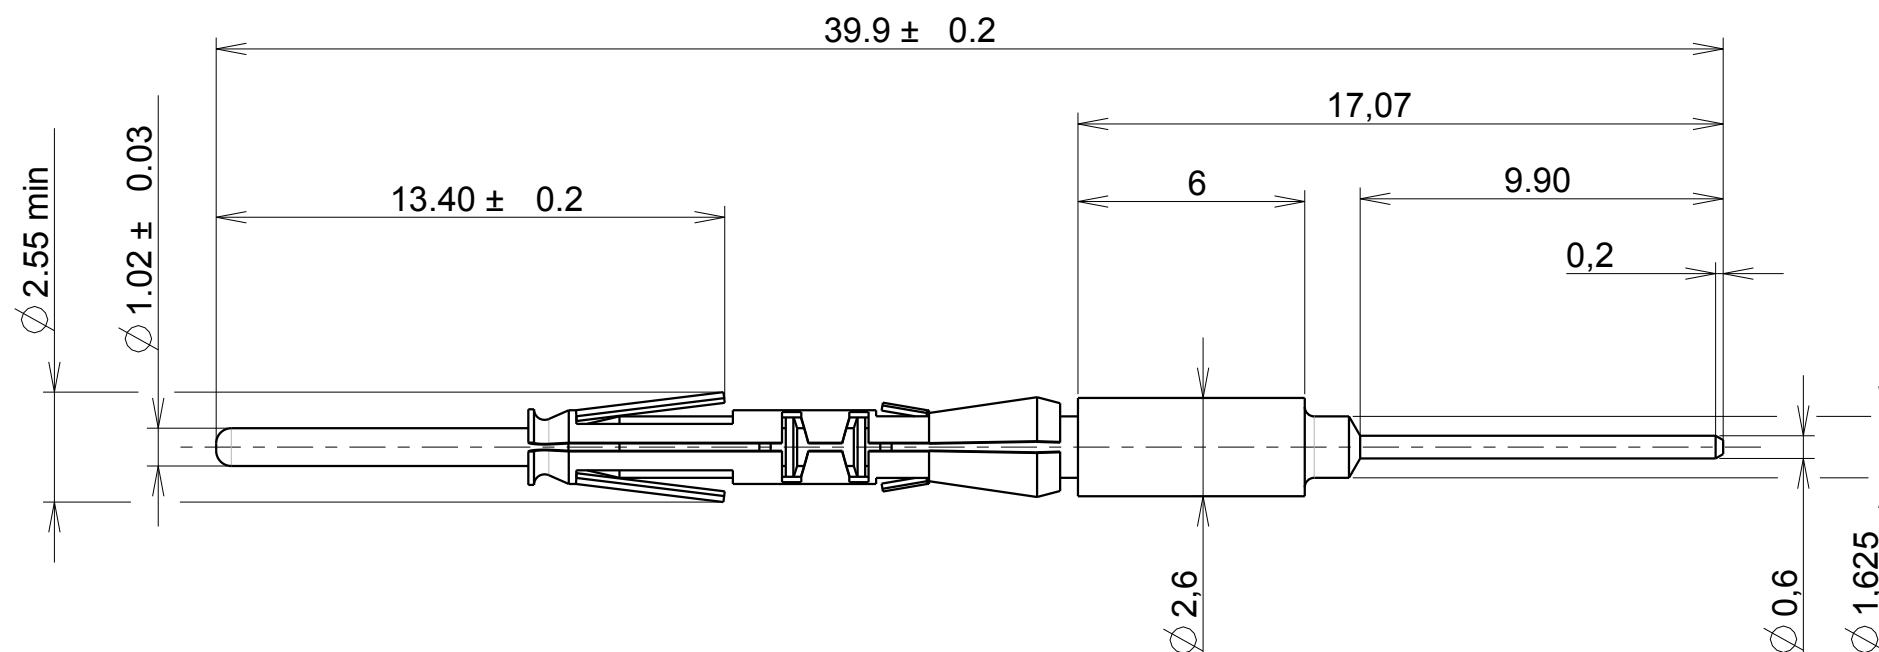

Notes :

The extraction tool is RX20D44
Machined contact


Material :

Contact body:high conductive copper alloy
:plating: K=0.4 micron gold over nickel
Retaining spring:stainless steel

Performance Characteristics :

Contact retention in the body:50N max
Contact insertion force:5N max
Contact separation force:2N min
current rating:7.5 Amps
Contact resistance:6m Ω max
Dielectric withstanding voltage:1500 Vrms min

P/N : RMW50A7K

C	21/03/12	— Update drawing		
ISS	DATE	Latest modification - by: MOREAU F		MOD N°
Designed by:		C. PROVOST	Date: 28/08/03	CUSTOMER DRAWING
TITLE		MALE SPILL CONTACT #20 CONNECTOR UTOW		
Scale			General linear Tolerances: ± 0.1	NPRDS / PROJECT MKSI
5/1				
		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	SOURIAU DRG N° RMW50A7K-C01			SHEET 1 / 1
A3				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Souriau:

RMW50A7K